

**DIMENSION(mm)**

DIMENSION NUMBER	A	B
3	4.60	1.50
4	4.60	2.40
5	4.60	3.00


**ELECTRICAL:**

CURRENT: 1A  
 CONTACT RESISTANCE: < 20mΩ  
 INSULATOR RESISTANCE: > 1000MΩ  
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.  
 OPERATING TEMPERATURE: -55° C TO +105° C

**MATERIAL:**

INSULATOR: GLASS FILLED POLYESTER (UL94V-0)  
 CONTACT: PHOSPHOR BRONZE

**HOW TO ORDER:**

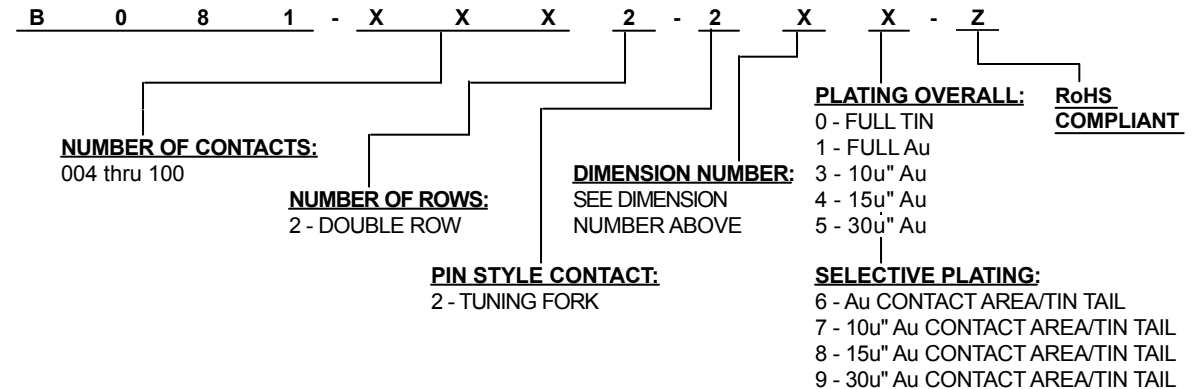

Rev	Drawn	Checked	Approved	Date
0 Issued	S.E.	S.M.	S.M.	02/01/96
A Revised for RoHS Compliance	B.S.	S.M.	S.M.	08/08/08

**SMP TECHNOLOGY, INC.**

RECEPTACLE ASSEMBLY, 2.54mm Pitch, DOUBLE ROW, TUNING FORK

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- 0.15 ANGLE +/- UNIT: mm

SERIES: B081