

2.54mm (0.1") Female Header

2.54mm x 7.87mm (0.1" x 0.31") Pitch

(Single Row)



2231 Series

APPLICATION AND FEATURES


1. High reliable dual-beam phospher bronze contact.
2. Designed for right-angle P.C.Board mounting.
3. Single row 04 to 40 contacts.

SPECIFICATIONS

Current Rating:	3 Amps
Insulator resistance:	5000 Megohms Min.
Contact resistance:	20 m ohm Max.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-40°C to +105°C
Contact Material:	Phosphor Bronze
Insulator Material:	Polyester, UL 94V-0

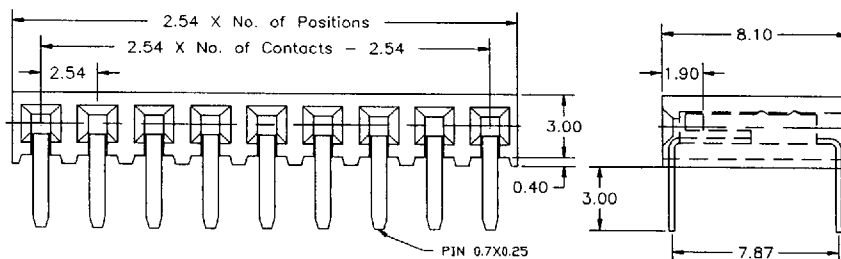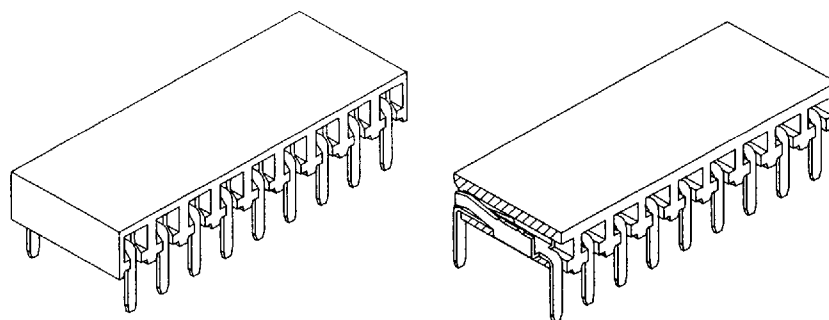

Recommended P.C.Board
Hole Layout



Order Information 2231 Series

Example: 2231-34-R-02

Series No.	Number of Contacts	Connector Type	Contact Plating
2231	04 to 40 Contacts	Right Angle R	Tin Plated 01
			Gold Plated
			Flash 02
			10 μ" 10
			30 μ" 30