


Ordering Information :

$$\frac{D^* - ** SL * TL2}{1 \quad 2 \quad 3}$$

Material :

- * Insulator : UL 94V-0 PBT
- * Contact : Phosphor Bronze

1. No. of circuits
2. Plating:
 U=Gold flash over 30~50?" nickel overall
 W=15?" gold over 30~50?" nickel overall
 Z=30?" gold over 30~50?" nickel overall
 F=Selective gold flash over 30~50?" nickel overall
 J=15?" gold plated selective over 30~50?" nickel overall
 K=30?" gold plated selective over 30~50?" nickel overall
3. TL2=Attached 2 pcs screws instead of rivet

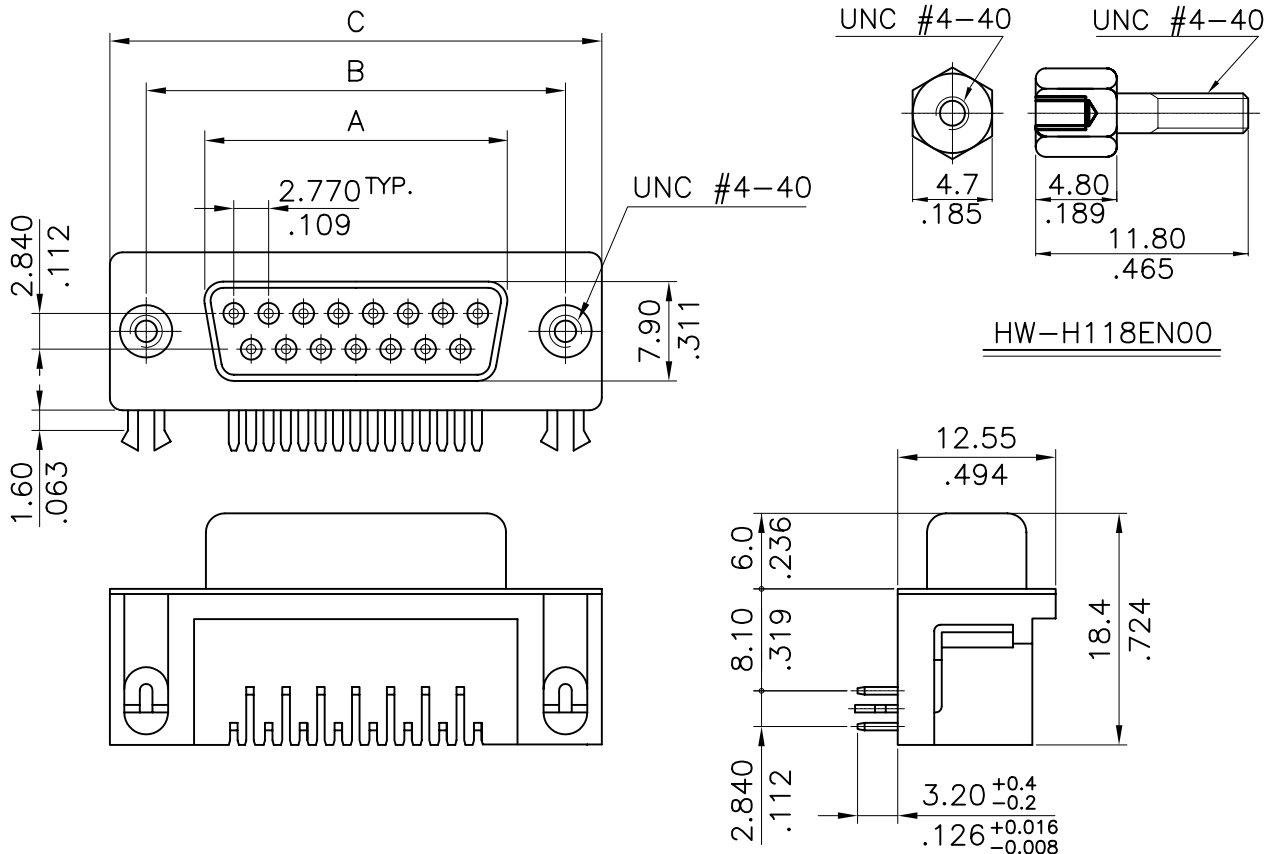

Circuits	Dim.A	Dim.B	Dim.C
DE-09	16.33(.643)	24.990(0.984)	30.8(1.213)
DA-15	24.66(.971)	33.320(1.312)	39.1(1.539)
DB-25	38.38(1.511)	47.040(1.852)	53.0(2.087)
DC-37	54.84(2.159)	63.500(2.500)	69.3(2.728)

LECO CORPORATION				APPROVED BY:		PART NO.:	
				CHECKED BY:		TITLE: 8.10mm(.319") Pitch Foot Print Socket Connector	
GENERAL TOLERANCE				DRAW BY:		DRAWING NO.:	
X. ± X' ± 2'						SCALE	
.X ± $\frac{0.30}{.012}$.X' ±						SIZE	
.XX ± $\frac{0.20}{.008}$.XX' ±				UNITS		SHEET	
.XXX ± $\frac{0.10}{.004}$.XXX' ±				mm		REV.	
				inch		1.6:1	
						A4	
						1/1	
						B	

A
B
C
D
E