

High-precision female headers soldering technique


Low profile, less than 2.7/3.1 mm above P.C.B. - with contact spring for Ø 0.5 mm pins

solder and plug pin Ø 0.76 mm

<p>art. no.</p> <p>MK LP 18 ...</p>			<p>art. no.</p> <p>MK LP 218 ...</p>		
<p>art. no.</p> <p>MK LP 19 ...</p>			<p>art. no.</p> <p>MK LP 219 ...</p>		
<p>please indicate:</p> <p>... no. of contacts one row 1 - 50 two rows 4 - 100</p> <p>... surface G = gold-plated Z = tin-plated</p>					

contact spring: gold-plated

Low profile: 2.7/3.1 mm above P.C.B.; standard profile: 4 mm

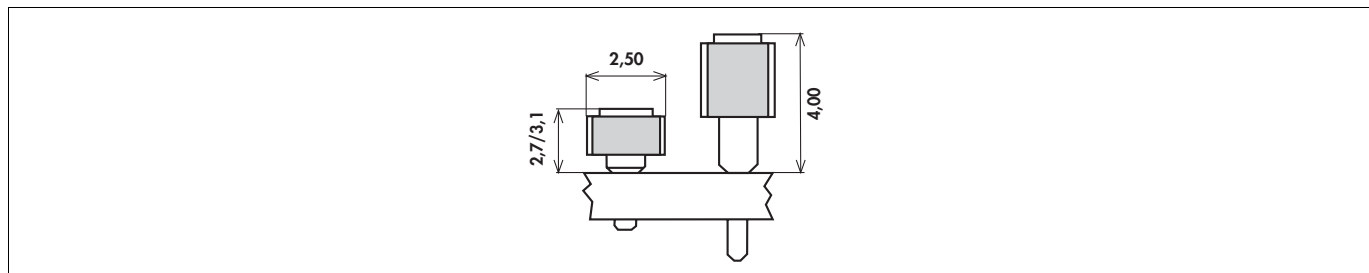

- | | | | |
|------------------------------------|-------------|--------------------------------|--------|
| High-prec. fem. headers 2.54 sold. | → G 31 - 34 | Jump. links 2.00 & 2.54 solder | → G 20 |
| Single precision contacts | → F 2 - 3 | Single contacts metal strip | → G 26 |
| Technical data | → G 75 - 80 | Special male & female headers | → G 19 |
| High-precision female headers | → G 3 - 5 | | |

G 24

A
B
C
D
E
F
G
H
I
K
L
M
N