

DN74LS21




Dual 4-input Positive AND Gates

Description

DN74LS21 contains two 4-input positive isolation AND gate circuits.

Features

- Low power consumption ($P_d = 8.5 \text{ mW}$ typical)
- High speed ($t_{pd} = 9 \text{ ns}$ typical)
- Wide operating temperature range ($T_a = -20$ to $+75^\circ\text{C}$)

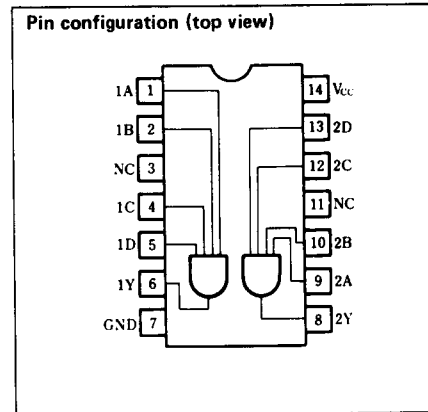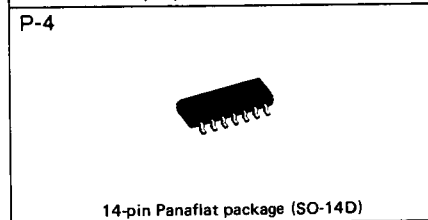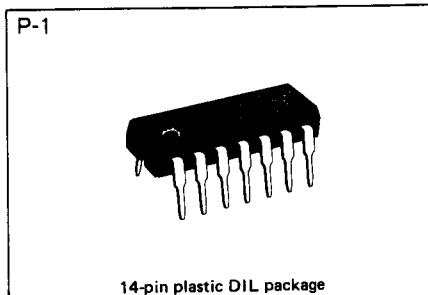

Recommended operating conditions

| Parameter | Sym | Min | Typ | Max | Unit |
|-----------------------------|-----------|------|------|------|------------------|
| Supply voltage | V_{CC} | 4.75 | 5.00 | 5.25 | V |
| Output current | I_{OH} | | | -400 | μA |
| | I_{OL} | | | 8 | mA |
| Operating temperature range | T_{opr} | -20 | 25 | 75 | $^\circ\text{C}$ |

■ DC characteristics (Ta = -20 ~ +75°C)

| Parameter | Sym | Test conditions | Min | Typ* | Max | Unit |
|--------------------------------|------------------|--|-------|------|------|------|
| Input voltage | V _{IH} | | 2.0 | | | V |
| | V _{IL} | | | | 0.8 | V |
| Output voltage | V _{OH} | V _{CC} = 4.75V, V _{IH} = 2V, V _{IL} = 0.8V I _{OH} = -400 μA | • 2.7 | 3.4 | | V |
| | V _{OL1} | V _{CC} = 4.75V, V _{IH} = 2V V _{IL} = 0.8V | | 0.25 | 0.4 | V |
| | V _{OL2} | | | 0.35 | 0.5 | V |
| Input current | I _{IH} | V _{CC} = 5.25V V _I = 2.7V | | | 20 | μA |
| | I _{IL} | V _{CC} = 5.25V V _I = 0.4V | | | -0.4 | mA |
| | I _I | V _{CC} = 5.25V V _I = 7V | | | 0.1 | mA |
| Output short circuit current** | I _{OS} | V _{CC} = 5.25V, V _O = 0V | -15 | | -100 | mA |
| Input clamp voltage | V _{IK} | V _{CC} = 4.75V I _I = -18mA | | | -1.5 | V |
| Supply current | I _{CCH} | V _{CC} = 5.25V, | | 1.2 | 2.4 | mA |
| | I _{CCL} | V _{CC} = 5.25V, | | 2.2 | 4.4 | mA |

* When constant at V_{CC} = 5V, Ta = 25°C.


** Only one output at a time short circuited to GND. Also, short circuit time to GND within 1 second.

■ Switching characteristics (V_{CC} = 5V, Ta = 25°C)


| Parameter | Sym | Test conditions | Min | Typ | Max | Unit |
|------------------------|------------------|---|-----|-----|-----|------|
| Propagation delay time | t _{PLH} | C _L = 15pF, R _L = 2kΩ | | 8 | 15 | ns |
| | t _{PHL} | | | 10 | 20 | ns |

※ Switching parameter measurement information

1. Measurement circuit

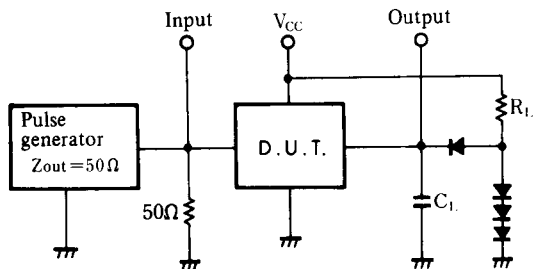

2. Waveforms

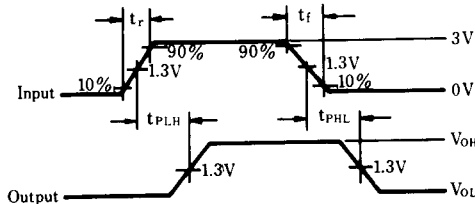

Notes

- C_L includes probe and tool floating capacitance.
- Diodes are all MA161.

Notes

- Input waveform: t_r ≤ 15ns, t_f ≤ 6ns, PRR = 1MHz, duty cycle = 50%.