

2.54mm (0.1") Shrouded Header

(Double Row)

2303 Series

APPLICATION AND FEATURES

1. Assures reliable flat cable-to-P.C.Board interconnection.
2. Fully shrouded.
3. No ejector latches for saving space.

Finish: Tin,Gold or Selective gold


©Note:

Selective gold: gold plated on contact area,
Tin on solder area

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms Min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° - +105°C
 Contact Material: Brass or Phosphor bronze
 Insulator Material: Polyester, UL 94V-0

©Standard: P.B.T

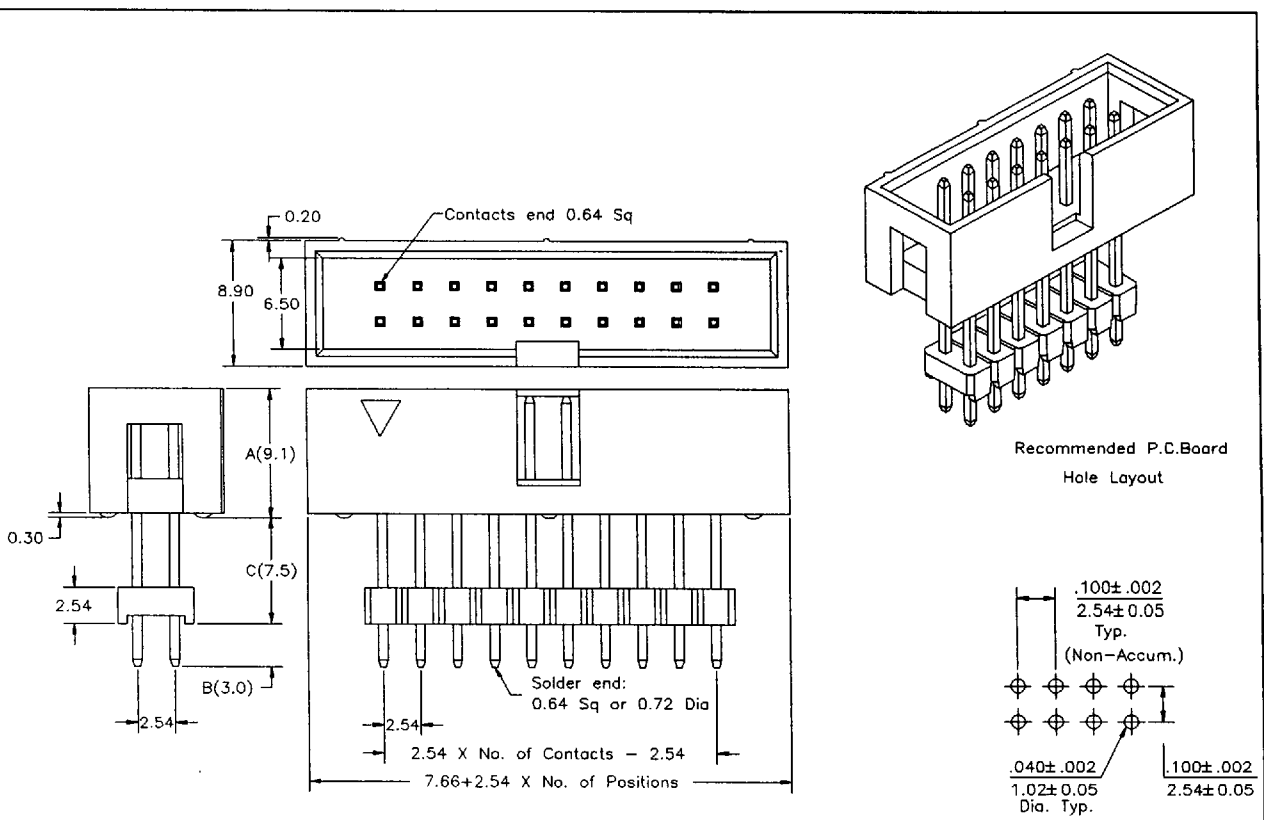

Order Information 2303 Series

Example: 2303-26-S-02-A/C/B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm		
				A	C	B
2303	06,08,10,14,16,20,24, 26,30,34,40,44,48,50, 60,64,	Straight S	Tin Plated 01 Gold Plated Flash 02 10 μ" 10 30 μ" 30	9.1	7.5	3.0

SINGATRON ENT. CO., LTD. Tel.: (909) 464-1883 Fax.: (909) 464-1884

9011184 000097 457