


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

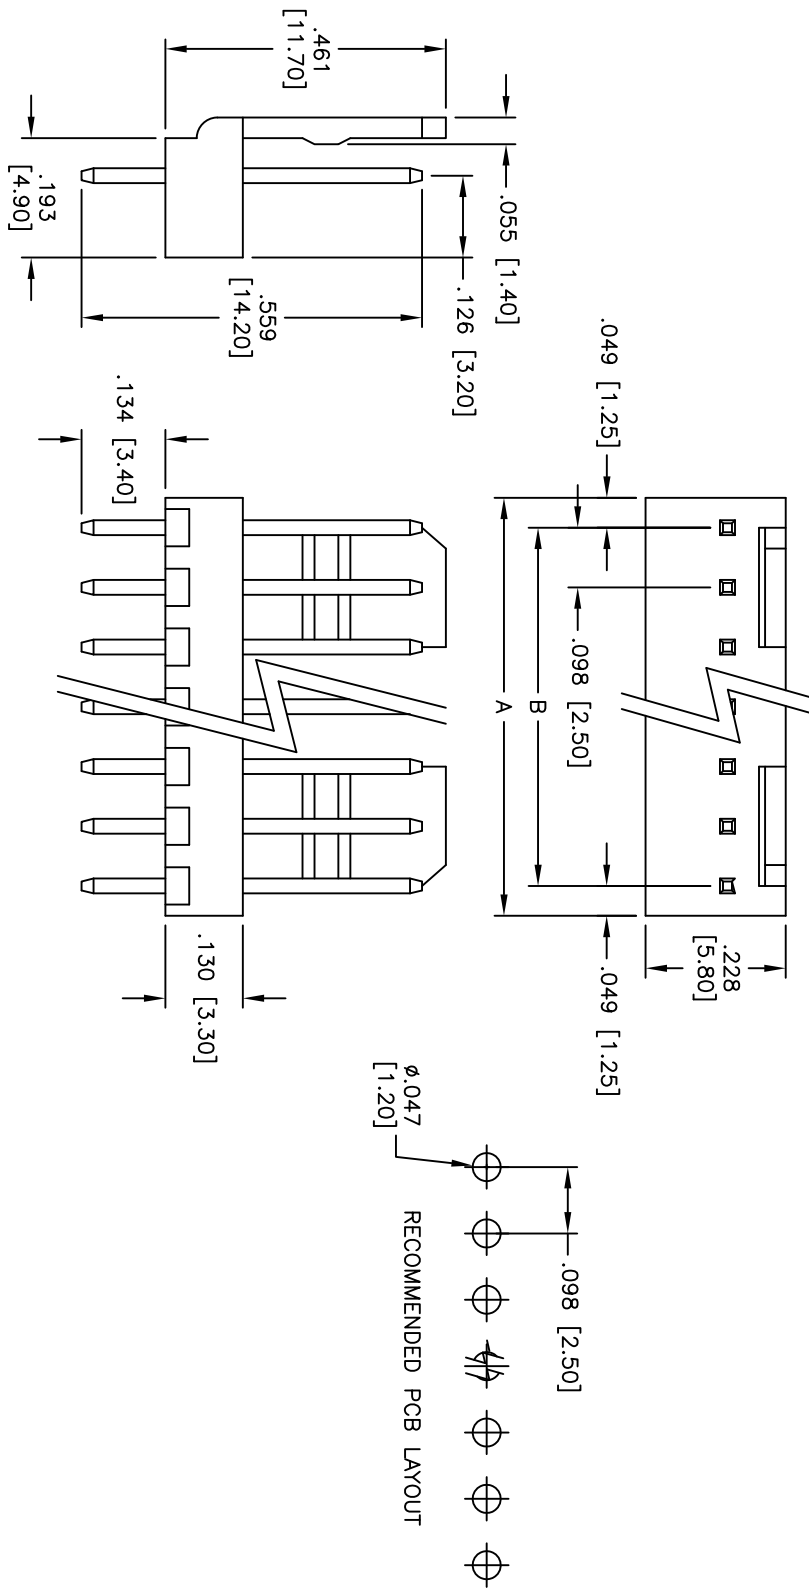

Positions: 2 thru 20  
 A = .098 [2.50] x No. of Positions  
 B = .098 [2.50] x No. of Spaces

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .098 [2.50] LOCKING HEADER  
 STRAIGHT, PCB, GOLD PLATED

**SPECIFICATIONS:**  
 Material: Nylon 66, rated UL 94V-0  
 Insulator color: White  
 Contacts: Brass  
 Plating: Gold flash over Nickel underplate overall  
 Electrical: Operating voltage: 250 VAC max  
 Current rating: 3 Amps max  
 Contact resistance: 20 mohms max  
 Dielectric withstanding voltage: 1,500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -40°C to +105°C  
 Environmental: Lead free, RoHS compliant  
 Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	11/25/10
CHECKED	
APPROVED	

SIZE X	PART NO. LHA-XX-GS-V0	REV. -
REF: S00123T	SCALE: NTS	SHEET 1 OF 1