

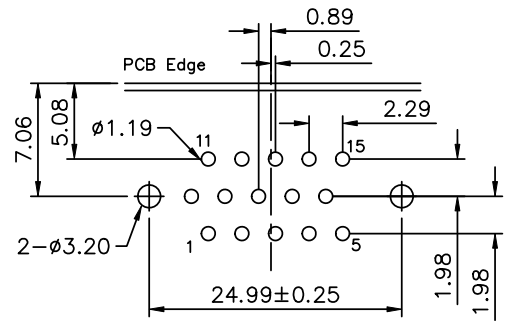
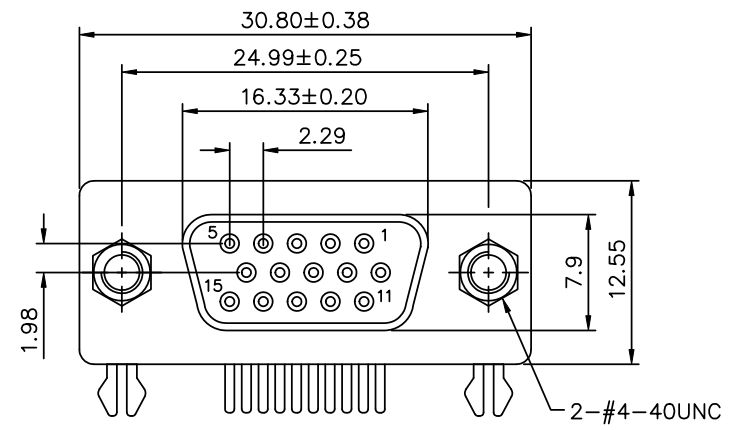


**SPECIFICATIONS**

Current Rating:2 Amp  
 Dielectric Withstanding Voltage:1000V AC For 1 Minute  
 Insulator Resistance:1000 Megohms Min. At 500V DC  
 Contact Resistance:15 Milliohms Max.  
 Operating Resistance:-55°C To +105°C  
 Insulator:PBT+30% Glass Fiber,UL 94V-0  
 Contact:Copper Alloy,Gold Over Nickel  
 Shell:Steel,Nickel Plated  
 Boardlock:Brass,Tin Plated  
 Riveted Insert:Brass,Nickel Plated  
 RoHS Compliant

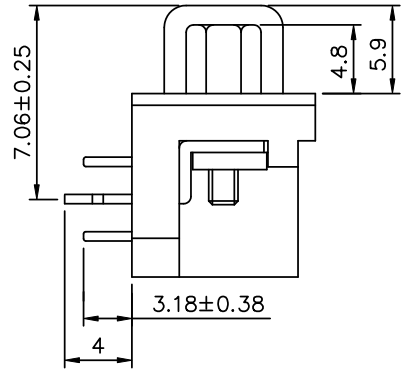

P.C.B. Layout

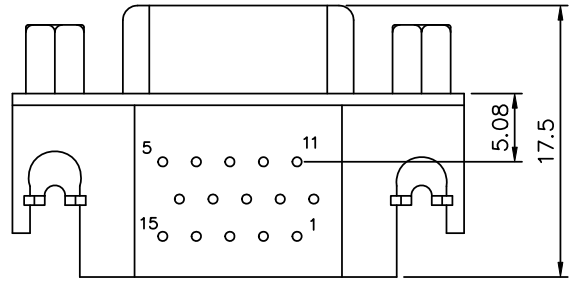

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 ANG. ±1°						
PART No. HDR50-15SNJ-H		MEI								
DRAWING No. HDR50-15SNJ-H		CHECKED BY BECKY								
		DRAWING BY HZF								
SCALE	NONE	REV.	A0	UNIT mm		NO. REV.	A0	NEW RELEASE	BECKY	05/24/2005
						REVISIONS		CHK		DATE