
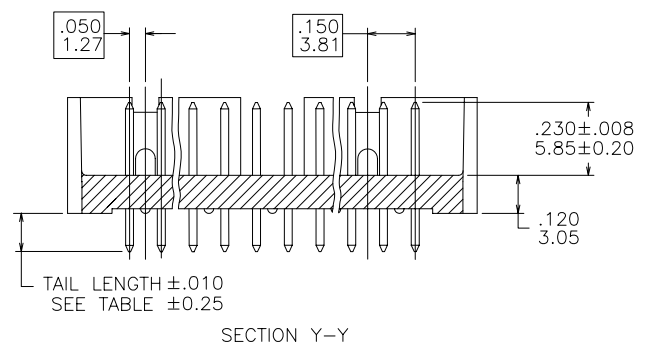
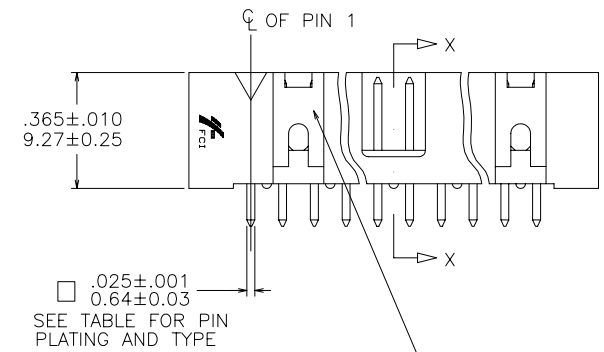


PRODUCT NO.

SEE TABLE

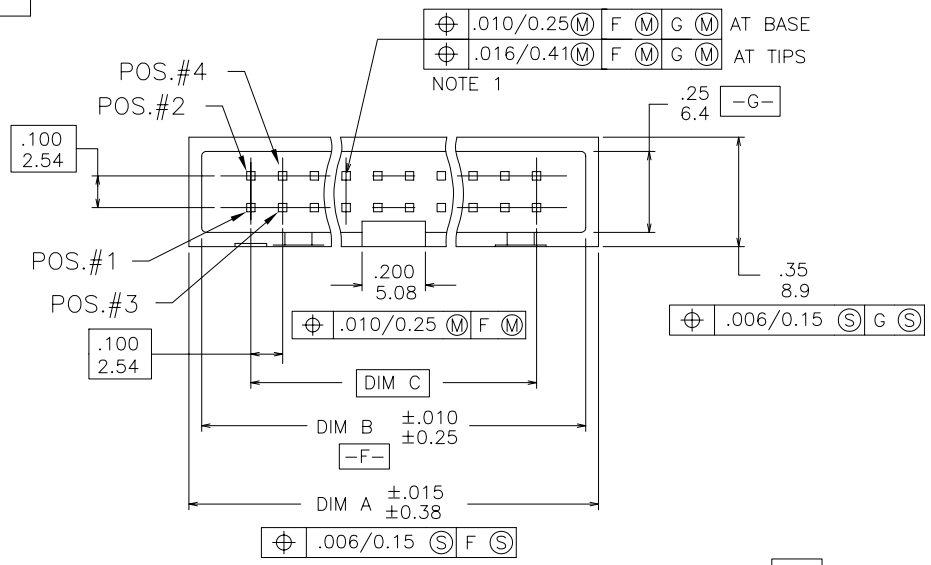

SEE SHEET 2 AND TABLES FOR POLARIZATION FEATURE ARRANGEMENT AND STYLE

CUSTOMER SPECIAL



FCIconnect.com

Copyright FCI

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection INCH/MM		product family HEADER	
ltr		ecn no		date		tolerances unless otherwise specified		title	
E	V81721	EPK	10/20/98	angles	linear	.XX±.01/.3	scale 1:1	HEADER, QUICKIE, SLIM LINE	
F	V82074	EPK	4/19/99			.xxx±.005/.13		VERTICAL ASS'Y, 4-WALL	
G	V91494	LSS	7/21/99	0'±2'		.xxx±.0020/.051			
H		V92898		MDF	11/30/99	dr	S. ROYER	9/5/97	dwg no
J		M05-0049		MHT	3/15/05	engr	L. FYE	9/5/97	sheet 1 of 3 size
K		M06-0289		AGS	7/29/06	chr	L. FYE	9/5/97	73658
L		M06-0306		AGS	7/10/06	appd	L. FYE	9/5/97	A3
sheet		revision		L		L		L	
index		sheet		1		2		3	

form: A3

PRODUCT NO	PLATING (13)	SIZE	HSG. STYLE	DIM A	DIM B	DIM C	TAIL LENGTH	OMITTED PIN	PLASTIC MAT'L COLOR
73658-001LF	15μ"/0.38μm GXT	2 X 5	A	.79/20.1	.71/18.0	.400/10.16	.120/3.05	NONE	PBT - BLACK
-002LF	OR	2 X 6	A	.89/22.6	.81/20.6	.500/12.70		8	
-003LF	15μ"/0.38μm Au	2 X 6	A	.89/22.6	.81/20.6	.500/12.70		6	
-004LF		2 X 7	C	.99/25.2	.91/23.1	.600/15.24		10	
-005LF		2 X 7	C	.99/25.2	.91/23.1	.600/15.24		NONE	
-006LF		2 X 7	C	.99/25.2	.91/23.1	.600/15.24		6	
-007LF		2 X 7	C	.99/25.2	.91/23.1	.600/15.24		14	
-008LF		2 X 8	D	1.09/27.7	1.010/25.65	.700/17.78		NONE	
-009LF		2 X 8	D	1.09/27.7	1.010/25.65	.700/17.78		9	
-010LF		2 X 8	D	1.09/27.7	1.010/25.65	.700/17.78		16	
-011LF		2 X 10	D	1.29/32.8	1.030/26.16	.900/22.86		NONE	
-012LF		2 X 10	D	1.29/32.8	1.030/26.16	.900/22.86		14	
-013LF		2 X 10	D	1.29/32.8	1.030/26.16	.900/22.86		20	
-014LF		2 X 12	D	1.49/37.8	1.050/26.67	1.10/27.94		14	
-015LF		2 X 13	D	1.59/40.4	1.060/26.92	1.20/30.48		NONE	
-016LF		2 X 13	D	1.59/40.4	1.060/26.92	1.20/30.48		9	
-017LF		2 X 14	D	1.69/42.9	1.070/27.18	1.30/33.02		14	
-018LF		2 X 15	D	1.79/45.47	1.71/43.43	1.400/35.56		16	
-019LF		2 X 17	D	1.99/50.6	1.91/48.0	1.600/40.64		NONE	
-020LF		2 X 17	D	1.99/50.6	1.91/48.0	1.600/40.64		3	
-021LF		2 X 17	D	1.99/50.6	1.91/48.0	1.600/40.64		20	
-022LF		2 X 17	D	1.99/50.6	1.91/48.0	1.600/40.64		30	
-023LF		2 X 18	D	2.09/53.1	2.01/51.1	1.700/43.18		NONE	
-024LF		2 X 20	D	2.29/58.0	2.21/56.0	1.900/48.26		NONE	
-025LF		2 X 20	D	2.29/58.0	2.21/56.0	1.900/48.26		20	
-026LF	15μ"/0.38μm GXT	2 X 20	D	2.29/58.0	2.21/56.0	1.900/48.26		21	
-027LF	OR	2 X 25	D	2.79/70.9	2.71/68.8	2.400/60.96		NONE	
73658-028LF	15μ"/0.38μm Au	2 X 25	D	2.79/70.9	2.71/68.8	2.400/60.96	.120/3.05	25	PBT - BLACK



FCJconnect.com

Copyright FCJ

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection ⊕		product family HEADER	
ltr		ecn no dr		date		tolerances unless otherwise specified		title	
L						.XX±.01/.3		HEADER, QUICKIE, SLIM LINE	
						linear .XXX±.005/.13		VERTICAL ASS'Y, 4-WALL	
				0'±2'		.XXXX±.0020/.051		scale 1:1	
				dr		S. ROYER 9/5/97		dwg no	
				enr		L. FYE 9/5/97		sheet 2 of 3 size	
				chr		L. FYE 9/5/97		73658 A3	
				appd		L. FYE 9/5/97		type Product Customer Drawing	
sheet index		revision sheet							



form: A3 1 2 3 4 5 6

PRODUCT NO	PLATING	SIZE	HSG. STYLE	DIM A	DIM B	DIM C	TAIL LENGTH	OMITTED PIN	PLASTIC MAT'L COLOR
73658-601LF	15μ"/0.38μm GXT OR 15μ"/0.38μm Au	2 X 5	A	.79/20.1	.71/18.0	.400/10.16	.120/3.05	6	PBT - BLUE
-602LF		2 X 6	A	.89/22.6	.81/20.6	.500/12.70		8	PBT - BLUE
-603LF		2 X 7	C	.99/25.2	.91/23.1	.600/15.24		6	PBT - BLUE
-604LF		2 X 8	D	1.09/27.7	1.010/25.65	.700/17.78		9	PBT - BLACK
-609LF		2 X 5	A	.79/20.1	.71/18.0	.400/10.16		10	
-627LF		2 X 14	D	1.69/42.9	1.61/40.9	1.300/33.02		14	
-633LF		2 X 17	D	1.99/50.6	1.91/48.0	1.600/40.64		5	
-634LF		2 X 17	D	1.99/50.6	1.91/48.0	1.600/40.64		30	
-637LF		2 X 20	D	2.29/58.0	2.21/56.0	1.900/48.26		25,27,28	
-639LF		2 X 20	D	2.29/58.0	2.21/56.0	1.900/48.26		20	
-649LF		2 X 25	D	2.79/70.9	2.71/68.8	2.400/60.96		25	
-650LF		2 X 7	C	.99/25.2	.91/23.1	.600/15.24		14	
73658-651LF			2 X 15	D	1.79/45.5	1.71/43.4	1.400/35.56	.120/3.05	16

NOTE 9

NOTES:

1. SAME POSITION TOLERANCE APPLIES TO BOTH ENDS OF PINS.
2. MOLDING MATERIAL : PBT PER UL94V0. COLOR - SEE TABLE
3. 1° MAX DRAFT PERMISSIBLE ON ALL SURFACES.
4. 4 LBS / 1.8 KG MIN TERMINAL PULL-OUT FORCE.
5. PIN MATERIAL: PHOS-BRONZE
6. PACKAGING: STANDARD TRAY
7. PART NUMBERS FOLLOWED BY "T" ARE PACKAGED IN TUBES (EXAMPLE - 73658-601T) CALL PRODUCT MANAGER FOR AVAILABILITY.
8. PART NUMBERS FOLLOWED BY "R" HAVE RETENTION. (EXAMPLE - 73658-601R) LOCATION IS MANUFACTURING OPTION.
9. "PT" AFTER DASH NUMBER IS FOR PLASTIC TRAYS.
10. LF SUFFIX AT THE END OF PART NUMBER IS LEAD FREE.
11. THE HOUSING WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE FOR 15 SECOND IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
12. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
13. PLATING OPTIONS: MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.



Copyright FCI

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection ⊕		product family HEADER	
ltr		ecn no		dr		date		tolerances unless otherwise specified	
L								.XX±.01/.3	
								linear .xxx±.005/.13	
								INCH/MM	
								scale 1:1	
								dwg no	
								sheet 3 of 3 size	
								73658 A3	
								type Product Customer Drawing	
sheet index		revision sheet							