
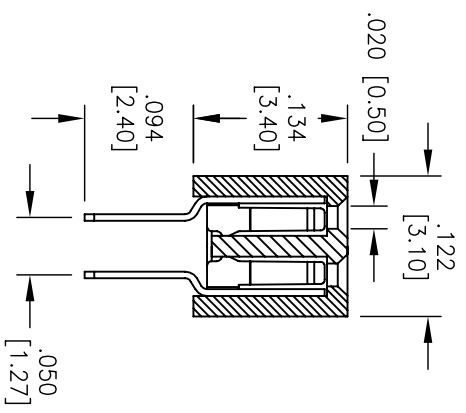
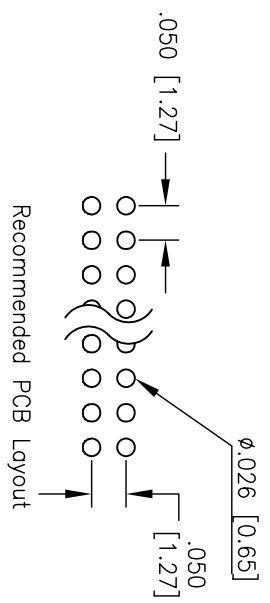
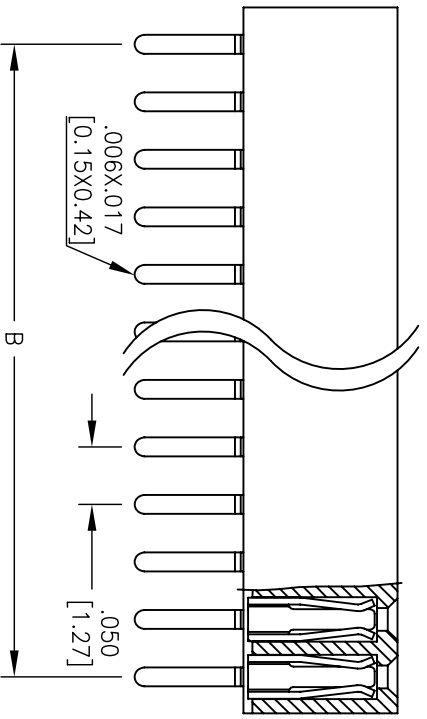


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/17/08	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

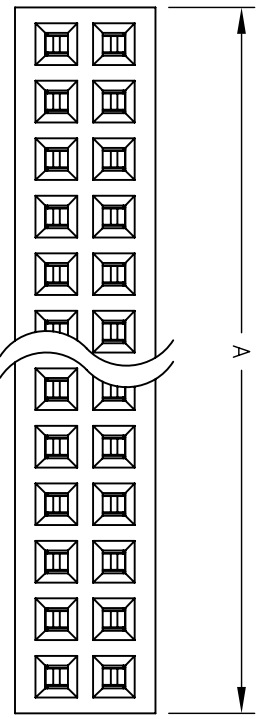

A = .050 [1.27] X No. of Positions + .014 [0.35]  
 B = .050 [1.27] X No. of Spaces

**SPECIFICATIONS:**

- Material: Insulator: PBT, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate on contact area, Gold Flash over nickel underplate on contact area, Tin over Copper underplate on tails
- Electrical:
  - Operating voltage: 250 VAC max
  - Current rating: 1 Amp max
  - Contact resistance: 20 mohms max
  - Insulation resistance: 5000 Mohms min @ 500 VDC
  - Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating:
  - Operating temperature: -40°C to +105°C
- Environmental:
  - Lead free, RoHS compliant.
  - Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
X ± .10	ØX ± .10
.XX ± .020	± .015
XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	7/17/08
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" RECEPTACLE STRIP, DUAL ROW,  
 .134" INSULATOR HEIGHT, SEL GOLD PLATED

SIZE	PART NO.	REV.
X	HRS-2E-XX-SG	-
REF:	SCALE: NTS	SHEET 1 OF 1