


2.0mm (.079") Pitch Housing

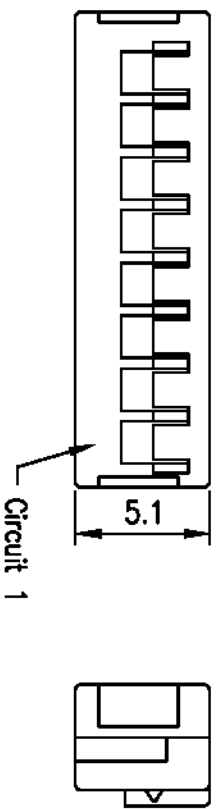

Features:

- * Available in 2 through 15 Circuits
- * Material: Nylon66 UL94V-0
- * Accepts YY-1140-T Crimp Terminal
- * Mates with YY-1140-WXXS or YY-1140-WXXR Series Wafer

Specifications:



- * Pitch between Poles 2.00mm
- * Rated Voltage 100V AC,DC
- * Rated Current 2A
- * Withstand Voltage 800V AC/minute
- * Insulation Resistance 1,000M Ohms/Min
- * Temperature Range -25°C~+85°C

Circuits	Part No	Dimension mm		
		A	B	C
2	YY-1140-H02	2.00	4.80	6.00
3	YY-1140-H03	4.00	6.80	8.00
4	YY-1140-H04	6.00	8.80	10.00
5	YY-1140-H05	8.00	10.80	12.00
6	YY-1140-H06	10.00	12.80	14.00
7	YY-1140-H07	12.00	14.80	16.00
8	YY-1140-H08	14.00	16.80	18.00
9	YY-1140-H09	16.00	18.80	20.00
10	YY-1140-H10	18.00	20.80	22.00
11	YY-1140-H11	20.00	22.80	24.00
12	YY-1140-H12	22.00	24.80	26.00
13	YY-1140-H13	24.00	26.80	28.00
14	YY-1140-H14	26.00	28.80	30.00
15	YY-1140-H15	28.00	30.80	32.00

EDITION	DATE	MODIFY	VIEW	DRAW BY	AUDITING	APPROVAL	DATE	DWG NO	TOLERANCE
A0	2002.04.24	DRAWING		Tomeng Sun	Jeff	Jessica	2005.01.19	YY-1140-HXX	.00 ±0.15
A1	2005.01.19	CHANGE							.000 ±0.08

YOUNG YAK ENTERPRISE CO.,LTD.
 毅耀實業股份有限公司
 TEL:886-2-2999-9629
 FAX:886-2-2999-0575

2.0mm (.079") Pitch Wafer

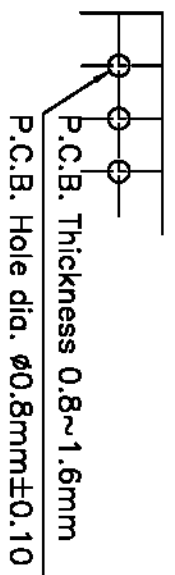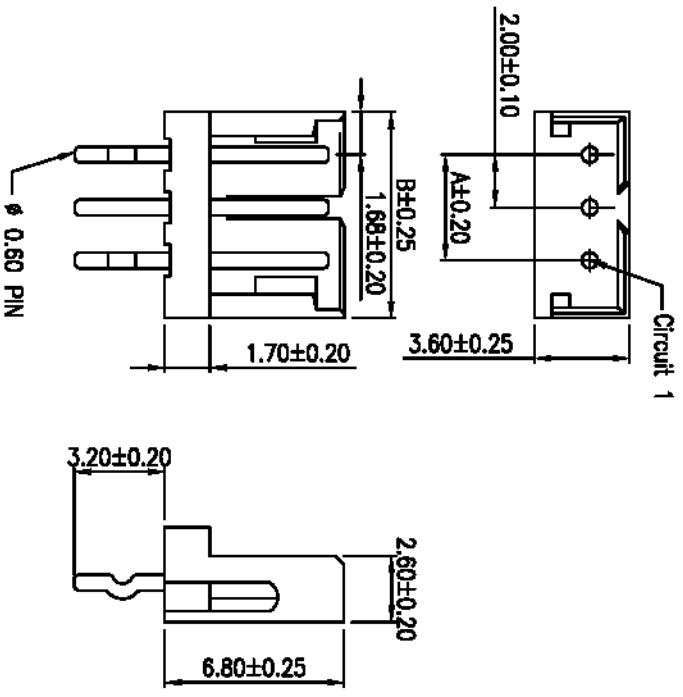

P.C.B LAYOUT



Features:

- * Available in 2 through 12 Circuits
- * Material: Nylon 66 UL94-V0
- * Mates with YY-1140-H Series Housing
- * 0.6mm(.024") Round Pin
- * Pin Material: Brass/Tin-Plated

Ordering information:

YY-1140-WXXSX
 PIN:02~12
 S: Straight
 T: Tin
 G: Gold

Specifications:

- * Pitch Between Poles: 2.0mm
- * Rated Voltage: 100V AC,DC
- * Rated Current: 2A
- * Withstand Voltage: 800V AC/minute
- * Insulation Resistance: 1,000M Ohms/Min
- * Temperature Range: -25°C~+85°C





Circuits	Part No	Dimension mm	
		A	B
2	YY-1140-W02S	2.00	5.96
3	YY-1140-W03S	4.00	7.96
4	YY-1140-W04S	6.00	9.96
5	YY-1140-W05S	8.00	11.96
6	YY-1140-W06S	10.00	13.96
7	YY-1140-W07S	12.00	15.96
8	YY-1140-W08S	14.00	17.96

Circuits	Part No	Dimension mm	
		A	B
9	YY-1140-W09S	16.00	19.96
10	YY-1140-W10S	18.00	21.96
11	YY-1140-W11S	20.00	23.96
12	YY-1140-W12S	22.00	25.96

EDITION	DATE	MODIFY	VIEW	DRAW BY	AUDITING	APPROVAL	DATE	DWG NO	A2007WS	TOLERANCE
A0	2005.02.02	DRAWING		Andy He	JEFF	Jessica	2005.02.02	YY-1140-WXXSX	152-A0	.00 ±0.15
										.000 ±0.08

YOUNG YAK ENTERPRISE CO.,LTD.
 毅耀實業股份有限公司
 TEL:886-2-2999-9629
 FAX:886-2-2999-0575

2.0mm (.079") Pitch Wafer

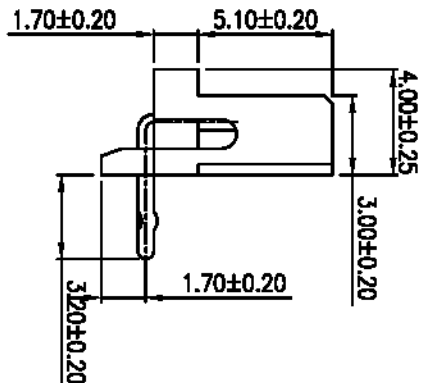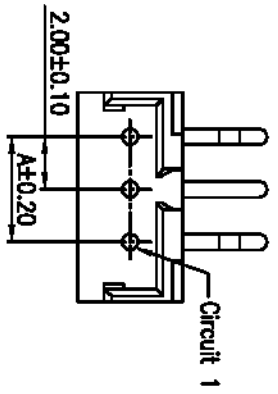

P.C.B LAYOUT



Ordering information:

YY-1140-WXXRX

PIN:02~12
R:Right angle
T:Tin
G:Gold

Specifications:

- * Pitch Between Poles 2.0mm
- * Rated Voltage 100V AC/DC
- * Rated Current 2A
- * Withstand Voltage 800V AC/minute
- * Insulation Resistance 1,000M Ohms/Min
- * Temperature Range -25°C~+85°C

Circuits	Part No	Dimension mm	
		A	B
2	YY-1140-W02R	2.00	5.96
3	YY-1140-W03R	4.00	7.96
4	YY-1140-W04R	6.00	9.96
5	YY-1140-W05R	8.00	11.96
6	YY-1140-W06R	10.00	13.96
7	YY-1140-W07R	12.00	15.96
8	YY-1140-W08R	14.00	17.96

Circuits	Part No	Dimension mm	
		A	B
9	YY-1140-W09R	16.00	19.96
10	YY-1140-W10R	18.00	21.96
11	YY-1140-W11R	20.00	23.96
12	YY-1140-W12R	22.00	25.96

EDITION	DATE	MODIFY	VIEW	<p>毅耀實業股份有限公司 YOUNG YAK ENTERPRISE CO.,LTD. TEL:886-2-2999-9629 FAX:886-2-2999-0575</p>	DRAW BY	AUDITING	APPROVAL	DATE	DWG NO	A2007WR 152-A0	TOLERANCE
A0	2002.04.24	DRAWING			Andy He	JEFF	Jessica	2002.04.24	YY-1140-WXXRX	.00 ±0.15 ±0.25	.000 ±0.08

