

2.54mm (0.1") Pin Housing

TH Series


FEATURES

2-20 Circuits
 Post: Brass, Copper-Undercoated,
 Tin/Lead-Plated
 Wafer: Nylon, UL 94V-0

SPECIFICATIONS


Current Rating: 3A AC DC
 Voltage Rating: 250V AC Maximum
 Temperature Range: -25°C~+90°C
 Contact Resistance: Initial Value/10 m ohm max
 After Environmental Testing
 /20 m ohm min
 Insulation Resistance: 1000 M ohm min
 Withstand Voltage: 1500V AC/minute
 P.C.Board Thickness: 1.6mm(.063")

Contact

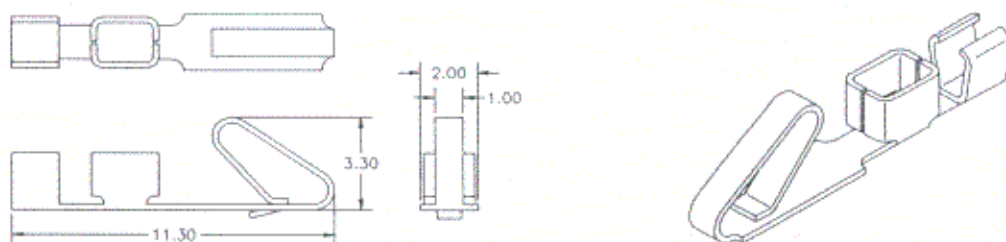

Model No.	Applicable Wire			Material	Finish
	mm ²	AWG #	Insulation O.D.		
TH-C-0	0.2 to 0.08	24 to 28	1.5 to 1.0	Brass	Tin-Plated

Housing

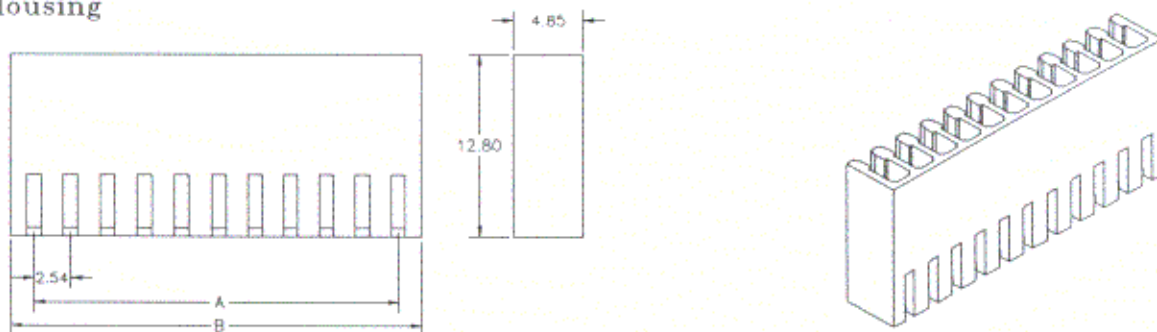

Circuits	Model No.	Dimension mm	
		A	B
2	TH-H-2	2.54	5.60
3	TH-H-3	5.08	8.14
4	TH-H-4	7.62	10.68
5	TH-H-5	10.16	13.22
6	TH-H-6	12.70	15.76
7	TH-H-7	15.24	18.30
8	TH-H-8	17.78	20.84
9	TH-H-9	20.32	23.38
10	TH-H-10	22.86	25.92
11	TH-H-11	25.40	28.46

Circuits	Model No.	Dimension mm	
		A	B
12	TH-H-12	27.94	31.00
13	TH-H-13	30.48	33.54
14	TH-H-14	33.02	36.08
15	TH-H-15	35.56	38.62
16	TH-H-16	38.10	41.16
17	TH-H-17	40.64	43.70
18	TH-H-18	43.18	46.24
19	TH-H-19	45.72	48.78
20	TH-H-20	48.26	51.32

SINGATRON ENT. CO., LTD. Tel.: (909) 464-1883 Fax.: (909) 464-1884