


KS823C09 (5A)



SCHOTTKY BARRIER DIODE

■ Outline Drawing

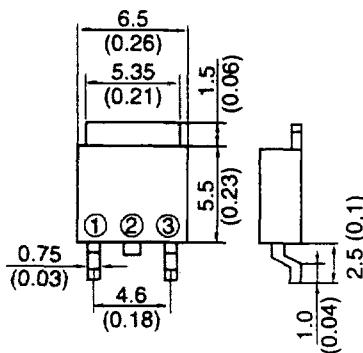


■ Features

- Surface mount device
- Low V_F
- Super high speed switching
- High reliability by planer design

■ Applications

- High speed power switching

■ Connection Diagram

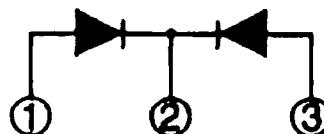

■ Maximum Ratings & Characteristics

• Absolute Maximum Ratings

Items	Symbols	Conditions	Ratings	Units
Repetitive Peak Reverse Voltage	V_{RRM}		90	V
Non-Repetitive Peak Reverse Voltage	V_{RSM}	$t_w = 500\text{ns}$, duty 1/40	100	V
Average Output Current	I_o	$T_a = 73^\circ\text{C}$	5 *	A
Surge Current	I_{FSM}	Sine Wave, 10ms	60	A
Operating Junction Temperature	T_j		-40 to +125	$^\circ\text{C}$
Storage Temperature	T_{stg}		-40 to +125	$^\circ\text{C}$

*Output current of centertap full wave connection.

• Electrical Characteristics ($T_a = 25^\circ\text{C}$ Unless otherwise specified)

Items	Symbols	Conditions	Ratings	Units
Forward Voltage Drop	V_F	$I_F = 2\text{A}$	0.9	V
Reverse Current	I_R	$V_R = V_{RRM}$	5	mA
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	10	$^\circ\text{C}/\text{W}$