


## High Current Density Surface Mount Dual Common-Cathode Schottky Rectifiers



### FEATURES

- Very low profile - typical height of 1.1 mm
- Ideal for automated placement
- Low forward voltage drop, low power losses
- High efficiency
- Low thermal resistance
- **“Green” molding compound (GMC)**
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

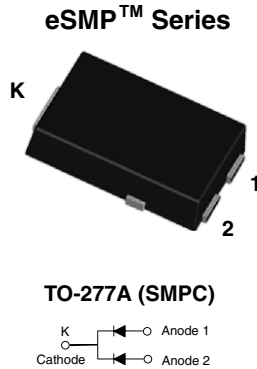

RoHS  
COMPLIANT

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	2 x 5 A
$V_{RRM}$	20 V, 30 V
$I_{FSM}$	200 A
$E_{AS}$	20 mJ
$V_F$ at $I_F = 5$ A	0.338 V
$T_J$ max.	150 °C

### TYPICAL APPLICATIONS

For use in high frequency rectifier of switching mode power supplies, freewheeling diodes, dc-to-dc converters and polarity protection applications.

#### Note:

- There is no industry standard for definition of HF, or GMC for components.

### MECHANICAL DATA

Case: TO-277A (SMPC)

Molding compound meets UL 94V-0 flammability rating.

“G” vs. “E” suffix defines molding as none green, “E”, or green molding compound (GMC) “G”.

“G” is defined as halogen-free (HF) and antimony-free molding compound.

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 and G3 suffix for consumer grade, meets JESD 201 class 1A whisker test, HE3 and HG3 suffix for high reliability grade (AEC Q101 qualified), meets JESD 201 class 2 whisker test

MAXIMUM RATINGS ( $T_A = 25$ °C unless otherwise noted)				
PARAMETER	SYMBOL	SS10P2CL	SS10P3CL	UNIT
Device marking code		S102CL	S103CL	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	V
Maximum average forward rectified current (Fig. 1) total device per diode	$I_{F(AV)}$	10 5.0		A
Peak forward surge current 10 ms single half sine-wave superimposed on rated load per diode	$I_{FSM}$	200		A
Non-repetitive avalanche energy at 25 °C, $I_{AS} = 2$ A per diode	$E_{AS}$	20		mJ
Operating junction and storage temperature range	$T_J, T_{STG}$	- 55 to + 150		°C



ELECTRICAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted)						
PARAMETER	TEST CONDITIONS		SYMBOL	TYP.	MAX.	UNIT
Instantaneous forward voltage per diode <sup>(1)</sup>	I <sub>F</sub> = 2.5 A	T <sub>A</sub> = 25 °C	V <sub>F</sub>	0.391	-	V
	I <sub>F</sub> = 5.0 A			0.440	0.52	
	I <sub>F</sub> = 2.5 A	T <sub>A</sub> = 125 °C		0.272	-	
	I <sub>F</sub> = 5.0 A			0.338	0.42	
Reverse current per diode <sup>(2)</sup>	rated V <sub>R</sub>	T <sub>A</sub> = 25 °C	I <sub>R</sub>	95	850	μA mA
		T <sub>A</sub> = 125 °C		37	55	
Typical junction capacitance per diode	4.0 V, 1 MHz		C <sub>J</sub>	560	-	pF

**Notes:**

(1) Pulse test: 300 μs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width ≤ 40 ms

THERMAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted)				
PARAMETER	SYMBOL	SS10P2CL	SS10P3CL	UNIT
Typical thermal resistance per diode	R <sub>θJA</sub> <sup>(1)</sup>	60		°C/W
	R <sub>θJL</sub>	3		

**Note:**

(1) Units mounted on recommended P.C.B. 1 oz. pad layout

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
SS10P3CL-E3/86A	0.10	86A	1500	7" diameter plastic tape and reel
SS10P3CL-E3/87A	0.10	87A	6500	13" diameter plastic tape and reel
SS10P3CLHE3/86A <sup>(1)</sup>	0.10	86A	1500	7" diameter plastic tape and reel
SS10P3CLHE3/87A <sup>(1)</sup>	0.10	87A	6500	13" diameter plastic tape and reel
SS10P3CL-G3/86A	0.10	86A	1500	7" diameter plastic tape and reel
SS10P3CL-G3/87A	0.10	87A	6500	13" diameter plastic tape and reel
SS10P3CLHG3/86A <sup>(1)</sup>	0.10	86A	1500	7" diameter plastic tape and reel
SS10P3CLHG3/87A <sup>(1)</sup>	0.10	87A	6500	13" diameter plastic tape and reel

**Note:**

(1) Automotive grade AEC Q101 qualified

**RATINGS AND CHARACTERISTICS CURVES**

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

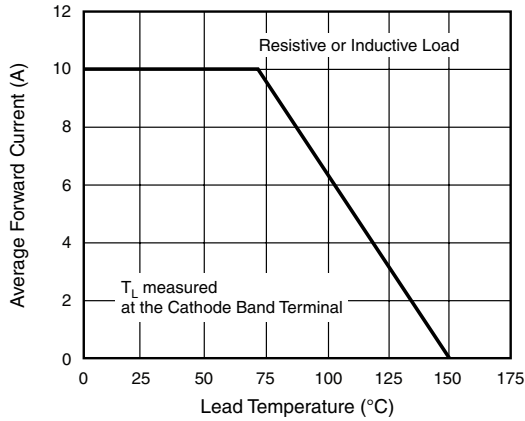


Figure 1. Maximum Forward Current Derating Curve

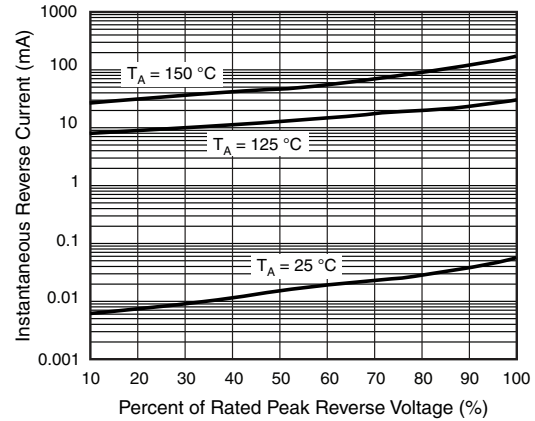


Figure 4. Typical Reverse Leakage Characteristics Per Diode

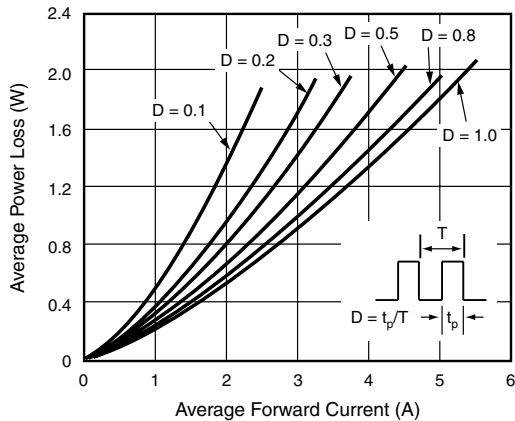


Figure 2. Forward Power Loss Characteristics Per Diode

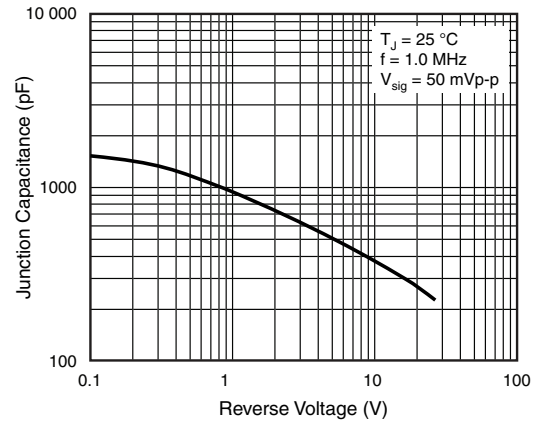


Figure 5. Typical Junction Capacitance Per Diode

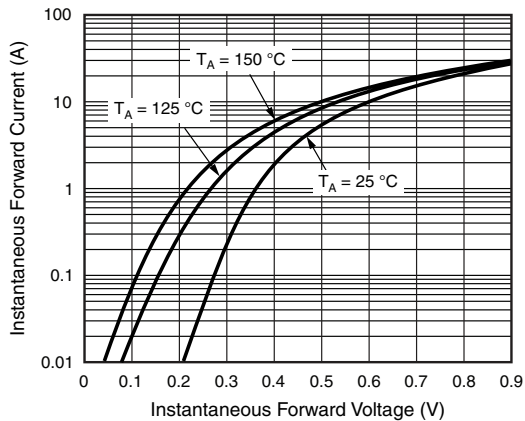


Figure 3. Typical Instantaneous Forward Characteristics Per Diode

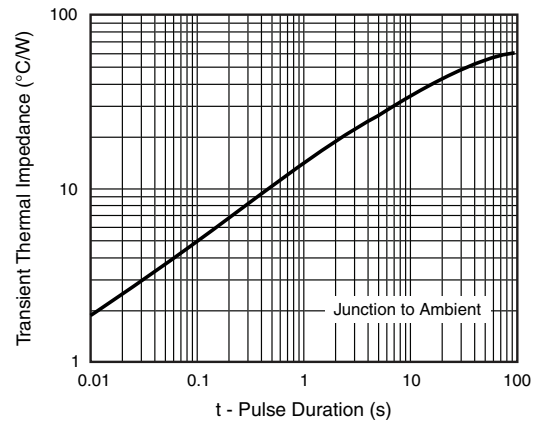



Figure 6. Typical Transient Thermal Impedance Per Diode

# SS10P2CL & SS10P3CL

Vishay General Semiconductor



## PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

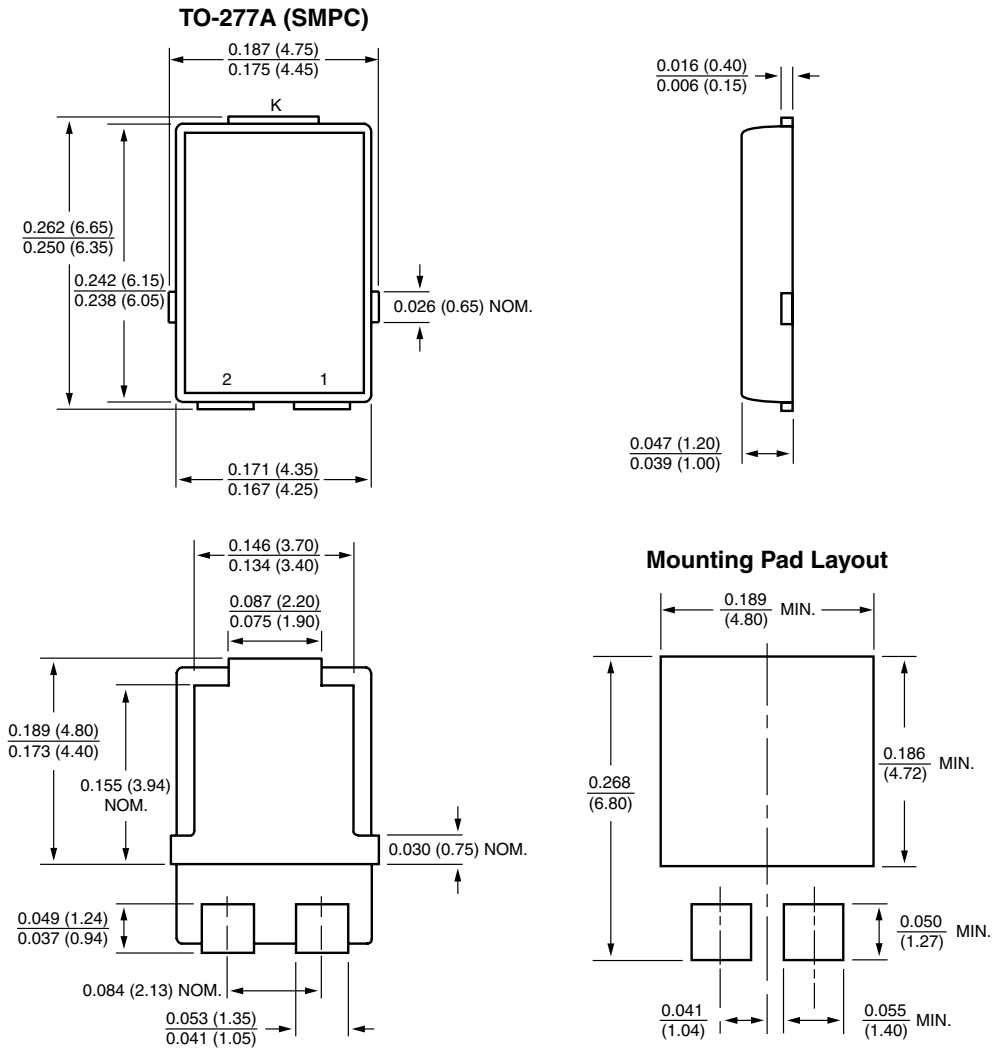

Conform to JEDEC TO-277A



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.