
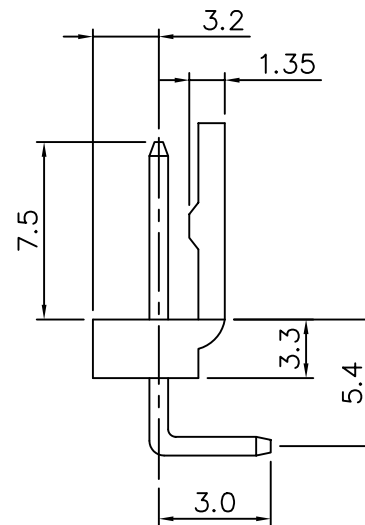
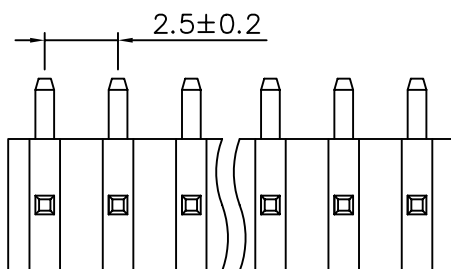


SPECIFICATIONS

Current Rating: 3A AC, DC
 Voltage Rating: 250V AC, DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1000Megohms Min.
 Contact Resistance: Initial Value/10 Milliohms Min.
 After Environmental Testing/20 Milliohms Max.

Temperature Range: -25°C To +85°C
 Applicable PC Board Thickness: 1.6mm
 Post Material: Brass Tin Plated
 Base Material: Nylon 66 UL94V-2
 Q'ty: 500, 1000 Pcs/Bag

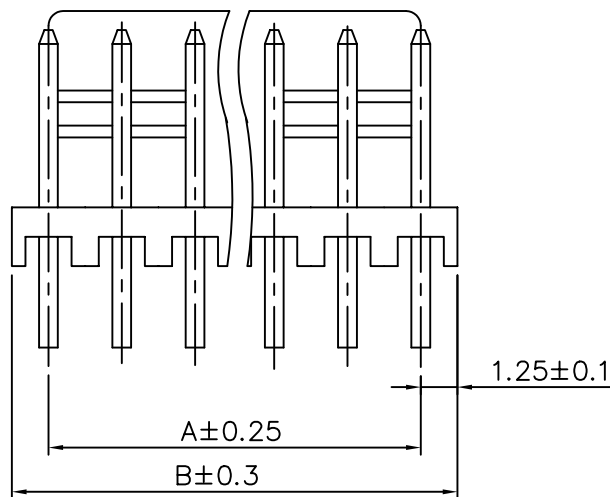

Poles	A	B
2	2.5	5.0
3	5.0	7.5
4	7.5	10.0
5	10.0	12.5
6	12.5	15.0
7	15.0	17.5
8	17.5	20.0
9	20.0	22.5
10	22.5	25.0
11	25.0	27.5
12	27.5	30.0
13	30.0	32.5
14	32.5	35.0
15	35.0	37.5



A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX
PART No.		CHECKED BY		
DRAWING No.		DRAWING BY		
SCALE	NONE	REV.	A	
				UNIT
				mm

AREA	REVISIONS	CHK	DATE