


PIN HEADER 2,00 mm

ID: 151


STL 12-XXXX / STL 22-XXXX

Series 500

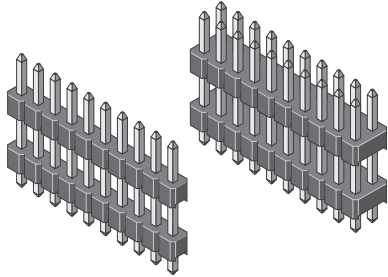

TECHNICAL DATA

Pitch	2,00 mm
Insulating Material	high temp. thermoplast UL94V-0
Contact Material	copper alloy
Rated Current	1,5 Amp.
Rated Voltage	100 V _{RMS} /150 V _{DC}
Withstanding Voltage	500 V _{AC} for one minute
Operating Temperature	-40°C to +105°C
Maximum Soldering Temperature	260°C for 10 seconds

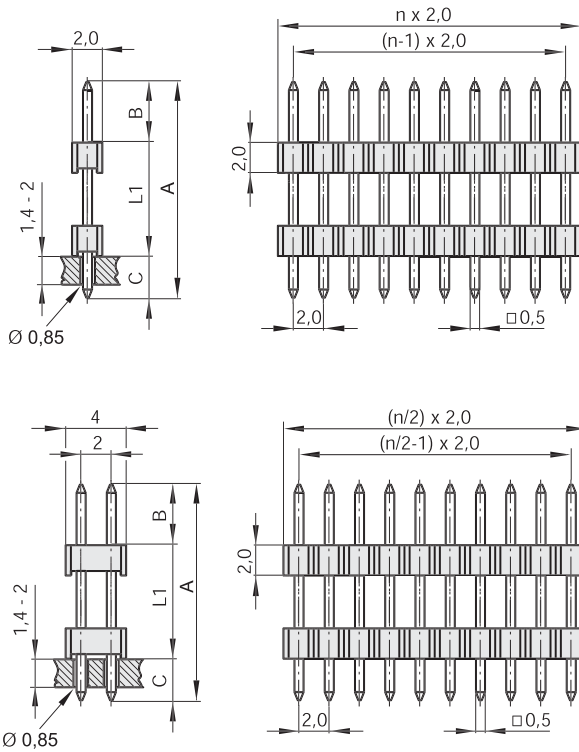

Code	A	B	C	L1
1450	14,50	2,50	4,00	8,00
1685	16,85	2,40	2,45	12,00
2050	20,50	4,00	2,50	14,00
custom	_____	_____	_____	_____

All dimensions in mm.
Other dimensions upon request.

STL XX - XXXX - D XX - XX U

XX: 12 = 1 row, pitch 2,00mm
22 = 2 rows, pitch 2,00mm

Code: see table

D: sandwich

Plating: TT = Sn
GT = sel. Au
GG = Au

U: RoHS-compliant with high temp. plastic

Poles: 1 row: 2 - 40 contacts possible
2 rows: 4 - 80 contacts possible

8 | 2,00 mm