

Kingbright Electronic Co., Ltd.




Mail Address : P. O. Box 81-153 Taipei, Taiwan
 Telex No. : 22249 TWNKIN

Cable Address: "TWNKIN" Taipei
 Telephones : 715-2848 • 713-0682

1x5mm RECTANGULAR LED LAMP

L-222

Unit: mm
 Tolerance: ±0.2

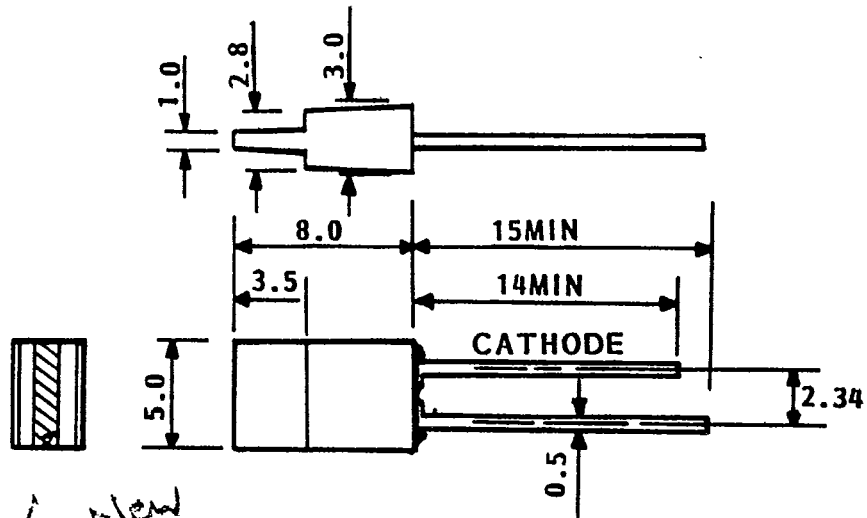

SELECTION GUIDE

PART NO.	SOURCE (DICE)	LENSE TYPE (RESIN)	AXIAL LUMINOUS INTENSITY IN MCD @ 20mA		VIEWING ANGLE
			MIN	TYP	
✓ L-222RD	RED (GaAsP)	Red Diffused	0.4	0.8	100°
✓ L-222RDT		Red Top Diffused	0.5	1.0	100°
✓ L-222HD	HIGH EFFICIENCY RED (GaP)	Red Diffused	0.8	1.2	100°
✓ L-222HDT		Red Top Diffused	1.0	1.4	100°
✓ L-222GD	GREEN (GaP)	Green Diffused	0.8	1.0	100°
✓ L-222GDT		Green Top Diff.	0.9	1.2	100°
✓ L-222YD	YELLOW (GaAsP/GaP)	Yellow Diffused	1.0	1.3	100°
✓ L-222YDT		Yellow Top Diff.	1.1	1.5	100°
✓ L-222ED	ORANGE (GaAsP/GaP)	Orange Diffused	1.2	1.6	100°
✓ L-222EDT		Orange Top Diff.	1.4	2.0	100°