




CFD03 1.27mm FEMALE HEADER, SIDE ENTRY TYPE

Pitch: 1.27mm x 1.27mm

SPECIFICATION

Current Rating: 1.5 Amp
 Insulation Resistance: 2000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -40 ° C to +105° C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0
 © Standard : NYLON-6T or LCP

RoHS compliant

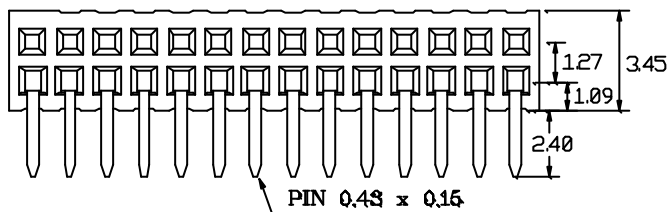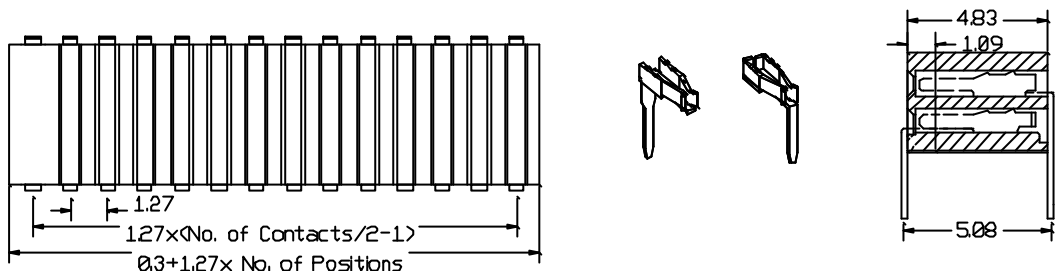

Recommended P.C. Board Hole Layout

HOW TO ORDER

CFD03 - [X] - [X] - [X]

NO. OF CONTACT
 04 TO 100 Contacts

CONTACT PLATING
 A : Gold Flash
 B : 10u" Gold
 C : 15u" Gold
 D : 30u" Gold
 © Standard: A

CODE PACKING
 A: Tube