



SANYO Semiconductors

DATA SHEET

2SA1654/2SC4361

PNP/NPN Epitaxial Planar Silicon Transistors
Switching Applications
 (with Bias Resistance)

Applications

- Switching circuit, inverter circuit, interface circuit, driver circuit

Features

- On-chip bias resistance (R1 = 4.7kΩ, R2 = 10kΩ)

() : 2SA1654


Absolute Maximum Ratings at Ta = 25°C

			unit
Collector to Base Voltage	V _{CB0}	(-) 50	V
Collector to Emitter Voltage	V _{CE0}	(-) 50	V
Emitter to Base Voltage	V _{EB0}	(-) 6	V
Collector Current	I _C	(-) 100	mA
Collector Current (Pulse)	I _{CP}	(-) 200	mA
Collector Dissipation	P _C	300	mW
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-55 to +150	°C


Electrical Characteristics at Ta = 25°C

			min	typ	max	unit
Collector Cutoff Current	I _{CB0}	V _{CB} = (-)40V, I _E = 0			(-) 0.1	μA
Collector Cutoff Current	I _{CE0}	V _{CE} = (-)40V, I _B = 0			(-) 0.5	μA
Emitter Cutoff Current	I _{EB0}	V _{EB} = (-)5V, I _C = 0	(-) 262	(-) 340	(-) 485	μA
DC Current Gain	h _{FE}	V _{CE} = (-)5V, I _C = (-)10mA	50			
Gain-Bandwidth Product	f _T	V _{CE} = (-)10V, I _C = (-)5mA		250		MHz
				(200)		MHz
Output Capacitance	c _{ob}	V _{CE} = (-)10V, f = 1MHz		3.7		pF
				(5.5)		pF
C-E Saturation Voltage	V _{CE(sat)}	I _C = (-)10mA, I _B = (-)0.5mA		(-) 0.1	(-) 0.3	V
C-B Breakdown Voltage	V _{(BR)CBO}	I _C = (-)10μA, I _E = 0	(-) 50			V
C-E Breakdown Voltage	V _{(BR)CEO}	I _C = (-)100μA, R _{BE} = ∞	(-) 50			V
Input OFF-State Voltage	V _{I(off)}	V _{CE} = (-)5V, I _C = (-)100μA	(-) 0.7	(-) 0.85	(-) 0.95	V
Input ON-State Voltage	V _{I(on)}	V _{CE} = (-)0.2V, I _C = (-)10mA	(-) 0.95	(-) 1.3	(-) 2.0	V
Input Resistance	R1		3.3	4.7	6.1	kΩ
Resistance Ratio	R1/R2			0.47		

Electrical Connection

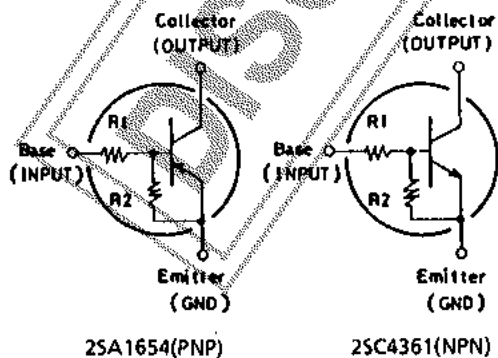

Case Outline 2033
 (unit : mm)




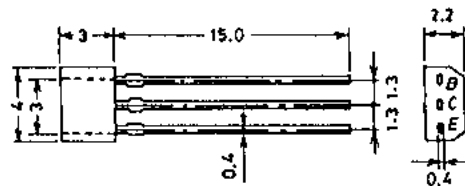


B: Base
 C: Collector
 E: Emitter
 SANYO: SPA

Specifications and information herein are subject to change without notice.

SANYO Electric Co., Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

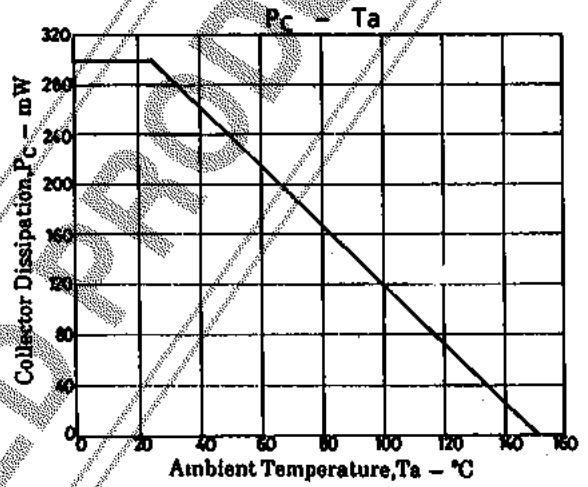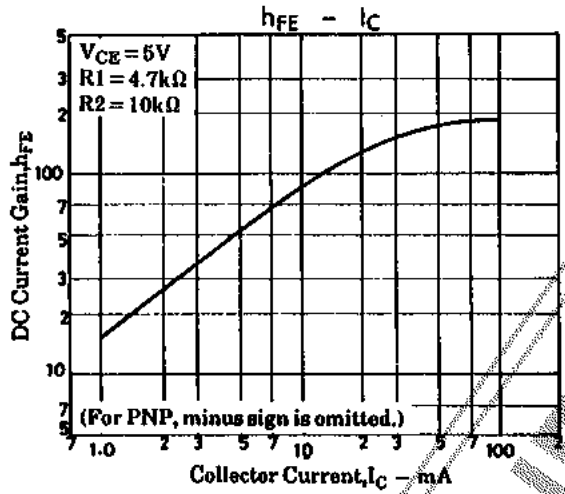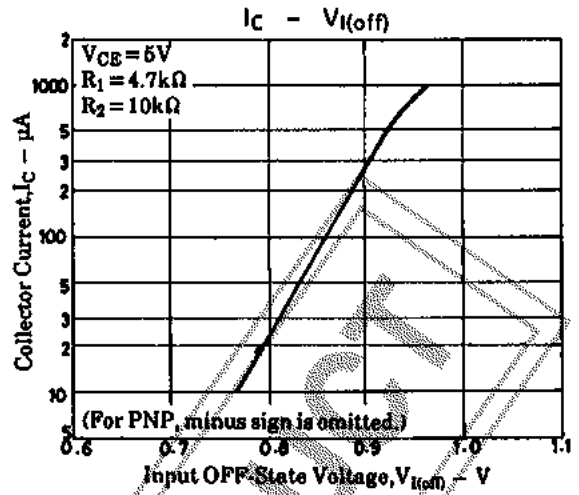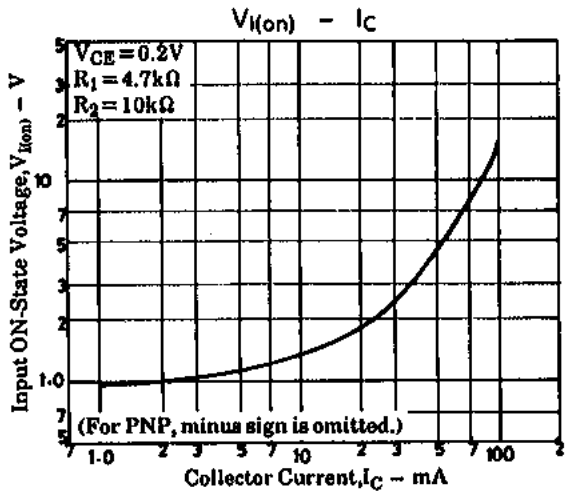

DISCONTINUED