

# 1.27mm (0.05") Dual Body Pin Header (Single Row)




0204S Series

## APPLICATION AND FEATURES


1. 0204S series headers are ideal for board stacking application.

## SPECIFICATIONS

Current Rating: 1 Amp  
 Insulator resistance: 5000 Megohms min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40° to +105°C  
 Max Processing Temp: 230° for 30~60 seconds  
 (260° for 10 seconds)  
 Contact Material: Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0  
 © Standard: Nylon-6T

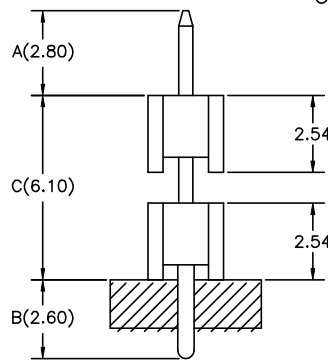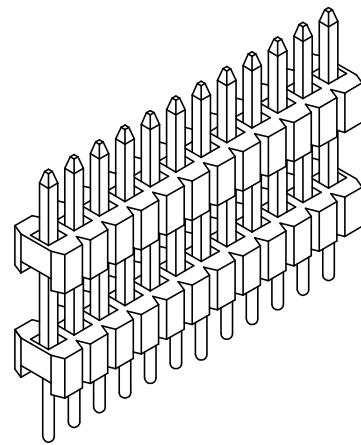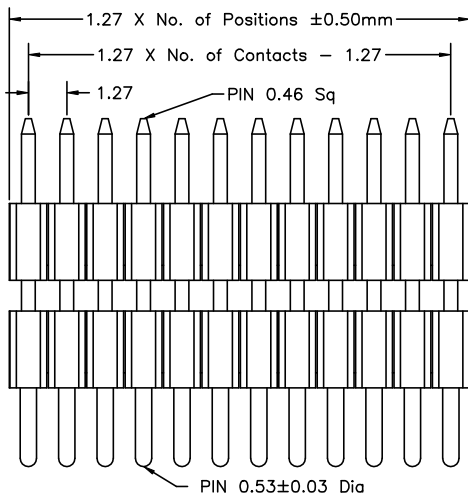

Recommended P.C.Board  
Hole Layout



## Order Information 0204S Series

Example: 0204S-20-02-A/C/B

Series No.	Number of Contacts	Contact Plating	Pin Length mm		
0204S	03 to 32 Contacts	Tin Plated 01	A	C	B
		Gold Plated	2.8	6.1	2.6
		Flash 02	For 0052S		
		10 μ" 10	6.0	6.1	2.6
		30 μ" 30	For 0053S		