
MAJOR LEAGUE ELECTRONICS 2mm (.079") c.l. Board Stacker Socket Strips-Custom






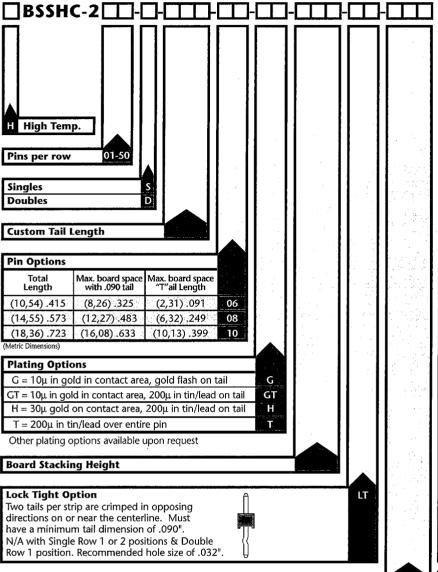


EXAMPLE: If you want a 20 position, single position elevated board socket with an elevated height of .400 and a tail of .114 order a BSSHC-220-S-114-08-T-400.

EXAMPLE: If you wanted a 50 position dual row socket with a board height of .500 and a tail of .164 then you would order a BSSHC-250-D-164-10-GT-500.

Mates with: TSHS, TSHR, TSHC, BSTS, BSTC, TSHCR, TSHSM, BSTCM





APPLICATION **BSSHC Socket plugged into Terminal Header** Product cut to specific sizes is noncancellable/nonreturnable.

Materials & Performance Specifications		Parts are subject to change without notice
	STANDARD	HIGH TEMPERATURE
Insulator	Black, glass filled, polyester	High temperature thermoplastic
Terminal	Phosphor Bronze	Phosphor Bronze
Insulation Resistance	5,000M Ω minimum	5,000M Ω minimum
Flammability	UL 94V-O	UL 94V-O
Temperature Range	-65°C to +125°C	-65°C to +250°C
Current Rating	1 ampere	1 ampere
Plating	All Plating Options over	All Plating Options over
	50μ in Ni	50μ in Ni



Position for Polarization Option