

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.454 kg min.

Electrical

Current Rating: 0.5A Per Pin Min.

Dielectric Withstanding Voltage: 500 RMS

Insulation Resistance: 1000MW min.

Physical

Housing: High Temperature, UL 94V-0 Rated In Black Color

Contact: Copper Alloy

Plating: See "ORDERING INFORMATION"

Operating Temperature: -40 to +105


Header Connector

HD99 Series


R/A, T/H Type

Plug

3.50mm [.138] Pitch

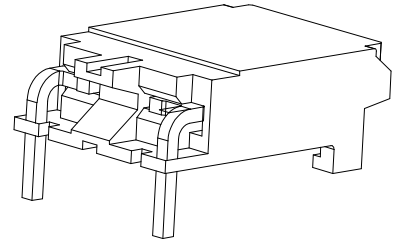

DRAWING

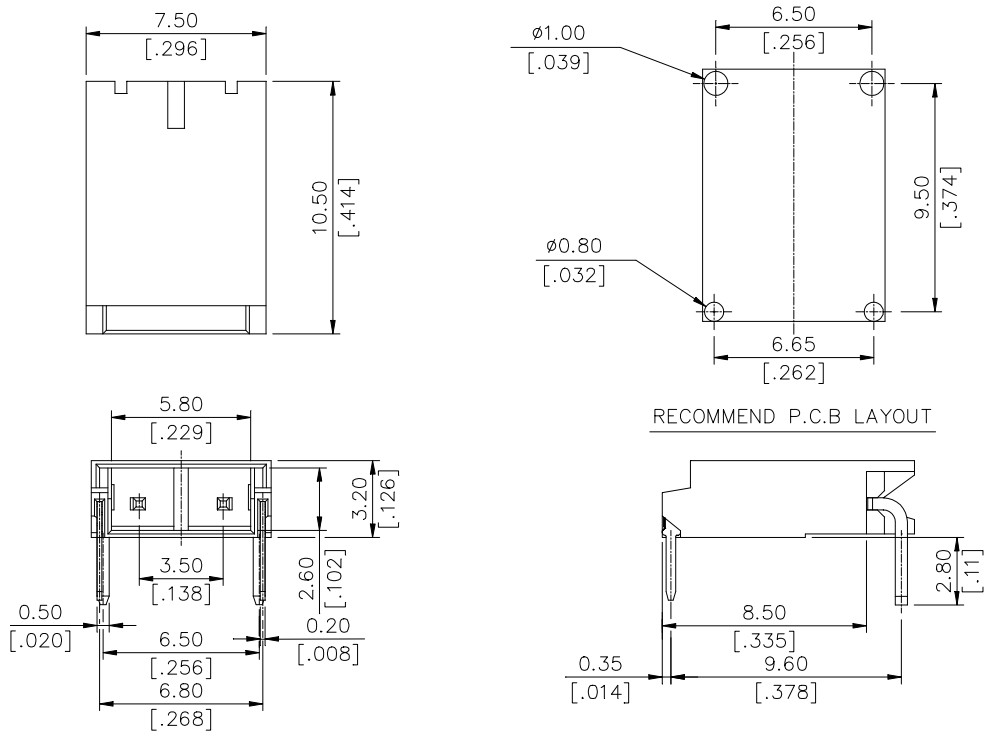

ORDERING INFORMATION

PRODUCT NO.: HD99***-*

Header

Polarizing Wall

Termination&Contact Type

No. Of Pos

02= 02 Pos

Option For Latch

None:Housing Without Latch

L : Housing With Latch

L2 : Housing With 2 Latch

Contact Area Plating

0 = Tin / Lead

F = Gold Flish With Lead Free RoHS COMPLIANCE

V = 15u" Min Gold With Lead Free RoHS COMPLIANCE

E = Tin Plated With Lead Free RoHS COMPLIANCE

H = 30 u" Min Gold With Lead Free RoHS COMPLIANCE