


# Ø 8.0 mm Mounting Flat Lens (Sunlight Readable LEDs)

**NEW PRODUCT**

- Unobtrusive lens for flush mounting
- High voltage option available
- MLQ 20
- Sunlight readable including blue
- MTBF 90,000 hrs

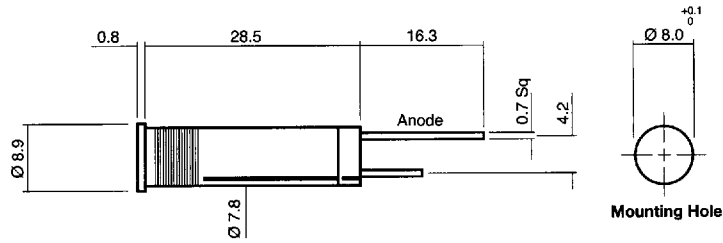

Scale 1 : 1  
Dimensions in mm (Typical)

## Ordering information and technical characteristics (Ta = 25°C)

Order code	Colour	Lens	Voltage DC Vopr	Current DC Iopr	Luminous Intensity Iv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg				
326 - 502 - 04	Red	Water Clear	2.1	20	250	660	180	0 to + 85	0 to + 85				
326 - 521 - 04	Yellow		2.2	20	2500	590							
326 - 512 - 04	Green		2.2	20	100	563							
326 - 930 - 04	Blue		3.6	20	1000	450							
326 - 502 - 20	Red		5/6	15/20	250	660							
326 - 521 - 20	Yellow		5/6	15/20	2500	590							
326 - 512 - 20	Green		5/6	15/20	100	563							
326 - 930 - 20	Blue		5/6	15/20	1000	450							
326 - 502 - 21	Red		12	20	250	660							
326 - 521 - 21	Yellow		12	20	2500	590							
326 - 512 - 21	Green		12	20	100	563							
326 - 930 - 21	Blue		12	20	1000	450							
326 - 502 - 22	Red		24	20	250	660							
326 - 521 - 22	Yellow		24	20	2500	590							
326 - 512 - 22	Green		24	20	100	563							
326 - 930 - 22	Blue		24	20	1000	450							
326 - 502 - 75	Red		110 VAC	6.0	75	660							
326 - 521 - 75	Yellow		110 VAC	6.0	750	590							
326 - 512 - 75	Green		110 VAC	6.0	30	563							
326 - 930 - 75	Blue		110 VAC	6.0	300	450							
327 - 502 - 04	Red		Coloured Diffused	2.1	20	250				660	180	0 to + 85	0 to + 85
327 - 521 - 04	Yellow			2.2	20	2500				590			
327 - 512 - 04	Green	2.2		20	100	563							
327 - 930 - 04	Blue	3.6		20	1000	450							
327 - 502 - 20	Red	5/6		15/20	250	660							
327 - 521 - 20	Yellow	5/6		15/20	2500	590							
327 - 512 - 20	Green	5/6		15/20	100	563							
327 - 930 - 20	Blue	5/6		15/20	1000	450							
327 - 502 - 21	Red	12		20	250	660							
327 - 521 - 21	Yellow	12		20	2500	590							
327 - 512 - 21	Green	12		20	100	563							
327 - 930 - 21	Blue	12		20	1000	450							
327 - 502 - 22	Red	24		20	250	660							
327 - 521 - 22	Yellow	24		20	2500	590							
327 - 512 - 22	Green	24		20	100	563							
327 - 930 - 22	Blue	24		20	1000	450							
327 - 502 - 75	Red	110 VAC		6.0	75	660							
327 - 521 - 75	Yellow	110 VAC		6.0	750	590							
327 - 512 - 75	Green	110 VAC		6.0	30	563							
327 - 930 - 75	Blue	110 VAC		6.0	300	450							
				V	mA	mcd	nm	deg	°C	°C			