





.156 CENTER HEADER

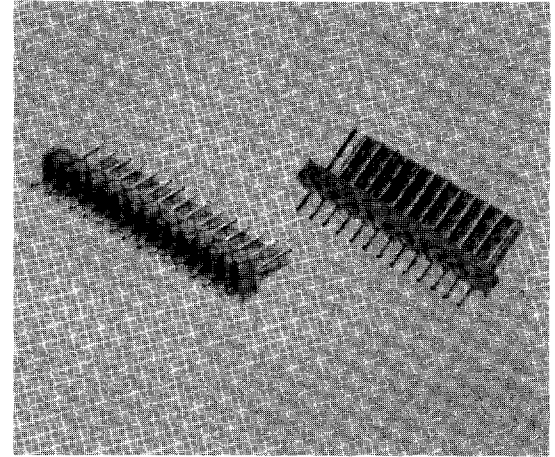

ORDERING INFORMATION



1. **DESCRIPTION**
CH = Center Header
2. **SPACING**
156 = .156" centers
3. **POSITION**
2 through 15
4. **PIN ANGLE**
S = Straight
RA = Right Angle
5. **PIN TYPE**
A = .045" square
B = .045" round
6. **LOCKING POLARIZATION**
L = With Lock/polarizer
B = No Lock/polarizer

FEATURES:

- .045 sq. or round post on .156" centers
- Available from 2 through 15 circuits
- Tin or gold plating options
- Available with or without friction lock
- UL94V-0 material
- Mates with Contact CS socket

CH SERIES SPECIFICATIONS:

MATERIALS:

Contacts Copper alloy
Plating Gold over nickel or tin plated
Insulator UL94V-0 Nylon 6/6

ELECTRICAL:

Current Rating 3 Amps max.
Voltage Rating 250 VAC
Contact Resistance 10 milliohms max.
Operating Temperature -55 to + 125 C

DIMENSIONAL DATA

All dimensions in (inches) and millimeters.

CONTACTS	A	B
2	3.96 (.156)	7.82 (.308)
3	7.92 (.312)	11.78 (.468)
4	11.88 (.468)	15.74 (.620)
5	15.84 (.624)	19.70 (.932)
6	19.80 (.780)	23.66 (1.087)
7	23.76 (.935)	27.62 (1.087)
8	27.72 (1.091)	31.58 (1.243)
9	31.68 (1.247)	35.54 (1.339)
10	35.64 (1.403)	39.50 (1.555)
11	39.60 (1.559)	43.46 (1.711)
12	43.56 (1.715)	47.42 (1.867)
13	47.52 (1.871)	51.11 (2.012)
14	51.49 (2.027)	55.07 (2.168)
15	55.45 (2.183)	59.03 (2.324)

*Millimeters (inches)

