


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/17/04	

APPROVED: _____
 DATE: _____ TITLE: _____

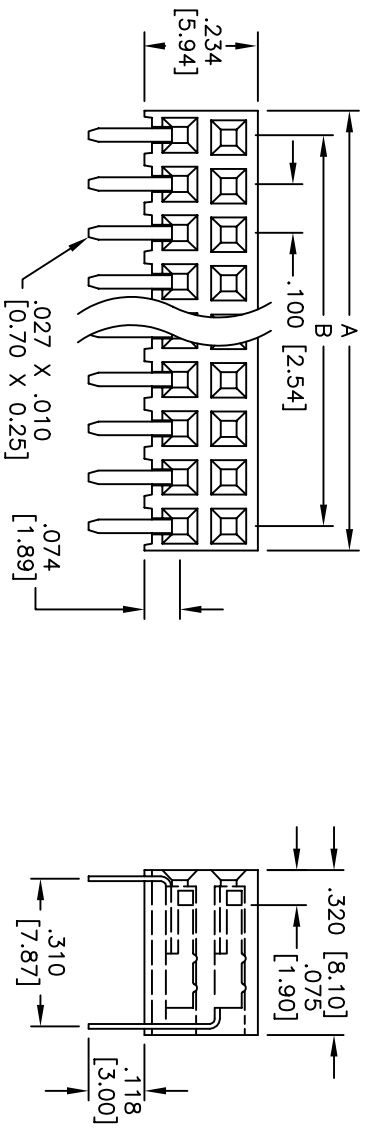

RECOMMENDED
PCB LAYOUT

A = .100 [2.54] X No. of Positions
 B = .100 [2.54] X No. of Spaces

SPECIFICATIONS:

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: 5u" Gold nom. over Nickel underplate on contact area, Tin over Copper underplate on solder tails
- Electrical: Operating voltage: 250 VAC max
- Current rating: 3 Amps max
- Insulation resistance: 5000 Mohms min @ 500 VDC
- Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +105°C

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RECEPTACLE STRIP, .100 DUAL ROW
 SIDE ENTRY, 5u" SEL GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES EXCEPT AS NOTED INCHES		HOLE SIZES	
.X	$\pm .10$	ϕ .XX	$\pm .10$.XXX	$\pm .015$
.XX	$\pm .020$	ϕ .XXX	$\pm .015$.XXX	$\pm .010$
.XXX	$\pm .015$	ϕ .XXX	$\pm .010$	DATE	
DRAWN		SS	11/17/04	TITLE	
CHECKED				SIZE	PART NO.
APPROVED				X	RS2BR-XX-SG-5
				REF:	SCALE: NTS
					SHEET 1 OF 1

6 5 4 3 2 1