

146510-1 ✓ ACTIVE

AMPMODU | AMPMODU Headers

TE Internal #: 146510-1

PCB Mount Header, Vertical, Board-to-Board, 2 Position, 2.54 mm [.1 in] Centerline, Unshrouded, Gold, Through Hole - Solder, Signal, AMPMODU Headers

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Assembly Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

Number of Positions: **2**

Number of Rows: **2**

## Features

### Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| PCB Connector Assembly Type       | PCB Mount Header      |
| Connector System                  | Board-to-Board        |
| Header Type                       | Unshrouded            |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |

### Configuration Features

|                              |          |
|------------------------------|----------|
| Stackable                    | Yes      |
| PCB Mount Orientation        | Vertical |
| Number of Positions          | 2        |
| Number of Rows               | 2        |
| Board-to-Board Configuration | Parallel |

### Electrical Characteristics

|                       |         |
|-----------------------|---------|
| Insulation Resistance | 5000 MΩ |
|-----------------------|---------|

### Body Features

|                       |       |
|-----------------------|-------|
| Primary Product Color | Black |
|-----------------------|-------|

### Contact Features

|                              |                 |
|------------------------------|-----------------|
| Contact Mating Area Length   | 8.38 mm[.33 in] |
| Mating Square Post Dimension | .64 mm[.025 in] |



|  |                 |
|--|-----------------|
|  | 15 µin          |
| Contact Shape & Form                           | Square          |
| PCB Contact Termination Area Plating Material  | Gold            |
| Contact Base Material                          | Brass           |
| Contact Mating Area Plating Material           | Gold            |
| Contact Mating Area Plating Material Thickness | .381 µm[15 µin] |
| Contact Type                                   | Pin             |
| Contact Current Rating (Max)                   | 3 A             |

### Termination Features

|   |                       |
|---|-----------------------|
| Square Termination Post & Tail Dimension    | .64 mm[.025 in]       |
| Termination Post & Tail Length              | 8.38 mm[.33 in]       |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

### Mechanical Attachment

|                         |             |
|-------------------------|-------------|
| Mating Alignment        | Without     |
| PCB Mount Retention     | Without     |
| PCB Mount Alignment     | Without     |
| Connector Mounting Type | Board Mount |

### Housing Features

|                    |                |
|--------------------|----------------|
| Centerline (Pitch) | 2.54 mm[.1 in] |
| Housing Material   | Thermoplastic  |

### Dimensions

|                             |                  |
|-----------------------------|------------------|
| Row-to-Row Spacing          | 2.54 mm[.1 in]   |
| Stack Height                | 19.55 mm[.77 in] |
| PCB Thickness (Recommended) | 1.4 mm[.055 in]  |

### Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -65 – 125 °C[-85 – 257 °F] |
|-----------------------------|----------------------------|

### Operation/Application

|                          |        |
|--------------------------|--------|
| Assembly Process Feature | None   |
| Circuit Application      | Signal |

### Industry Standards

|                        |                       |
|------------------------|-----------------------|
| Approved Standards     | CSA LR7189, UL E28476 |
| UL Flammability Rating | UL 94V-0              |



### Packaging Features

|                |        |
|----------------|--------|
| Packaging Type | Carton |
|----------------|--------|

### Product Compliance




[For compliance documentation, visit the product page on TE.com>](#)

|   |   |
|---|---|
| EU RoHS Directive 2011/65/EU                  | Compliant   |
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JUNE 2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.  |
| Solder Process Capability                     | Wave solder capable to 240°C  |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>




### Also in the Series | AMPMODU Headers

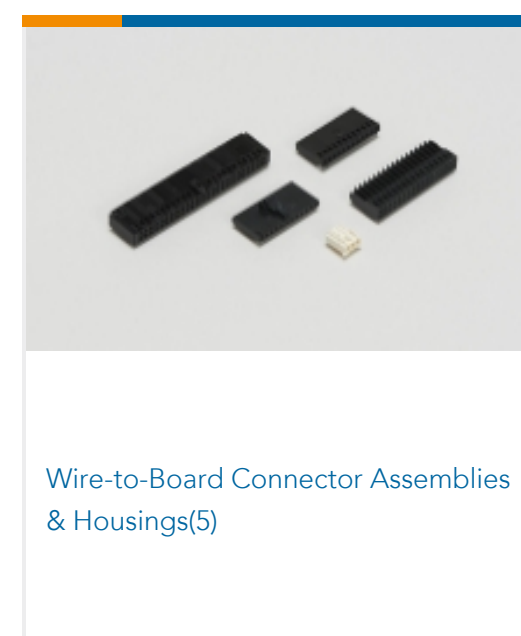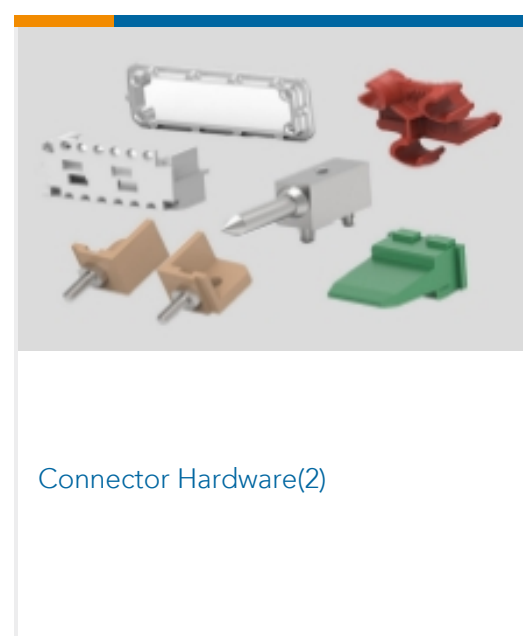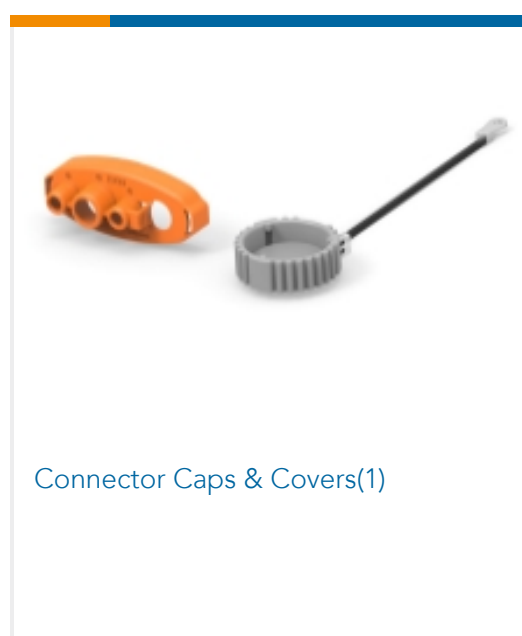



Wire-to-Board Connector Contacts(65)

## Customers Also Bought

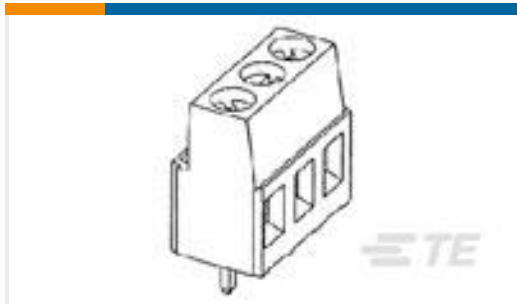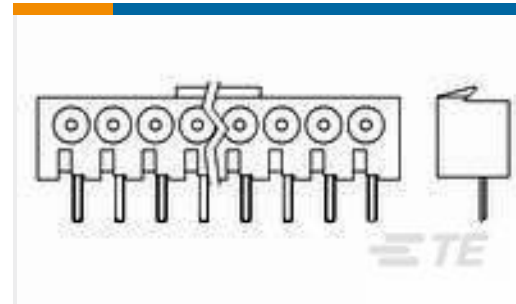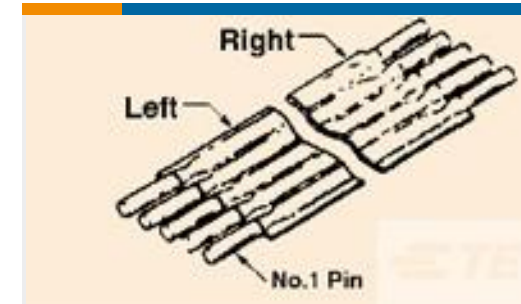TE Part #1-282856-0  
10P TERMINAL BLOCK PCB MOUNTTE Part #7-1437651-0  
6PCR-03-1224=6PCR ASSEMBLYTE Part #1888290-1  
.100 SRRA T-H, Latchg Flexstrip RecepTE Part #2-1437167-7  
FSP-23A-16TE Part #146510-2  
04 MODII HDR DRST UNSHRD STKGTE Part #146510-7  
14 MODII HDR DRST UNSHRD STKGTE Part #2-1437168-4  
FSP-25A-8

## Documents

### Product Drawings

02 MODII HDR DRST UNSHRD STKG

English

### Datasheets & Catalog Pages

AMPMODU Interconnection System

AMPMODU Interconnection System

English