




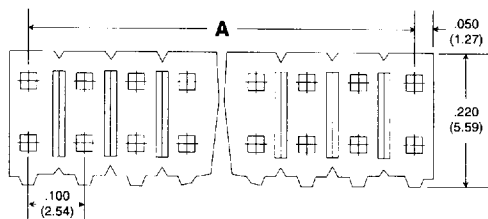

Dual Row Straight, Surface Mount & Right Angle Male Headers

Straight Dual Row Male Header

PH XXX - 127 X

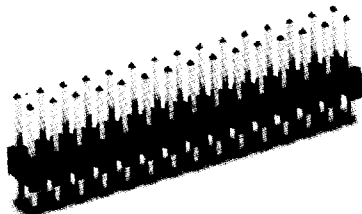

Features:

- Box interconnect to fit female receptacle.
- Available in lengths up to 36 pins
- .025" (.64mm) square terminals.

Terminals:

Copper Alloy

Plating:



- TL** - 100μ" Tin Lead alloy minimum over 50μ" Nickel minimum
- G** - 10μ" Gold minimum over 50μ" Nickel minimum
- TG** - 100μ" Tin Lead and 10μ" Gold minimum over 50μ" Nickel minimum. This is a selective plated male terminal.

Body Material:

High Temp. Glass Filled Thermoplastic Polyester (P.E.T.), U.L. Rated 94V-O, -60°C to 150°C (-76°F to 284°F)


A = Pitch .100" (2.54 mm) x Number of Terminals in Row

Surface Mount Dual Row Male Header

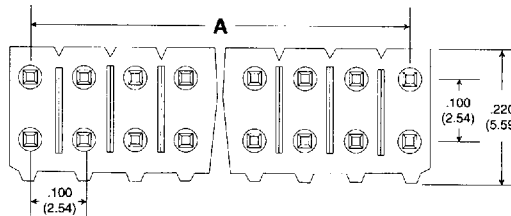

Board to Board



Part Number	C	D
PDXXX - 453TG	.230 (5.84)	.175 (4.44)
PDXXX - 468TG	.318 (8.08)	.232 (5.89)



A = Pitch .100" (2.54 mm) x Number of Terminals in Row

Right Angle Dual Row Male Header

PH XXX - 129 X

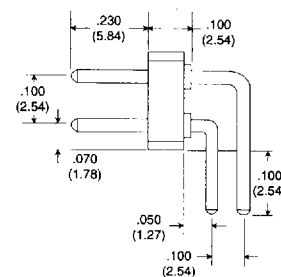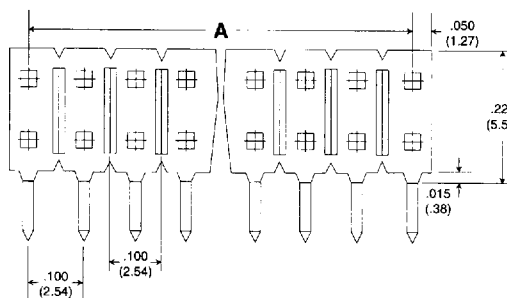

A = Pitch .100" (2.54 mm) x Number of Terminals in Row

How To Order

