

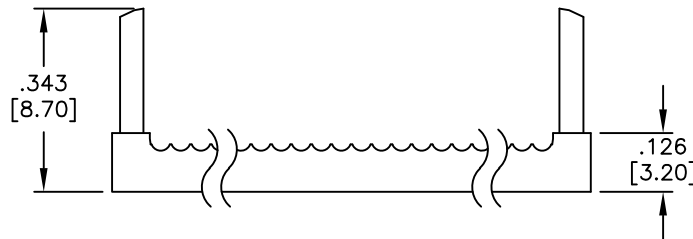

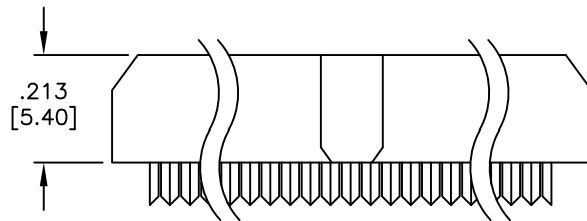


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	7440	RELEASED	01/16/07	
A		REVISED SHAPE	9/15/10	
B		REVISED SPEC.	4/20/16	AY/IC

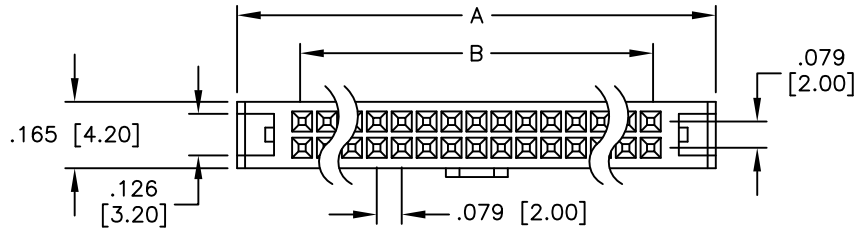

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:

30u" Gold over Nickel on contact area,
 Tin over copper underplate on IDC area.

Electrical:
 Voltage rating: 250 VAC
 Current rating: 3 Amp.
 Contact resistance: 20 mohms max.
 Insulation resistance: 5000 Mohms min. @ DC 500V
 Dielectric withstanding voltage: 250 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Positions: 6 thru 34, 38, 40, 44, 50, 60, 62, 64, 68
 A = .079 [2.00] x No. of Positions per Row + .205 [5.20]
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES		HOLES
.X ± .10	∅.X ± .10	
.XX ± .020	∅.XX ± .015	
.XXX ± .015	∅.XXX ± .010	
APPROVALS		DATE
DRAWN	BW	01/16/07
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE .079 [2.00] FLAT CABLE IDC SOCKET		
SIZE X	PART NO. 2FCS-XX-SG-PB	REV. B
REF: S00087T	SCALE: NTS	SHEET 1 OF 1