

REVISION AB


DO NOT SCALE FROM THIS PRINT


TABLE 1						
STYLE	TERMINAL	"B" POST	"L" LENGTH	-RA ONLY		
				"C"	"D"	"E"
-01	T-1S8-01-TX	.450 [11.43]	.750 [19.05]	N/R	N/R	
-02	T-1S8-02-TX	.500 [12.70]	.800 [20.32]	.100 [2.54]	.175 [4.45]	.320 [8.13]REF
-03	T-1S8-03-TX	.674 [17.12]	.955 [24.26]	**.195 [4.95]	**.156 [3.96]	**.320 [8.13] REF
-04	T-1S8-04-TX	.809 [20.55]	1.090 [27.69]	.195 [4.95]	.156 [3.96]	.534 13.46] REF
-05	T-1S8-11-TX	.150 [3.81]	.750 [19.05]	N/R	N/R	N/R
-06	T-1S8-05-TX	1.050 [26.67]	1.350 [34.29]	N/R	N/R	N/R

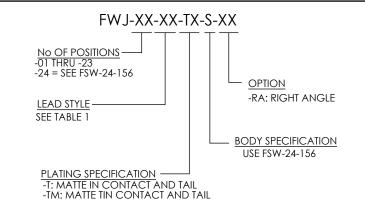

**=NOT RELEASED FOR PRODUCTION.

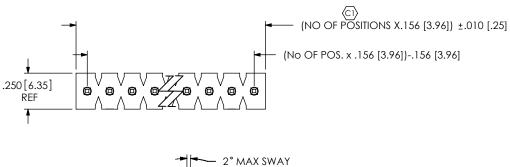

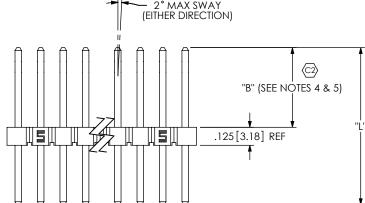



-RA **IN-PROCESS VIEW**

-RA -02 & -04 ONLY

NOTES:

- 1. © REPRESENTS A CRITICAL DIMENSION.
- 2. MIN PUSHOUT FORCE: 3 LBS.
 3. MAX ALLOWABLE BOW AFTER ASSEMBLY: .003 [.08] INCH/INCH
- 4. HEIGHT VARIATION BETWEEN PINS SHALL BE .005 [.13] MAX 5. BANDOLIER AREA TO BE POSITIONSED ABOUT OR TOWARDS
- STANDOFF SIDE OF BODY. ENTIRE BANDOLIER AREA MUST NOT BE LOCATED IN THIS AREA.
- 6. MAX CUT FLASH: .020 [.51]

DECIMALS

ANGLES

INSULATOR: PBT, UL 94 VO COLOR: BLACK

PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN

SHEET SCALE: 1.5:1

DESCRIPTION

.045 SQ POST ASSEMBLY

e-Mail info@SAMTEC.com

PHONE: 812-944-6733

520 PARK EAST BLVD, NEW ALBANY, IN 47150

FWJ-XX-XX-TX-S-XX

BY: DEAN PURVIS 2-19-86

DWG. NO.

SHEET 1 OF 1

FAX: 812-948-5047

code 55322

"C"

UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN INCHES. TOLERANCES ARE:

.XX: ±.01 [.3] .XXX: ±.005 [.13] .XXXX: ±.0020 [.051]

TERMINAL: PIN STYLES -01 THRU -05: PHOS BRONZE PIN STYLE -11: CDA 7025

C:\EnterpriseVault\DWG\MISC\MKTG\FWJ-XX-XX-TX-S-XX-MKT.SLDDRW

DO NOT SCALE DRAWING