
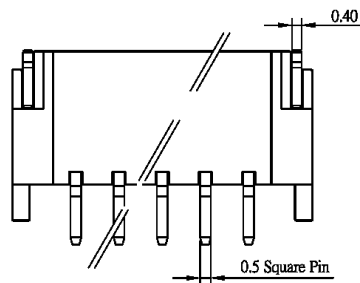



Recommended PC Board Pattern Dimensions

Dimensions			
Pins	A	B	C
2	2.00	7.90	4.60
3	4.00	9.90	6.60
4	6.00	11.90	8.60
5	8.00	13.90	10.60
6	10.00	15.90	12.60
7	12.00	17.90	14.60
8	14.00	19.90	16.60
9	16.00	21.90	18.60
10	18.00	23.90	20.60
11	20.00	25.90	22.60
12	22.00	27.90	24.60
13	24.00	29.90	26.60
14	26.00	31.90	28.60
15	28.00	33.90	30.60
16	30.00	35.90	32.60



SPECIFICATIONS

- Voltage rating: 100VAC/VDC
- Current rating: 2 amps AC/DC
- Contact material: High strength brass
- Contact plating: Tin over nickel
- Contact resistance: 10 milliohms max. initial value
20 milliohms max. after environmental testing
- Insulation resistance: 1,000 megohms min.
- Withstanding: 800VAC for 1 min.
- Wafer material: High temperature plastic, Nylon 46, UL94V-0
- PC board thickness: 0.8-1.6mm

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-1125-RA-SM-XX**

Description: Header, 2.0mm pitch, wire to board, SMD right-angle, SM3 type

