


V _{RSM}	V _{RRM}	I _{FRMS} (maximum values for continuous operation)			
		315 A	410 A	315 A	410 A
V	V	200 A	260 A	200 A	260 A
900	800	SKKD 201/08	SKKD 260/08	SKKE 201/08	-
1300	1200	SKKD 201/12	SKKD 260/12	SKKE 201/12	SKKE 260/12
1500	1400	SKKD 201/14	SKKD 260/14	SKKE 201/14	SKKE 260/14
1700	1600	SKKD 201/16	SKKD 260/16	SKKE 201/16	SKKE 260/16
2100	2000	-	SKKD 260/20 H4 ⁵⁾	-	-
2300	2200	-	SKKD 260/22 H4 ⁵⁾	-	-

Symbol	Conditions	SKKD 201 SKKE 201	SKKD 260 SKKE 260	Units
I _{FAV} I _D ¹⁾	sin. 180; T _{case} = 85 °C B2/B6 T _{amb} = 35 °C; P 3/180 F P 16/200 F	200 250 / 295 385 / 515	260 280 / 320 490 / 655	A A A
I _{FSM} i ² t	T _{vj} = 25 °C; 10 ms T _{vj} = 130 °C; 10 ms T _{vj} = 25 °C; 8,3 ... 10 ms T _{vj} = 130 °C; 8,3 ... 10 ms	6 000 5 000 180 000 125 000	11 000 10 000 605 000 500 000	A A A ² s A ² s
I _{RD}	T _{vj} max.; V _{RD} = V _{RRM}	9	15	mA
V _F V _(TO) r _T	T _{vj} = 25 °C (I _F = . . .); max. T _{vj} = 130 °C T _{vj} = 130 °C	1,35 (600 A) 0,80 0,8	1,25(750 A) 0,90 0,37	V V mΩ
R _{thjc} R _{thch} T _{vj} T _{stg}	} per diode/per module ²⁾	0,19 / 0,10 0,06 / 0,03 - 40 ... + 130 - 40 ... + 130	0,14 / 0,07 0,04/0,02 °C/W °C/W °C °C	°C/W °C/W °C °C
V _{isol} M ₁ M ₂ a w	a. c. 50 Hz; r.m.s.; 1 s/1 min to heatsink SI (US) units to terminals SI (US) units approx.	3600 / 3000 5 (44 lb. in.) ± 15 % ³⁾ 9 (80 lb. in.) ± 15 % ⁴⁾ 5 · 9,81 800	V~ Nm Nm m/s ² g	Nm Nm m/s ² g
Case	SKKD 201 SKKE 201	A 16 A 17	A 78 A 28	
	SKKD 260 SKKE 260			

SEMIPACK® 3 Rectifier Diode Modules

SKKD 201 **SKKE 201**
SKKD 260 **SKKE 260**
SKMD 260 ¹⁾



Features

- Heat transfer through aluminium nitride ceramic isolated metal baseplate
- Precious metal pressure contacts
- UL recognized, file no. E 63 532

Typical Applications

- Non-controllable rectifiers for AC/AC converters
- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motors
- SKKE: Free-wheeling diodes

¹⁾ SKMD 260 available on request

²⁾ SKKD types only

³⁾ See the assembly instructions

⁴⁾ The screws must be lubricated

⁵⁾ Visol 1 s / 1 min. = 4800/4000 V~

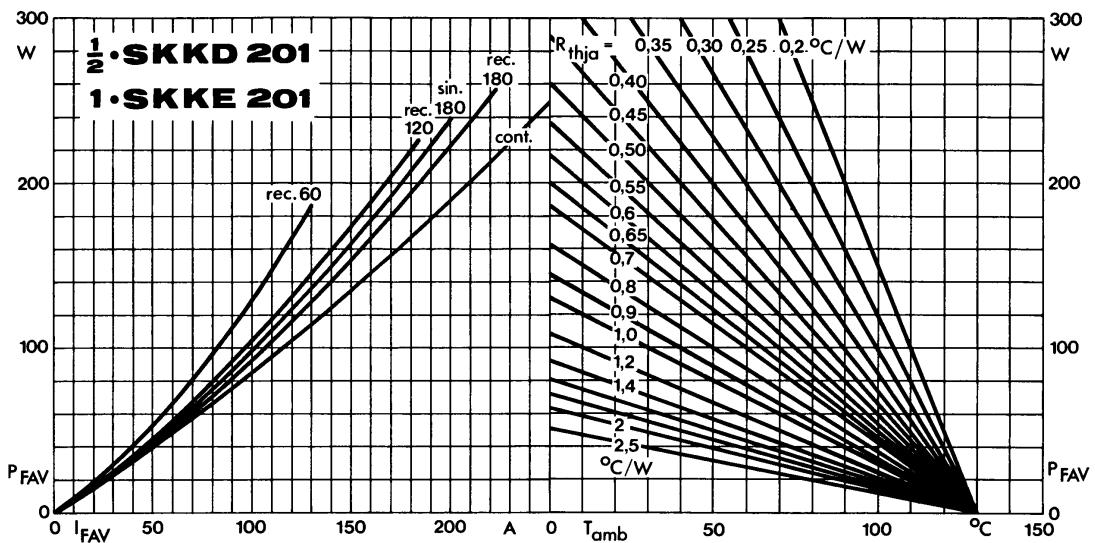


Fig. 11 a Power dissipation per diode vs. forward current and ambient temperature

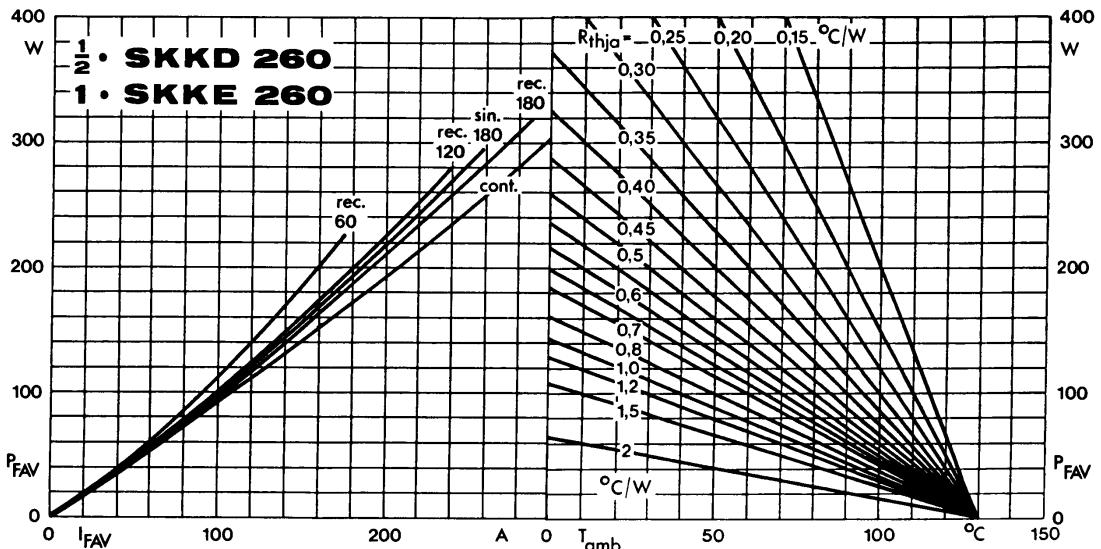


Fig. 11 b Power dissipation per diode vs. forward current and ambient temperature

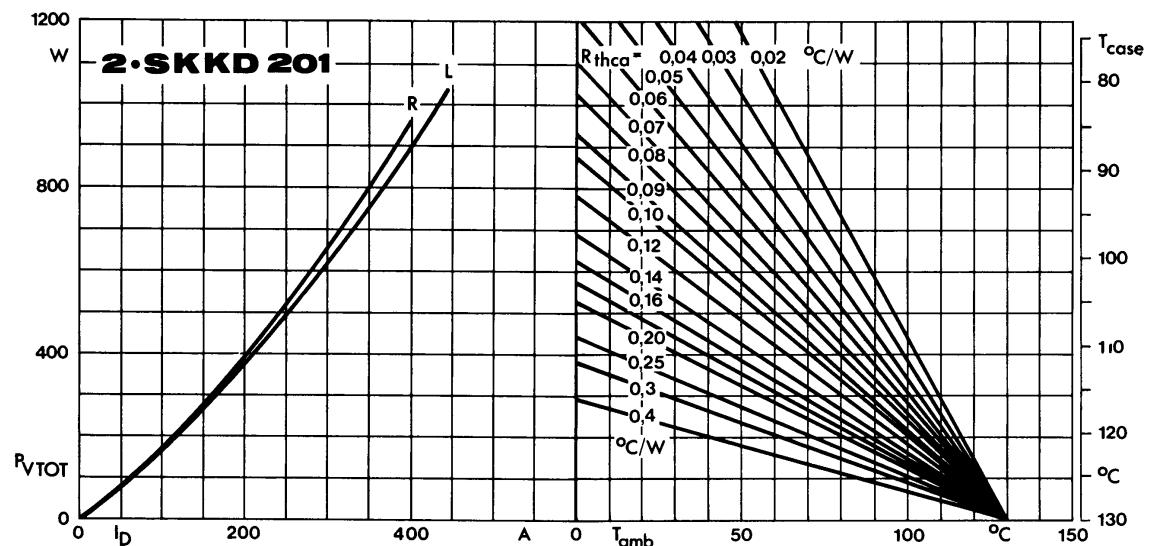


Fig. 12 a Power dissipation of two module vs. direct current and case temperature

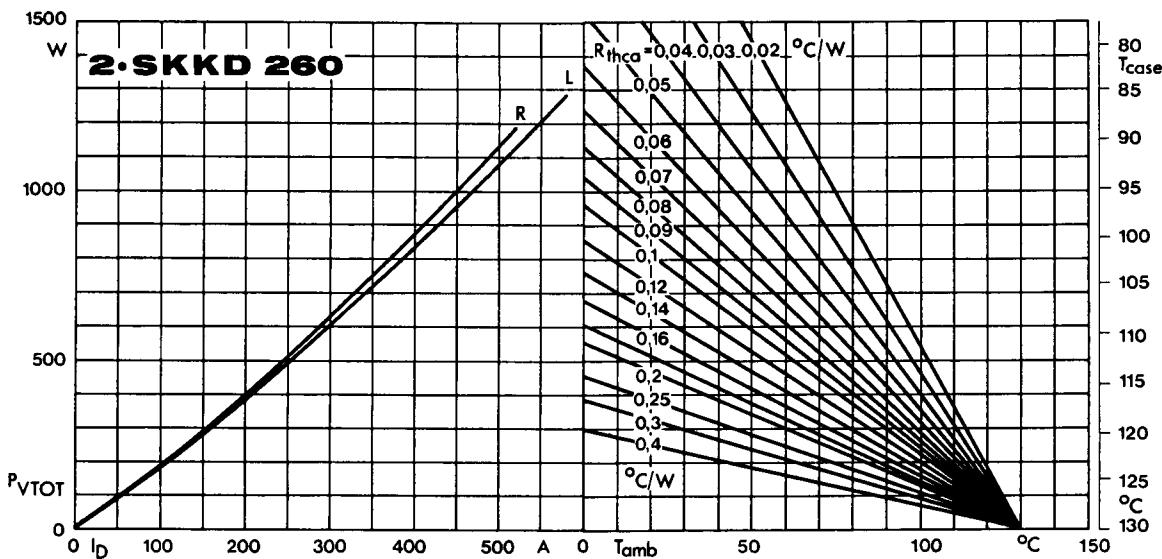


Fig. 12 b Power dissipation of two modules vs. direct current and case temperature

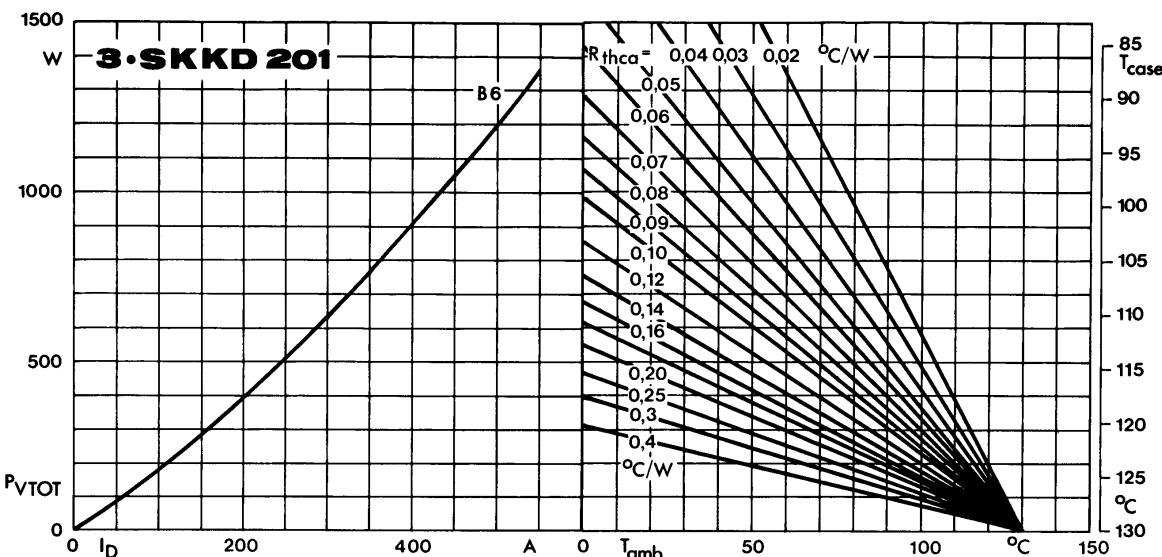


Fig. 13 a Power dissipation of three modules vs. direct current and case temperature

I:\Marketin\FRAMEDATA\datbl\B01-Semipack\SKKDE201-260.fm

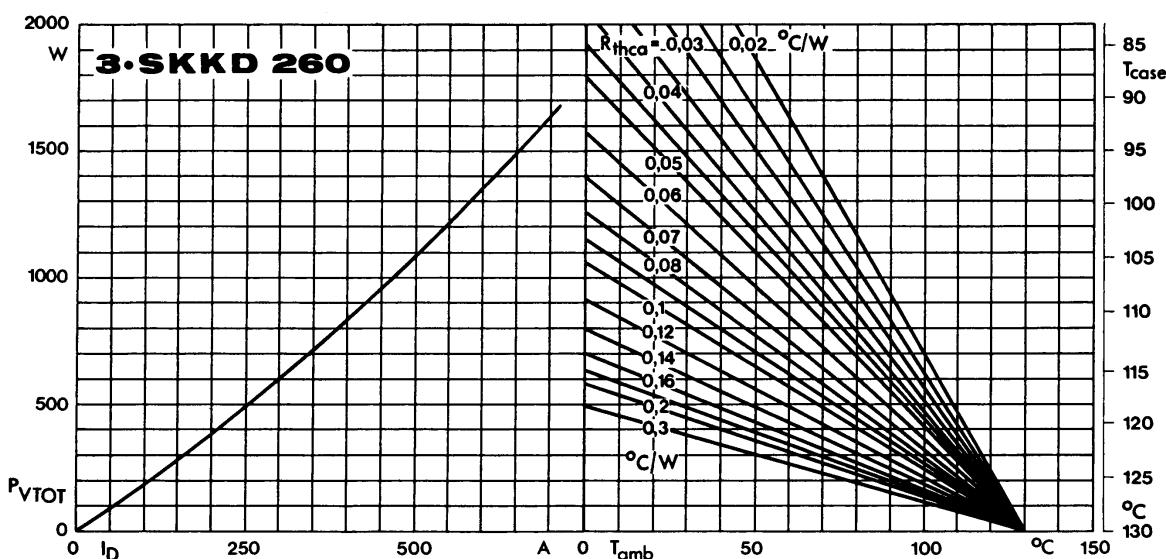


Fig. 13 b Power dissipation of three modules vs. direct current and case temperature

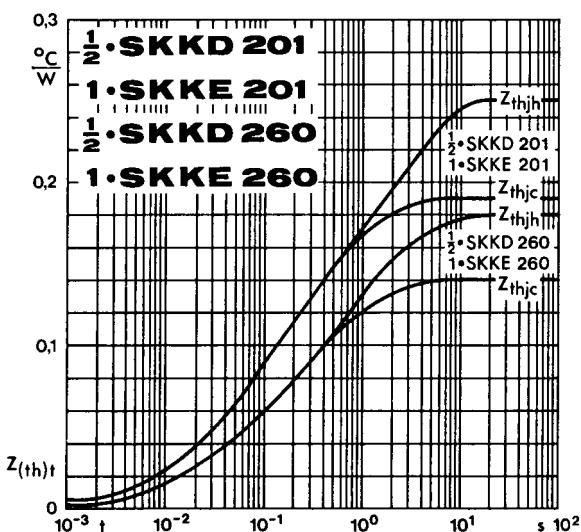


Fig. 14 Transient thermal impedance vs. time

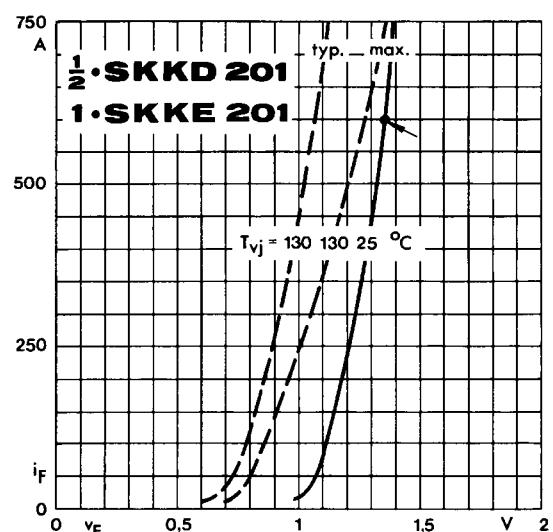


Fig. 15 a Forward characteristics

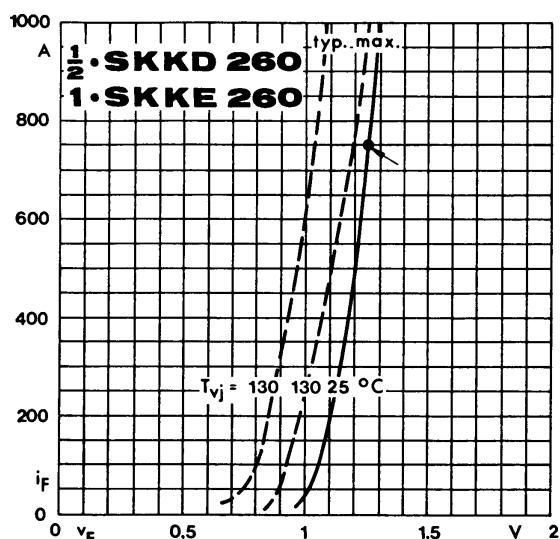


Fig. 15 b Forward characteristics

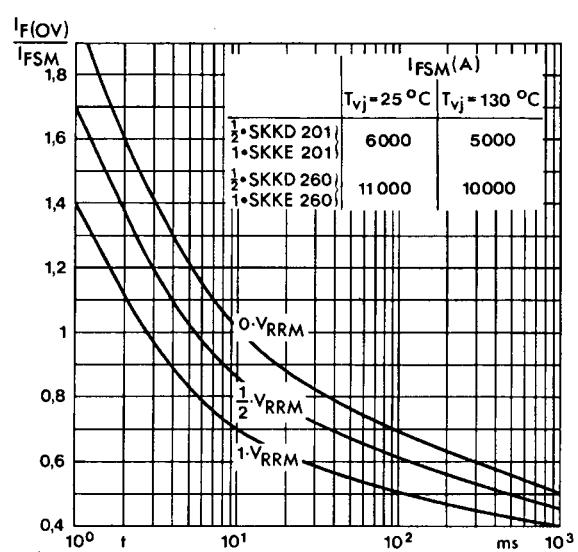
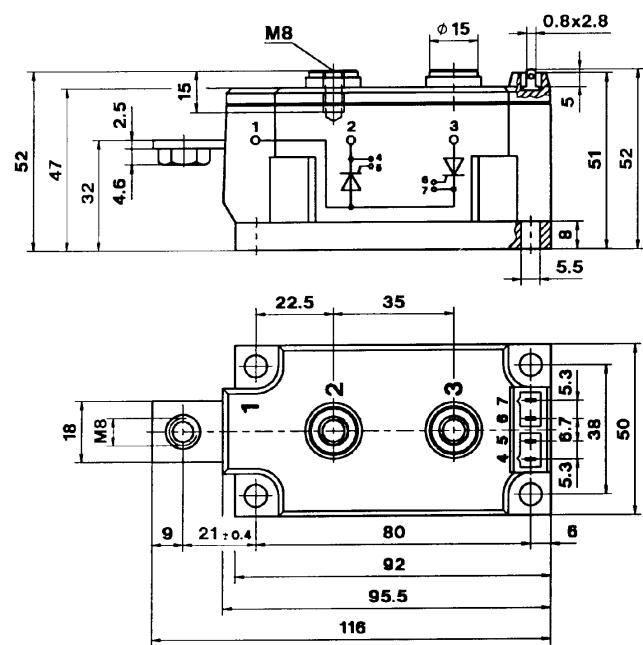


Fig. 16 Surge overload current vs. time


SKKT 131, SKKT 161

Case A 13


SEMIPACK 3 UL recognized, file no. E 63 532

**SKKH 131, SKKH 161**


Case A 14

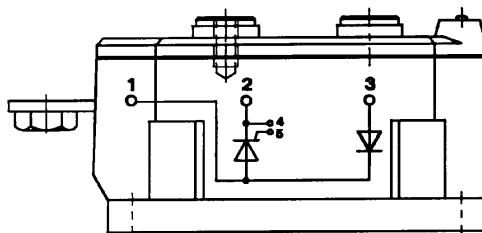**SKKL 131, SKKL 161**


Case A 15

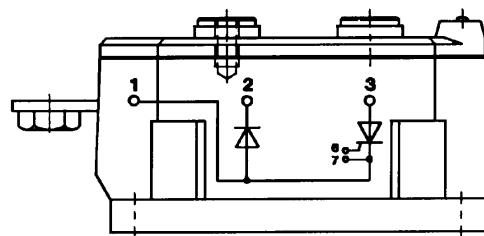**SKKD 201**

Case A 16

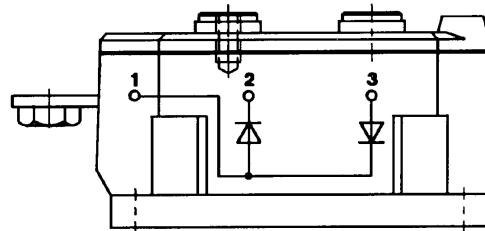**SKKE 201**

Case A 17

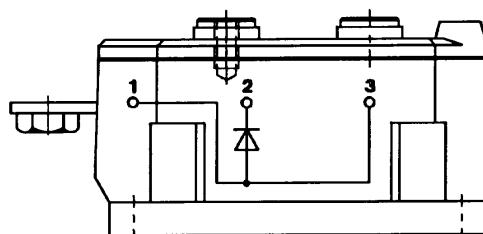


Dimensions in mm

SKKD 260

Case A 78

SEMIPACK® 3

UL recognition, file no. E 63 532

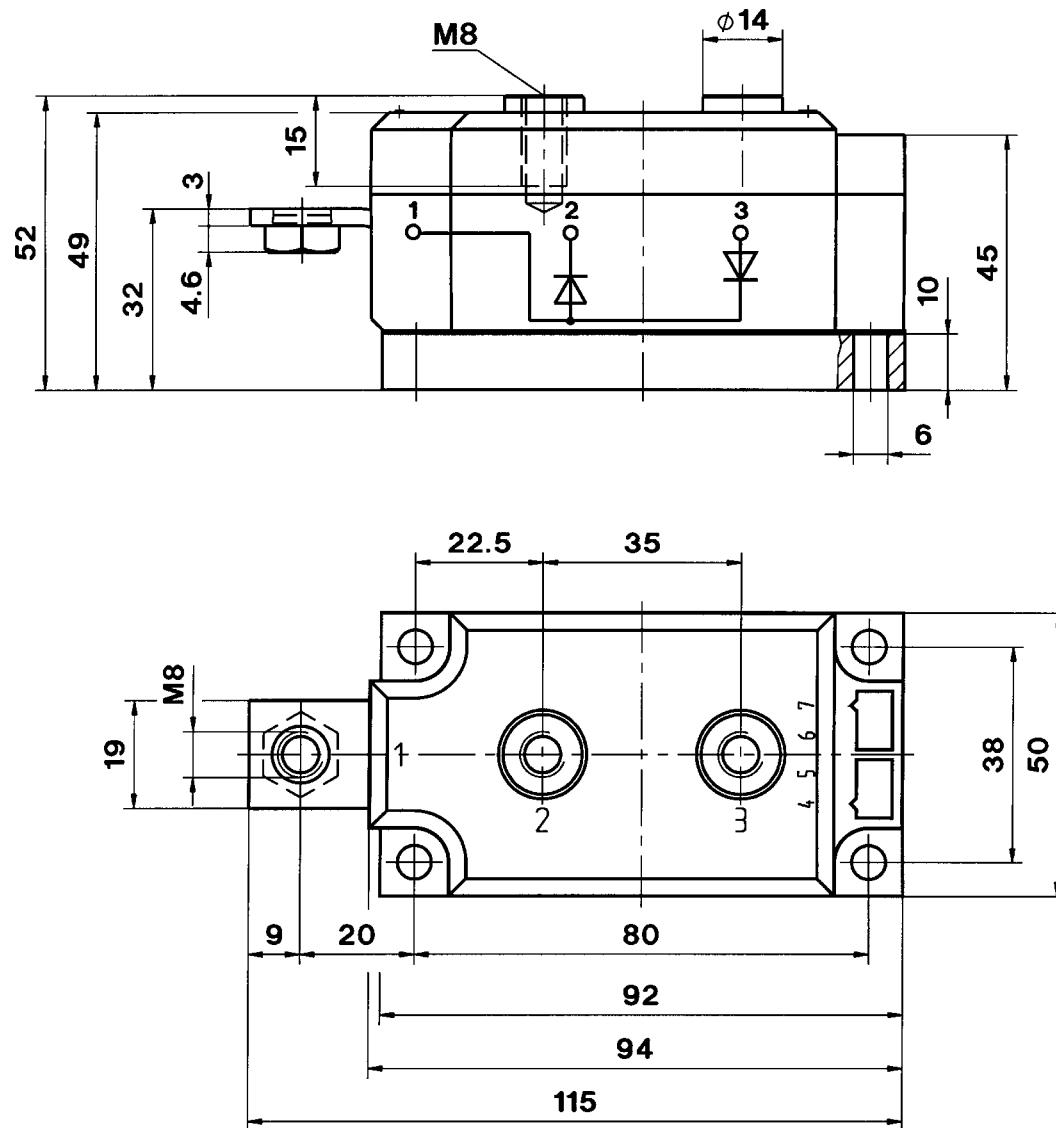


Dimensions in mm

SKKE 260

Case A 28

SEMIPACK® 3

UL recognition, file no. E 63 532

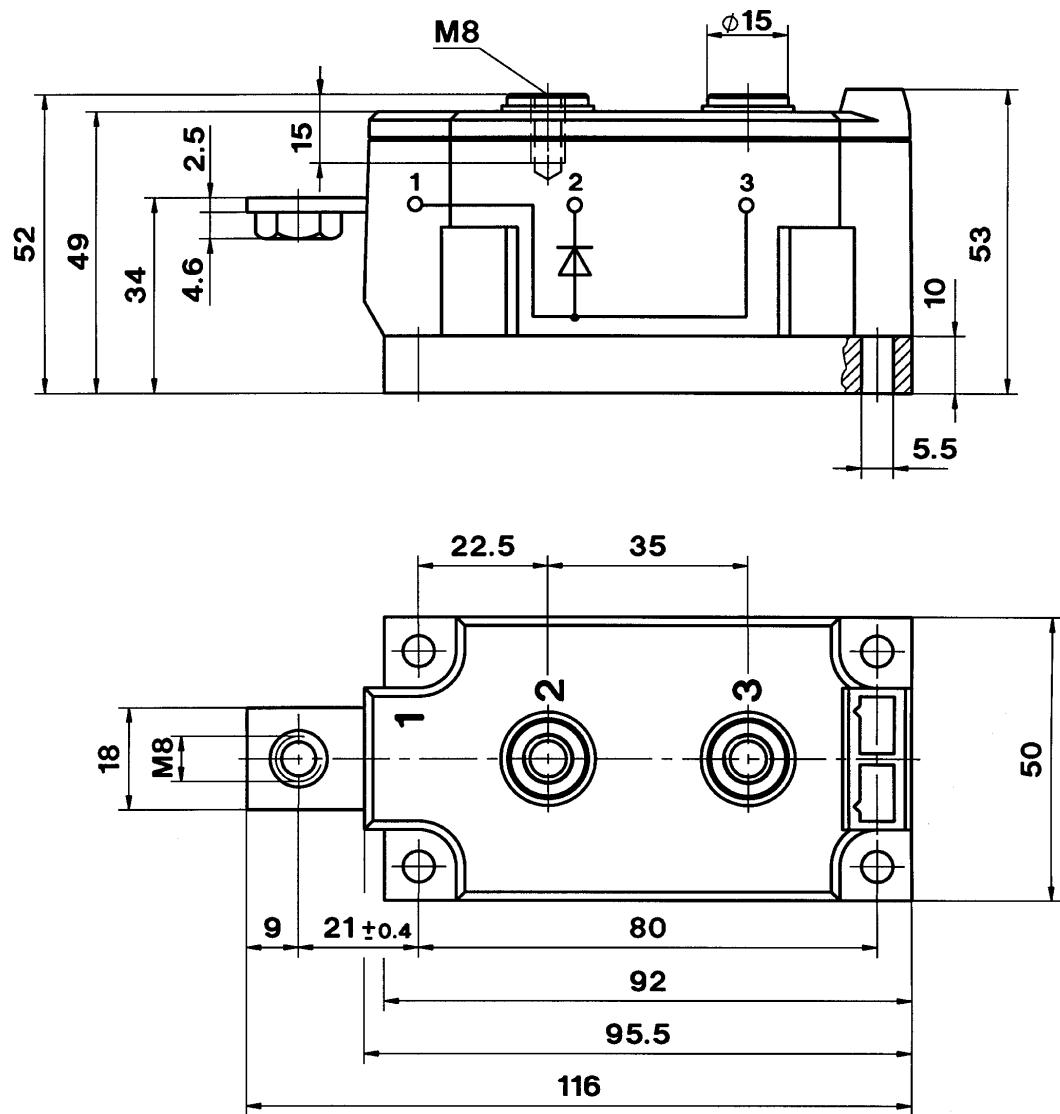

Dimensions in mm