


REV.	SPECIFICATION	ECN NO.	APPD.

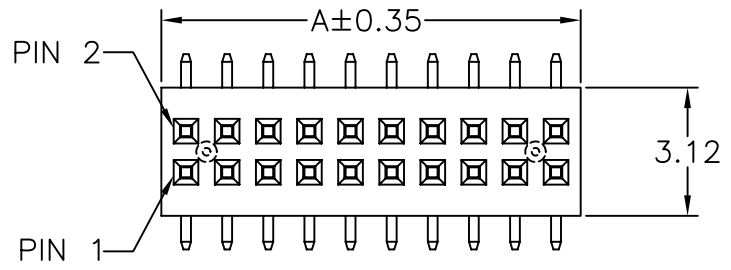

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:




Current Rating: 1 AMP.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -40°C~+105°C.

***RoHS Compliant**

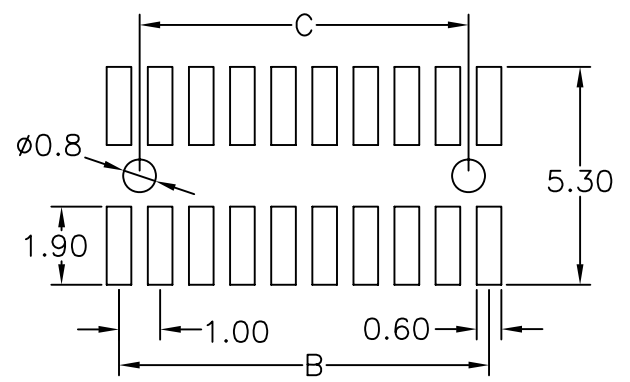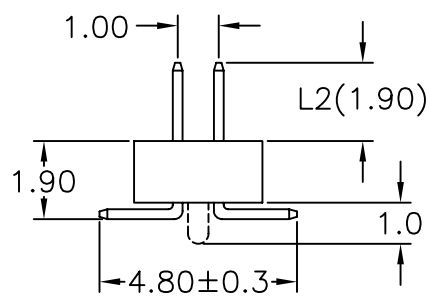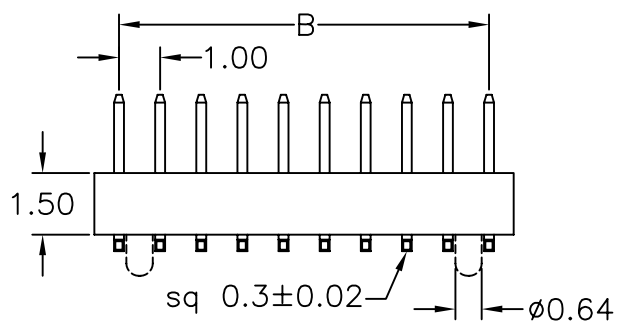

P.C. Board Layout

2411- 2 X 50 G 00 D P /L2 U
 Series Double Row No. of Pin Per Row G: Gold Plated T: Tin Plated 00: G/F 10: 10μ" 15: 15μ" 30: 30μ" D:SMD Type P: With Post N: Without Post U: Tube Package

Position	10 Thru 100
Dimension	
A	1.0 X No. of Positions /2-0.2
B	1.0 X (No. of Positions /2-1)
C	1.0 X (No. of Positions /2-2)

Tolerances	Drawn No.	2411D01003
x = ±0.25	Projection	
.x = ±0.20	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	Sunny 08/18'11

Title: 2411 Series Pin Header 1.0mmx1.0mm
 535

OUPIN
 OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 2411-2XxxGOODx/L2U
 SHEET 1/1 Ver.No. A3