
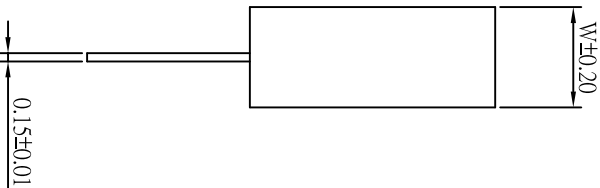
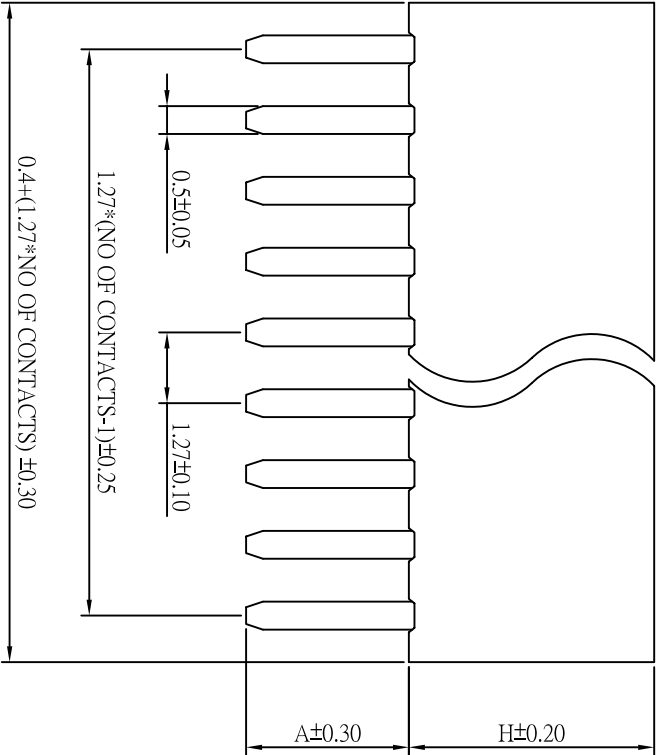


CUSTOMER COPY



ORDER INFORMATION

186 06 XX XX X

Plating:
 2: Selective Gold
 3: All Gold
 No. Of Contact
 (02 ~ 40)

Type _____
 Pin Chart _____

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

SPECIFICATION


- * Current Rating:
1 A
- * Withstanding Voltage:
500 VAC (1 min.)
- * Insulation Resistance:
1000 Megohms MIN.
- * Contact Resistance:
30 Milliohms MAX.
- * Operating Temperature:
-55°C to +105°C
- * Retention Force:
450g MIN.

MATERIAL

- * Contact: Phosphor Bronze
- * Insulator: High Temperature Plastic
- * Plating: All Gold or Selective Gold

Pin Chart

No.	A	H	W
00	2.10	4.60	2.54
01	3.00	4.40	2.20
02	2.10	4.40	2.20
03	2.40	2.20	2.54
04			

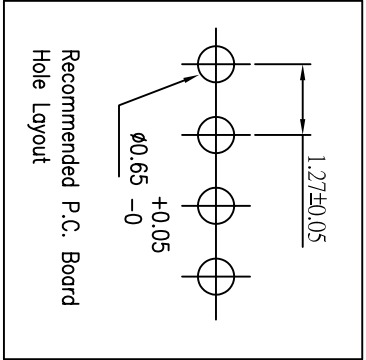

ACMELUX CO., LTD.

TEL:886-2-85124595 FAX:886-2-85124322


SCALE: 0.0±

TITLE: 1.27MM (.05")Center Female

UNIT: MM

HEADER Single Row Profile:

MATL:



DWG. NO. C18606XXXXX

DR BY: JACK LIN

PART NO: 114100

APP BY:

CHK BY: