




Quartz Crystal Oscillators ---Type: ZPB-5

SPECIFICATIONS:

Frequency Range	400.000KHz~160.000MHz		
Frequency Tolerance @25°C	±100ppm(Standard)		
Frequency Stability Over Temp.	±100ppm(Standard)		
Operating Temperature	-10°C~+60°C (Standard)		
Storage Temperature	-55°C~+125°C		
Supply Voltage	5.0±10% VDC 3.3±10% VDC		
Output Load	TTL	TTL, CMOS	
Supply Current (max):			
400.000KHz≤F<24.999MHz	20mA	20mA	
25.000MHz≤F<100.000MHz	40mA	40mA	
100.000MHz≤F≤160.000MHz	80mA	80mA	
Rise/Fall Time (max):			
400.000KHz≤F<24.999MHz	10 ns	10 ns	
25.000MHz≤F<100.000MHz	5 ns	10ns	
100.000MHz≤F≤160.000MHz	4 ns	5ns	
Output Level	Logic "1" :	2.4 min	4.5 min
	Logic "0" :	0.4 max	0.5 max
Start-up Time (Max)	10~35 ms	10ms	

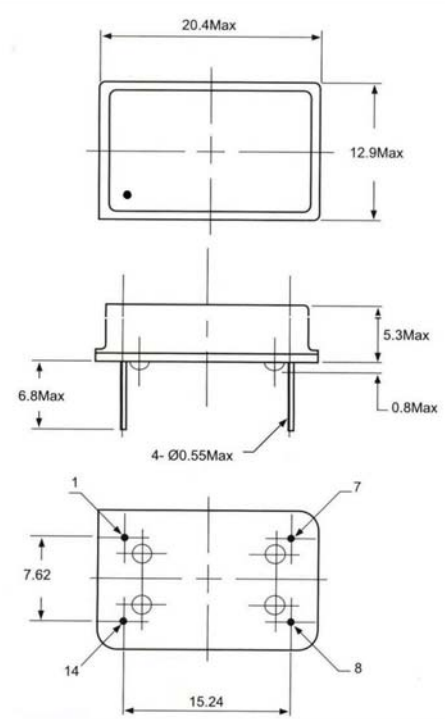

Output Load and Symmetry

	5TTL	10TTL	TTL/ CMOS	CMOS 15pF	CMOS 50pF
50±5%	*A	*D	H	J	F
50±10%	B	L	R	K	G

*Not available, if frequency>70MHz and V_{DD}=5.0V

Temperature Range and Stability

	±15ppm	±20ppm	±25ppm	±30ppm	±50ppm	±100ppm
A0= 0~+50	○	○	○	○	○	○
A1= -10~+60	○	○	○	○	○	○
A2=-20~+70	○	○	○	○	○	○
A3= -30~+75	—	—	○	○	○	○
A4=-40~+85	—	—	○	○	○	○
A5=-55~+85	—	—	—	—	○	○
A6=-55~+105	—	—	—	—	—	○

PIN	FUNCTION
# 1	NC or Tri-state E/D
# 7	GROUND
# 8	OUTPUT
# 14	VDD

ORDRE OPTION:

Type	Frequency	Supply Voltage (V)	Freq. Tolerance (ppm)	Freq. Stability (ppm)	Operating Temp. (°C)	Output Load & Symmetry	Tri-state Function
ZPB-5	400KHz~100MHz	V5 = 5.0±10% VDC V3 = 3.3±10% VDC	±15 ±20 ±25 ±30	±15 ±20 ±25 ±30	A0= 0~+50 A1=-10~+60 A2=-20~+70 A3= -30~+75 A4= -40~+85 A5=-55~+85 A6=-55~+105	A, D, H, J, F B, L, R, K, G	E = Tri-state
	100 MHz~160MHz	V5 = 5.0±10% VDC	±50 ±100	±50 ±100			

i.e. : ZPB-5-400.000K-V5-30/50-A1 -A-E