
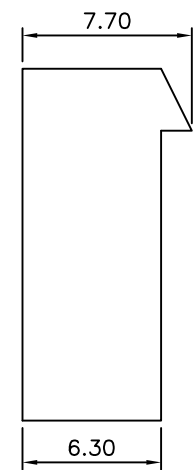
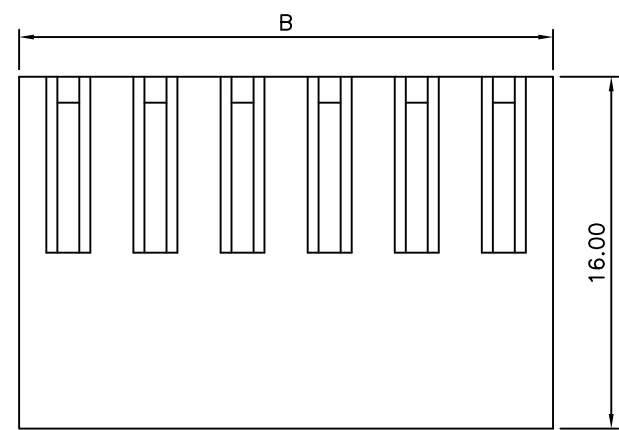


**SPECIFICATION**  
 Current Rating:7A AC/DC  
 Voltage Rating:250V AC/DC  
 Insulation Resistance:1000 Megohms  
 Withstand Voltage:1000V AC/Minute  
 Material:Nylon66 UL94V-2  
 Circuits:2-20 Circuits Available

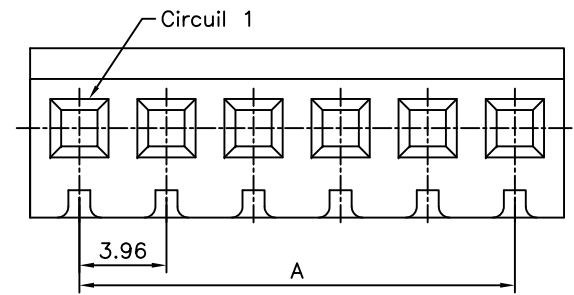

Circuits	A	B
2	3.96	8.43
3	7.92	12.39
4	11.88	16.35
5	15.84	20.31
6	19.80	24.27
7	23.76	28.23
8	27.72	32.19
9	31.68	36.15
10	35.64	40.11
11	39.60	44.07
12	43.56	48.03
13	47.52	51.99
14	51.48	55.95
15	55.44	59.91
16	59.40	63.87
17	63.36	67.83
18	67.32	71.79
19	71.28	75.75
20	75.24	79.71

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.5 .XX ±0.25 .XXX ±0.10 ANG: ±2°
PART No. KKXXH		MEI		
DRAWING No. KKXXH		CHECKED BY HZF		
		DRAWING BY JLT		
SCALE	NONE	REV.	A0	UNIT mm

△ A0	NEW RELEASE	HZF	03/18/2007
NO. REV.	REVISIONS	CHK	DATE