

EFD08 FEMALE HEADER, SIDE ENTRY TYPE

Single Row 02 to 40 Contacts
Pitch: 2.54mm

SPECIFICATION

MATERIAL

Insulator: P.B.T, rated UL94V-0, Black

Contact: Phosphor Bronze

ELECTRICAL





Current rating: 3 Amps max.

Contact resistance: 20 m ohms max.

Insulation resistance: 5000 Megohms min. @ 500 VDC

Dielectric withstanding voltage: AC 500V

Operating temperature: -40IJ TO +105IJ

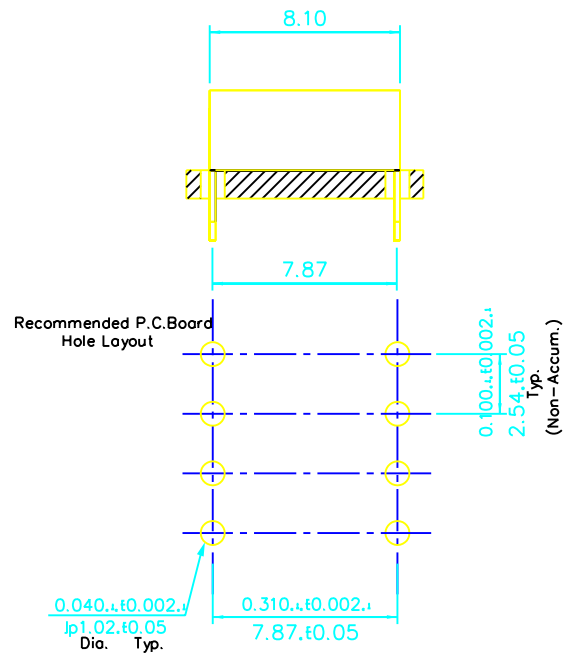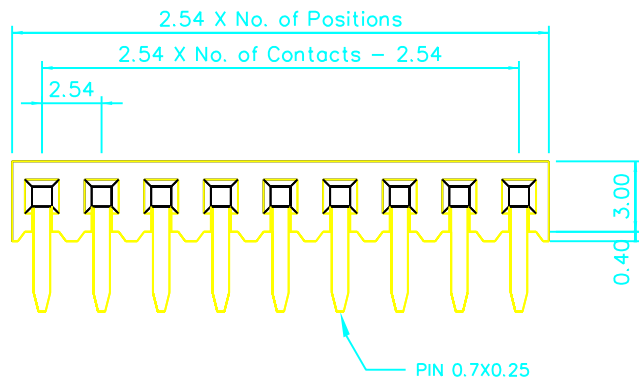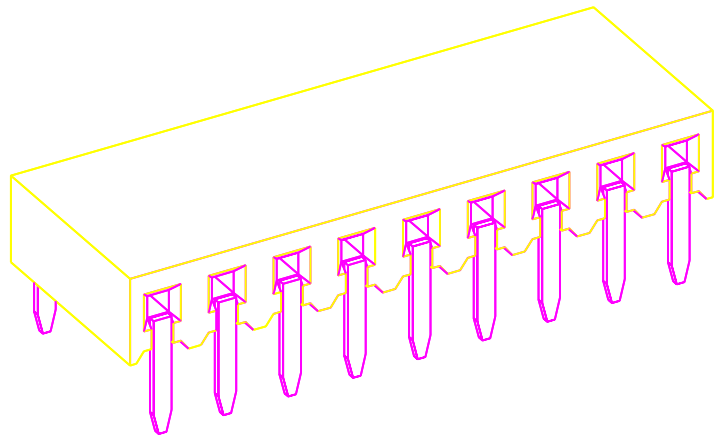

HOW TO ORDER

EFD08-	XX-	X-	X
I	I	I	I
SERIES NO.	NUMBER OF CONTACTS	CONNECTOR TYPE	CONTACT PLATING
I	I	I	I

NO. OF CONTACT=CODE	DEFINITION CODE	DEFINITION CODE
02 TO 40 CONTACTS	Right Angle R	Tin plated: T Gold plated: flash 10u" 15u" 30u" A B C D Selective gold: selective gold 5u" 10u" 15u" 30u" H I J K L

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	.±5
0.	.±0.5
.0	.±0.3
.00	.±0.2

WAVE-TECH CO., LTD.
 TEL: 886-03-3795039
 FAX: 886-03-3699403
 E-Mail: wavecom@ms59.hinet.net

SCALE	3 / 1
UNIT	mm
DRAWN	
CHECKED	
APPROVED	
SIZE	A4
REV.	B
FILE NAME	EFD08-01

DRAWIN NAME
 FEMALE HEADER, SIDE ENTRY TYPE
 Pitch: 2.54mm
 PRODUCT NO.
 EFD08-XXXX