


P.C.B LAYOUT

Features:

- \* Available in 2 through 15 circuits
- \* Material: Insulator: Nylon 66 UL 94V-0 or PBT UL 94V-0  
Contact: 0.64mm(.025") square pin, brass, tin plated

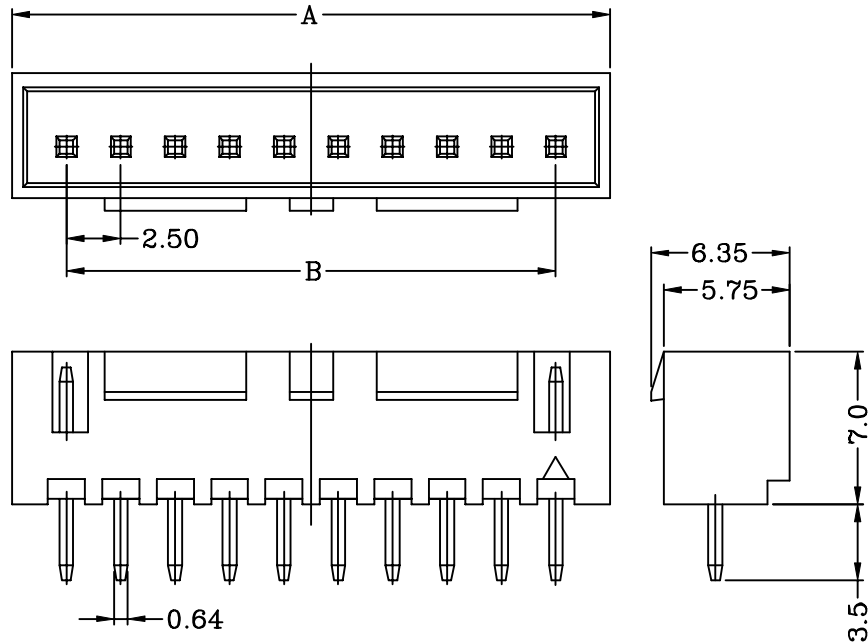

Straight Angle

Circuits	Part No	Dimension mm		Qty/bag
	Straight Angle	A	B	
2	<b>YH25-D-02</b>	7.48	2.50	1000
3	<b>YH25-D-03</b>	9.98	5.00	1000
4	<b>YH25-D-04</b>	12.48	7.50	1000
5	<b>YH25-D-05</b>	14.98	10.00	1000
6	<b>YH25-D-06</b>	17.48	12.50	1000
7	<b>YH25-D-07</b>	19.98	15.00	500
8	<b>YH25-D-08</b>	22.48	17.50	500
9	<b>YH25-D-09</b>	24.98	20.00	500
10	<b>YH25-D-10</b>	27.48	22.50	500
11	<b>YH25-D-11</b>	29.98	25.00	500
12	<b>YH25-D-12</b>	32.48	27.50	500
13	<b>YH25-D-13</b>	34.98	30.00	500
14	<b>YH25-D-14</b>	37.48	32.50	500
15	<b>YH25-D-15</b>	39.98	35.00	500



PART NO. <b>YH25-D-xx</b>		CHECKED BY CY	TOLERANCES ARE .X ± .XX ± .XXX ± AWG	DESCRIPTION: <b>2.50mm pitch wafer D/S</b>			
DWG NO. <b>YH25-D-xx</b>							
FILE NO.		DRAWING BY		AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1	PROJECTION					

焜倫有限公司