

Customer Information Sheet

DRAWING No.: M50-432XX05 SHEET 2 OF 2


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION



ALL DIMENSIONS IN mm

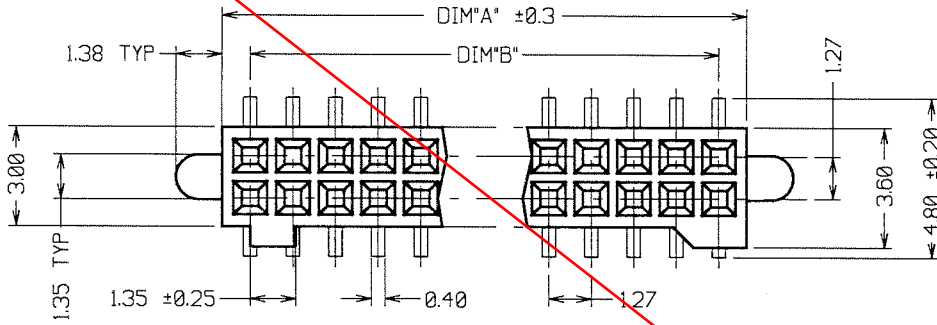

PART NUMBER	No. WAYS	DIM"A"	DIM"B"	DIM"C"
M50-4321005	10+10	13.10	11.43	14.48
M50-4321505	15+15	19.45	17.78	20.83
M50-4322005	20+20	25.80	24.13	27.18
M50-4322505	25+25	32.15	30.48	33.53
M50-4323005	30+30	38.50	36.83	39.88
M50-4324005	40+40	51.20	49.53	52.58
M50-4325005	50+50	63.90	62.23	65.28

MATERIALS:-
 MOULD = LCP UL94V-0 (BLACK)
 CONTACTS = PHOSPHOR BRONZE
 FINISH = GOLD

SPECIFICATION:
 CURRENT RATING - 1.0A
 VOLTAGE RATING - 150V AC
 DIELECTRIC STRENGTH - 500V ONE MINUTE
 TEMPERATURE RANGE - -40°C TO +105°C

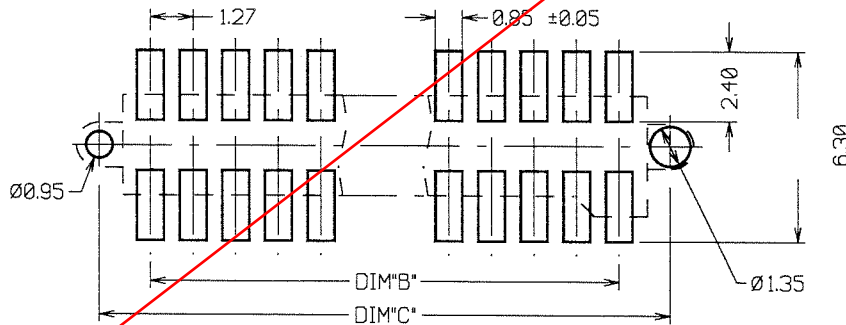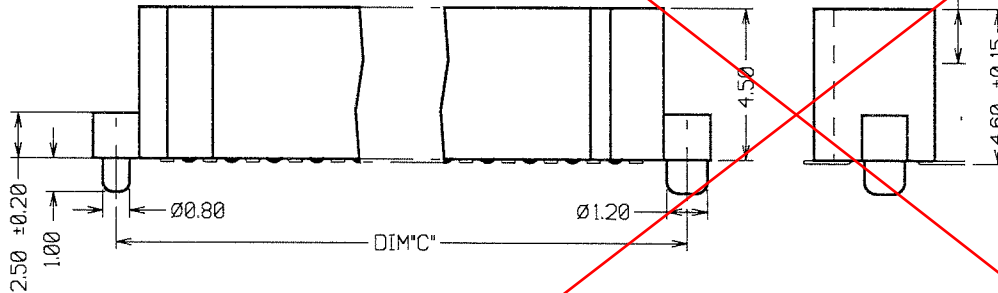

OBSOLETE

ORDER CODE:

M50-432XX05

No OF CONTACTS:-
 10, 15, 20, 25, 30, 40, 50

RA	4	13.09.07	9854
NAME	ISS.	DATE	C/NOTE
APPROVED:	<i>[Signature]</i>		
CHECKED:	<i>[Signature]</i>		
DRAWN:	A LIOTTA		
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
 X. - ±1mm
 X.X - ±0.25mm
 X.XX - ±0.10mm
 X.XXX - ±0.01mm
 ANGLES - ±5°
 UNLESS STATED

MATERIAL:
 SEE ABOVE
 FINISH: SEE ABOVE
 S/AREA: mm²

TITLE:
 1.27mm PITCH SMT
 DUAL ROW SOCKET

DRAWING NUMBER:
M50-432XX05

HARWIN INC
 U.S.A.
 TEL: (812) 285 0055
 FAX: (812) 285 0056

HARWIN PLC
 U.K.
 TEL: 023 9237 0451
 FAX: 023 9231 4590

HARWIN PTE
 SINGAPORE
 TEL: 65 7794909
 FAX: 65 7793868

SHT
 2
 OF
 2