


TECHNICAL DATA
DATA SHEET 2012, REV -

**THREE PHASE FULL WAVE
BRIDGE RECTIFIER ASSEMBLY**

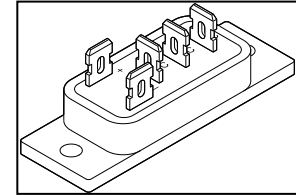

DESCRIPTION: A 50/100/150 VOLT, 25 AMP, 30 NANOSECOND THREE PHASE BRIDGE RECTIFIER ASSEMBLY.

MAXIMUM RATINGS

All ratings are at $T_A = 25^\circ\text{C}$ unless otherwise specified.

RATING	CONDITIONS	MIN	TYP	MAX	UNIT
Peak Inverse Voltage (PIV)	-	-	-		Vdc
S25A305HE S25A310HE S25A315HE				50 100 150	
Average DC Output Current (I_o)	$T_C = 55^\circ\text{C}$ $T_C = 100^\circ\text{C}$ $T_C = 125^\circ\text{C}$	-	-	25 18 12.5	Amps
Average DC Output Current Ambient Temp. (no heat sink) (I_o)	$T_A = 25^\circ\text{C}$ $T_A = 55^\circ\text{C}$ $T_A = 100^\circ\text{C}$	-	-	7.5 6.25 3.5	Amps
Peak Single Cycle Surge Current (I_{FSM})	$t_p = 8.3$ ms Single Half Cycle Sine Wave, Superimposed On Rated Load	-	-	150	Amps(pk)
Thermal Resistance (θ_{JL})	-	-	-	1.5	$^\circ\text{C/W}$
Operating and Storage Temp. (T_{op} & T_{stg})	-	-55	-	+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	CONDITIONS	MIN	TYP	MAX	UNIT
Maximum Forward Voltage (V_f)	$I_f = 6\text{A}$ (300 μsec pulse, duty cycle < 2%)	-	-	1.0	Volts
Maximum Instantaneous Reverse Current At Rated (PIV)	$T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$	-	-	10 100	μAmps
Reverse Recovery Time (t_{rr})	$I_f = 0.5\text{A}$, $I_r = 1.0\text{A}$, $I_{rr} = 0.25\text{A}$	-	-	30	nsec

MECHANICAL DIMENSIONS: In Inches / mm

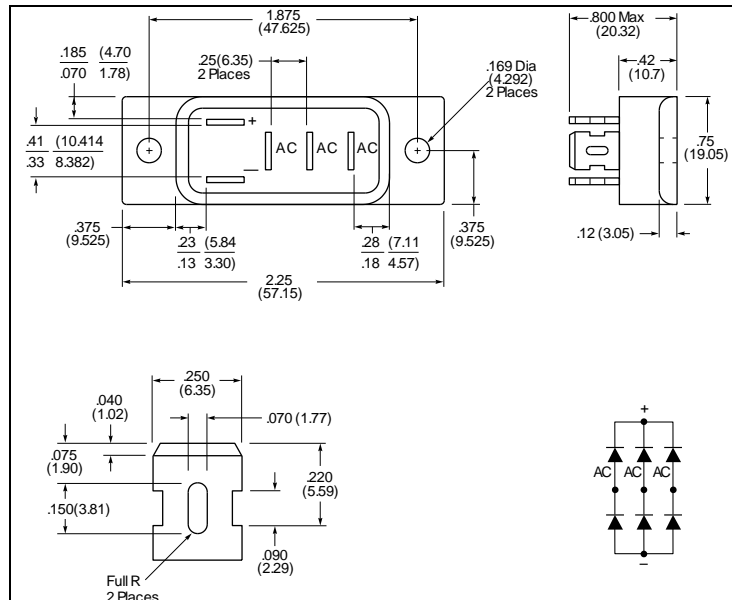


FIG. 404

Note: Case finish - Black Anodized