


## Features

- High-speed:  $t_{PD} = 2.6\text{ns}$  typical into  $50\text{pF}$  @  $5\text{V V}_{CC}$
- Unbuffered Output
- Broad operating range:  $V_{CC} = 1.65\text{V} - 5.5\text{V}$
- Power down high-impedance inputs/outputs
- Balanced output drive:  $\pm 8\text{mA}$  at  $3\text{V V}_{CC}$
- Package: 5-pin space saving SOT23 and SC70

## Pinout

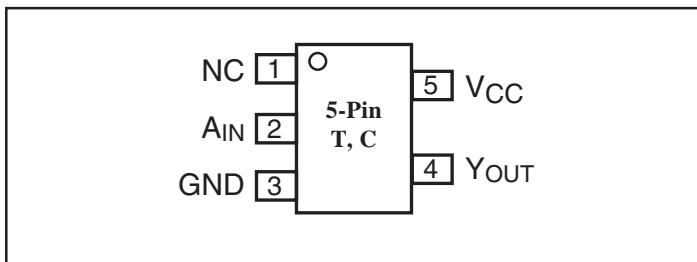


## Description

The PI74STX1GU04 is an unbuffered inverter that operates over the  $1.65\text{V}$  to  $5.5\text{V}$   $V_{CC}$  operating range.

Pericom's PI74STX series of products are produced using the Company's advanced submicron technology.

## Block Diagram

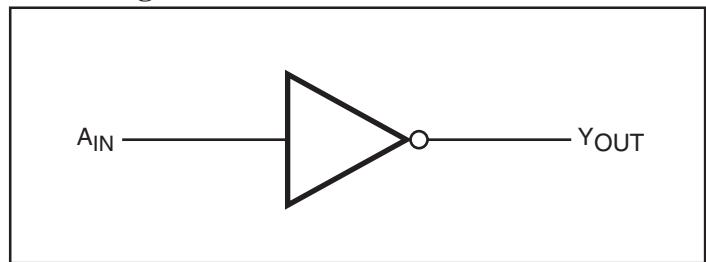

## Pin Description

Pin Names	Description
$A_{IN}$	Input
$Y_{OUT}$	Output

## Function Table

Inputs	Output
$A_{IN}$	$Y_{OUT}$
L H	H L

### Note:

H = HIGH Logic Level

L = LOW Logic Level

## Recommended Operating Conditions<sup>(1)</sup>

Parameter	Condition	Min.	Max.	Units
Supply Voltage ( $V_{CC}$ )	Input Voltage ( $V_{IN}$ )	1.65	5.5	V
Input Voltage ( $V_{IN}$ )		0	5.5	
Output Voltage ( $V_{OUT}$ )		0	$V_{CC}$	
Operating Temperature	Input Rise and Fall Time ( $t_r, t_f$ )	-40	85	$^{\circ}\text{C}$
		$V_{CC} = 1.8\text{V}, 2.5\text{V} \pm 0.2\text{V}$	0	20
		$V_{CC} = 3.3\text{V}, \pm 0.3\text{V}$	0	10
		$V_{CC} = 5.0\text{V}, \pm 0.5\text{V}$	0	5

### Note:

1. Unused inputs must be held HIGH or LOW. They may not float.

## Absolute Maximum Ratings

Supply Voltage (V <sub>CC</sub> ) .....	-0.5V to +6V	DC V <sub>CC</sub> /GND Current (I <sub>CC</sub> /I <sub>GND</sub> ) .....	±50mA
DC Input Voltage (V <sub>IN</sub> ) .....	-0.5V to +6V	Storage Temperature (T <sub>STG</sub> ) .....	-65°C to +150°C
DC Output Voltage (V <sub>OUT</sub> ) .....	-0.5V to +6V	Junction Lead Temperature (IOS) .....	200°C
DC Input Diode Current (I <sub>IK</sub> ) .....	-50mA to 20mA	Power Dissipation SOT23 .....	200mW
DC Output Diode Current (I <sub>OK</sub> ) .....	-50mA to 20mA	SC70 .....	150mW
DC Output Current (I <sub>OUT</sub> ) .....	±50mA		

**Note:**

Absolute maximum ratings are DC values beyond which the device may be damaged or have its useful life impaired. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Pericom does not recommend operation outside datasheet specifications.

## DC Electrical Characteristics (Over supply voltage and operating temperature ranges, unless otherwise specified)

Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	T <sub>A</sub> = +25°C			T <sub>A</sub> = -40 to +85°C		Units
				Min.	Typ.	Max.	Min.	Max.	
V <sub>IH</sub>	HIGH Level Input Voltage	1.8-2.7 3.0-5.5		0.85V <sub>CC</sub> 0.8V <sub>CC</sub>			0.85V <sub>CC</sub> 0.8V <sub>CC</sub>		
V <sub>IL</sub>	LOW Level Input Voltage	1.8-2.7 3.0-5.5					0.15V <sub>CC</sub> 0.2V <sub>CC</sub>		0.15V <sub>CC</sub> 0.2V <sub>CC</sub>
V <sub>OH</sub>	HIGH Level Output Voltage	1.65	V <sub>IN</sub> = V <sub>IL</sub>	I <sub>OH</sub> = -100µA	1.55	1.65		1.55	
		1.8			1.6	1.8		1.6	
		2.3			2.1	2.3		2.1	
		3.0			2.7	3.0		2.7	
		4.5			4.0	4.4		4.0	
		1.65		I <sub>OH</sub> = -4mA I <sub>OH</sub> = -4mA I <sub>OH</sub> = -8mA I <sub>OH</sub> = -12mA I <sub>OH</sub> = -16mA	1.29	1.42		1.29	
		2.3			1.9	2.14		1.9	
		3.0			2.4	2.75		2.4	
		3.0			2.3	2.61		2.3	
		4.5			3.8	4.07		3.8	
V <sub>OL</sub>	LOW Level Output Voltage	1.65	V <sub>IN</sub> = V <sub>IH</sub>	I <sub>OL</sub> = 100µA			0.00	0.1	0.1
		1.8					0.00	0.1	0.1
		2.3					0.00	0.1	0.1
		3.0					0.00	0.1	0.1
		4.5					0.00	0.1	0.1
		1.65		I <sub>OL</sub> = 4mA I <sub>OL</sub> = 4mA I <sub>OL</sub> = 8mA I <sub>OL</sub> = 12mA I <sub>OL</sub> = 16mA			0.08	0.24	0.24
		2.3					0.10	0.3	0.3
		3.0					0.18	0.4	0.4
		3.0					0.28	0.55	0.55
		4.5					0.31	0.55	0.55
I <sub>IN</sub>	Input Leakage Current	0 to 5.5	V <sub>IN</sub> = 5.5V, GND				±1		±10
I <sub>OFF</sub>	Power Off Leakage Current	0.0	V <sub>IN</sub> or V <sub>OUT</sub> = 5.5V	-1			1	-1	1
I <sub>CC</sub>	Quiescent Supply Current	1.65-5.5	V <sub>IN</sub> = 5.5V, GND				2.0		20

## AC Electrical Characteristics

Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	T <sub>A</sub> = +25°C			T <sub>A</sub> = -40°C to +85°C		Units	Fig. No.
				Min.	Typ.	Max.	Min.	Max.		
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay	1.8 ±0.15	C <sub>L</sub> = 15pF, R <sub>L</sub> = 1M ohm	0.7	5.0	6.3	0.7	6.9	ns	1
		2.5 ±0.2		0.5	3.0	3.7	0.5	4.1		
		3.3 ±0.3		0.5	2.3	3.0	0.5	3.3		
		5.0 ±0.5		0.5	1.8	2.4	0.5	2.6		
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay	3.3 ±0.3	C <sub>L</sub> = 50pF, R <sub>L</sub> = 500 ohms	0.5	3.2	4.5	0.5	5.0	ns	1
		5.0 ±0.5		0.5	2.6	3.4	0.5	3.7		
C <sub>IN</sub>	Input Capacitance	0			4					
C <sub>PD</sub>	Power Dissipation Capacitance <sup>(3)</sup>	3.3 5.0			6.3 9.5				pF	2

### Notes:

3. C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I<sub>CCD</sub>) at no output loading and operating at 50% duty cycle (see Figure 2). C<sub>PD</sub> is related to I<sub>CCD</sub> dynamic operating current by the expression: I<sub>CCD</sub> = (C<sub>PD</sub>)(V<sub>CC</sub>)(f<sub>IN</sub>) + (I<sub>CC</sub> static).

## AC Loading and Waveforms

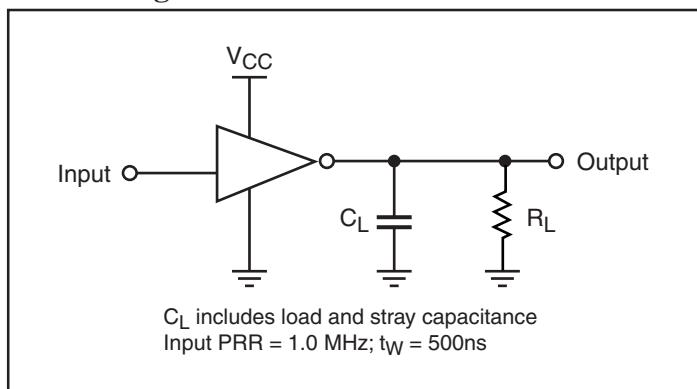


Figure 1. AC Test Circuit

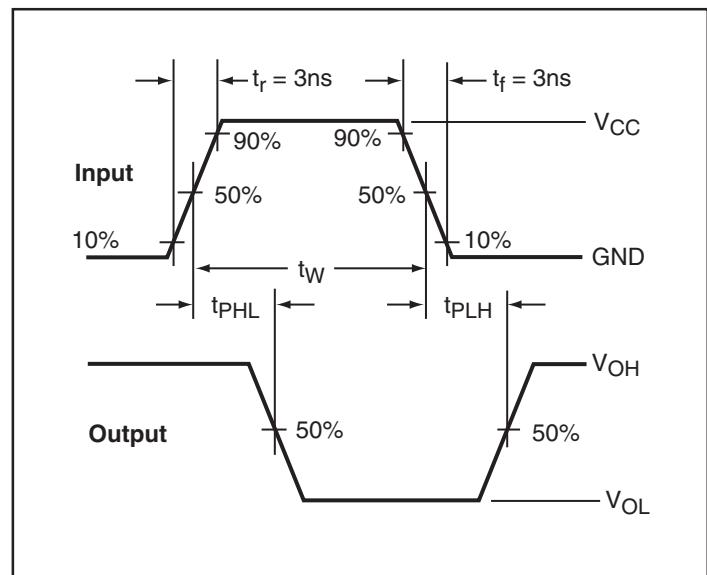


Figure 3. AC Waveforms



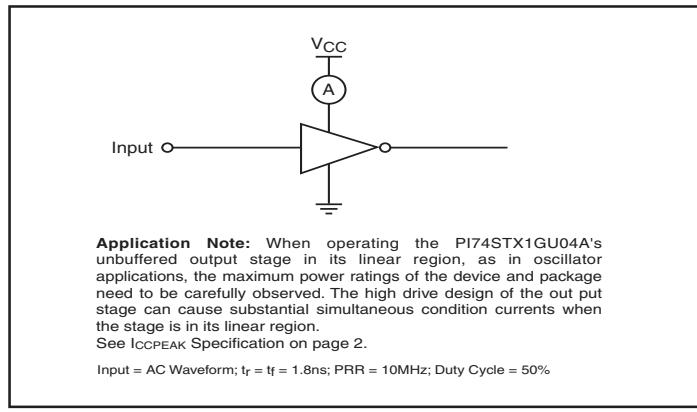


Figure 2. ICCD Test Circuit

### Packaging Mechanical: 5-Pin SOT23 (T)

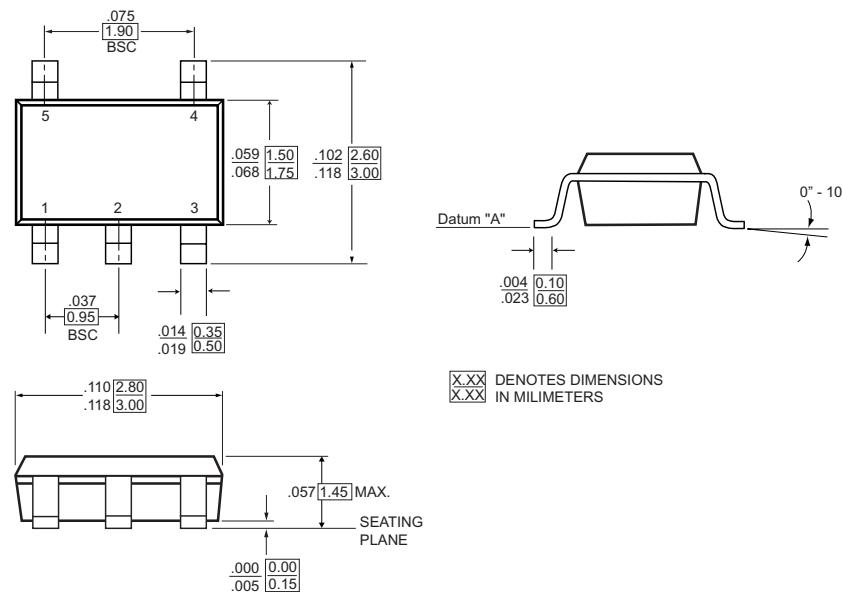

### Packaging Mechanical: 5-Pin SC70 (C)

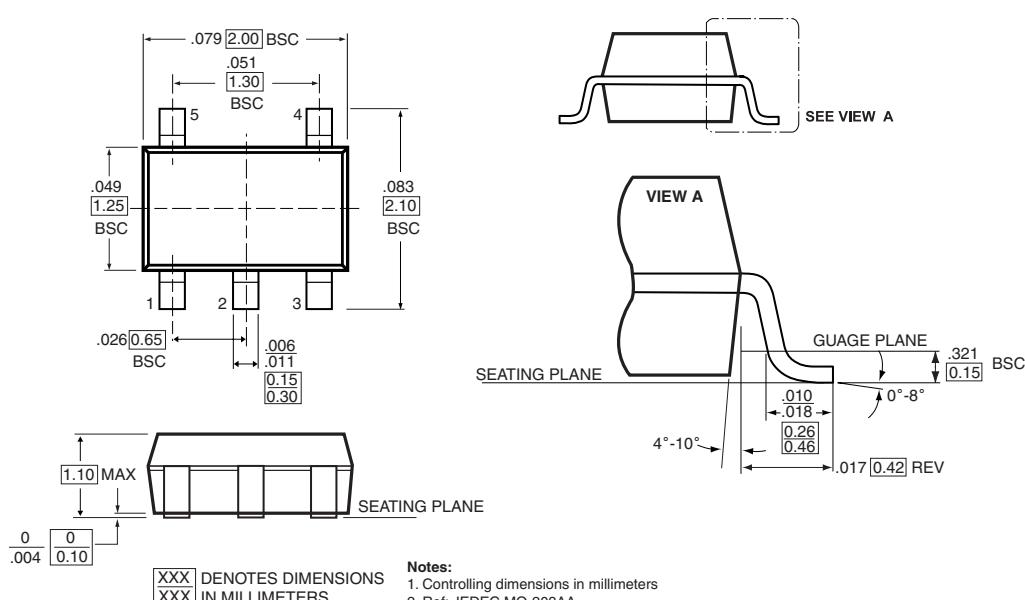

### Ordering Information

Ordering Code	Packaging Code	Package Type	Top Marking
PI74STX1GU04TX	T	5-Pin - SOT23	BH
PI74STX1GU04TEX	T	Pb-free, 5-Pin - SOT23	ĀBH
PI74STX1GU04CX	C	5-Pin - SC70	BH
PI74STX1GU04CEX	C	Pb-free 5-Pin - SC70	ĀBH

Pericom Semiconductor Corporation

1-800-435-2336 • Fax(408)435-1100• <http://www.pericom.com>