




ORDERING INFORMATION



1. DESCRIPTION

RS = Receptacle Strip (2.54mm Spacing)
 R2S = Receptacle Strip (2mm Spacing)***

2. CONFIGURATION

1 = Single Row, Straight Tails
 1R = Single Row, Right Angle
 2 = Double Row, Straight Tails
 2R = Double Row, Right Angle

3. POSITION

1 through 40 (1 and 1R)
 2 through 80 (2 and 2R)

4. PLATING


G = Gold over Nickel
 T = Tin

5. SPECIAL OPTIONS

L = Low Profile (.220) (1 and 2 configuration only)
 B = Box Contact (2R configuration only)

*** R2S is available in configuration '1' and '2' only with positions that are applicable to '1' and '2'.

RECEPTACLE STRIPS

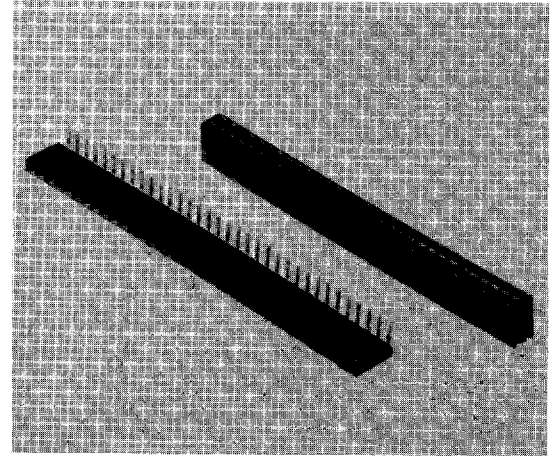

FEATURES:

- Single row available in 2 through 43 circuits
- Dual row available in 4 through 80 circuits
- Mates with PH series
- Tapered entry for easy pin insertion
- High reliability dual wipe contacts

RS SERIES SPECIFICATIONS:

MATERIALS:

Contacts: Copper alloy
 Plating: Gold over nickel or tin plated
 Insulator: Glass Filled Polyester UL 94V-0

ELECTRICAL:

Voltage Rating: 250 VAC RMS
 Current Rating: 1 Amp DC
 Insulation Resistance: 2000 megohms min.
 Contact Resistance: 5 milliohms typ. 15 max.
 Operating Temperature: -55 to + 125C

DIMENSIONAL DATA

All dimensions in inches and millimeters.

