


Note :

1. Available in 2 through 20 circuits
2. Material : UL 94V-0 Nylon 66
3. Pitch : 2.5mm
4. Rated Voltage : 250V DC/AC
5. Rated Current : 2A DC/AC
6. Withstand Voltage : 1,000VAC/minute
7. Insulation Resistion : 1,000M/min
8. Temperature Range : -25°C~85°C

Circuits	Part Number.	Dim A	Dim B	Dim C
2	2430S020000	2.500	6.00	3.00
3	2430S030000	5.000	8.50	5.50
4	2430S040000	7.500	11.00	8.00
5	2430S050000	10.000	13.50	10.50
6	2430S060000	12.500	16.00	13.00
7	2430S070000	15.000	18.50	15.50
8	2430S080000	17.500	21.00	18.00
9	2430S090000	20.000	23.50	20.50
10	2430S100000	22.500	26.00	23.00
11	2430S110000	25.000	28.50	25.50
12	2430S120000	27.500	31.00	28.00
13	2430S130000	30.000	33.50	30.50
14	2430S140000	32.500	36.00	33.00
15	2430S150000	35.000	38.50	35.50
16	2430S160000	37.500	41.00	38.00
17	2430S170000	40.000	43.50	40.50
18	2430S180000	42.500	46.00	43.00
19	2430S190000	45.000	48.50	45.50
20	2430S200000	47.500	51.00	48.00

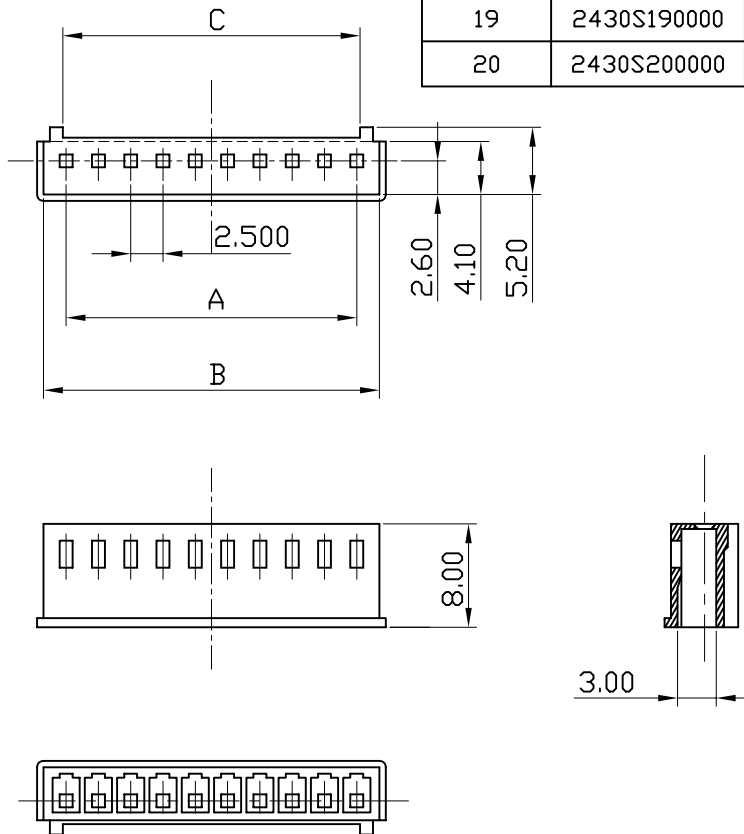

				LEOCO CORPORATION	APPROVED BY:	PARTS NO.:				
						2430S**0000				
				GENERAL TOLERANCE	CHECKED BY:	TITLE:				
				X. ±	X' ± 2°	2.5mm Pitch Housing				
B	E010162	Stephen		.X ± $\frac{0.30}{.012}$.X' ± 1°	DRAW BY:				
A	DWG REL.			.XX ± $\frac{0.20}{.008}$.XX' ± 0.5°	Stephen				
				.XXX ± $\frac{0.10}{.004}$.XXX' ± 0.1°	UNITS mm/in	SCALE	SIZE	SHEET	REV.
REV.	ECD. NO.	CHG	APPD.						A4	1/1