

# F female Header 2.54mm



RoHS



## Female Header 2.54mm 1 & 2 Row H=5.0mm Straight Type

### Specifications

Current Rate: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 1000V AC for one minute  
 Operation Temperature: -40°C to +105°C



### Material

Insulator: Polyester, UL 94V-0  
 ©Standard: PBT or Nylon 6T  
 Terminal: Copper Alloy  
 Plating: Gold Plated

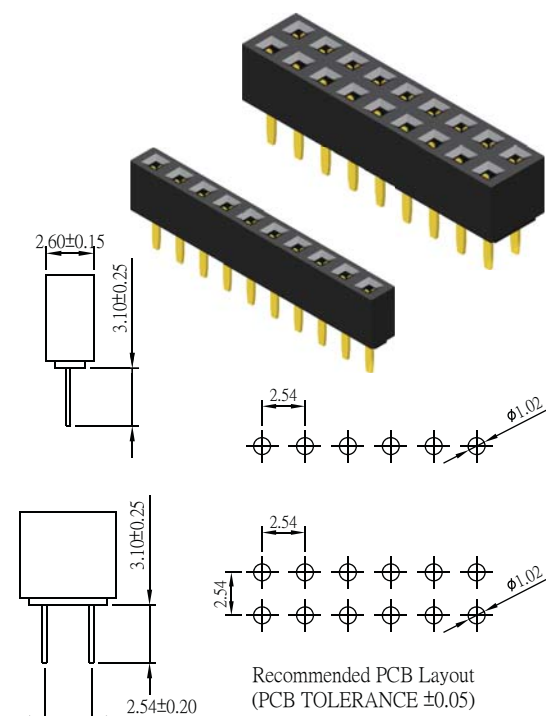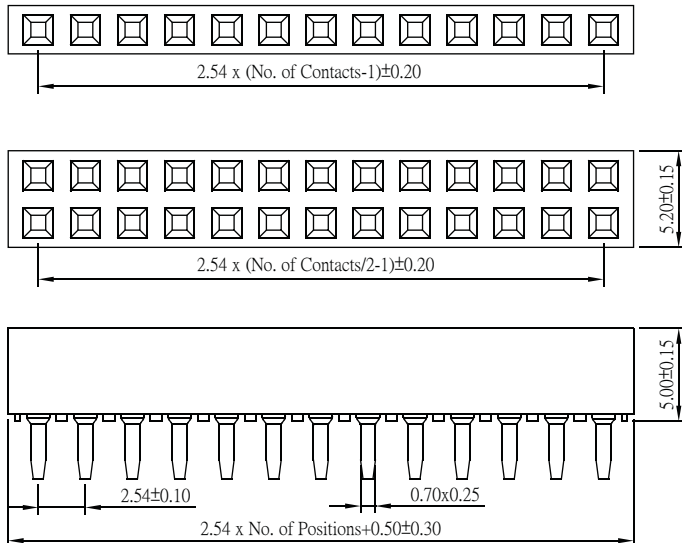

Part No.: PS1S50-1/2XX-L/U

## Female Header 2.54mm 1 & 2 Row H=5.7mm Straight Type

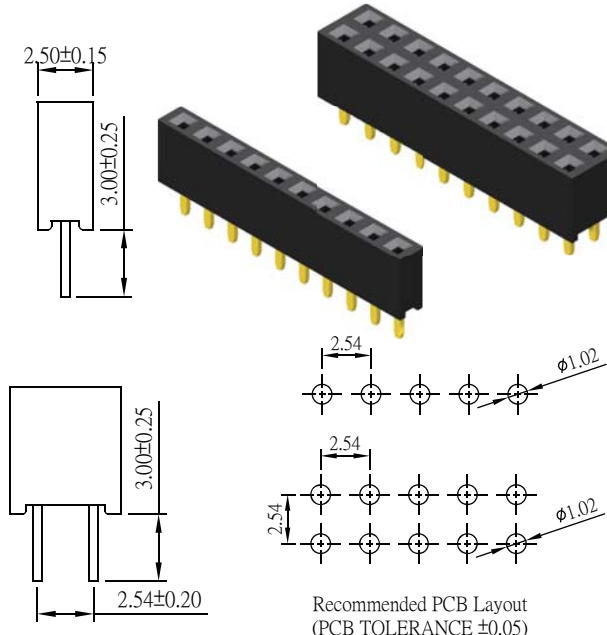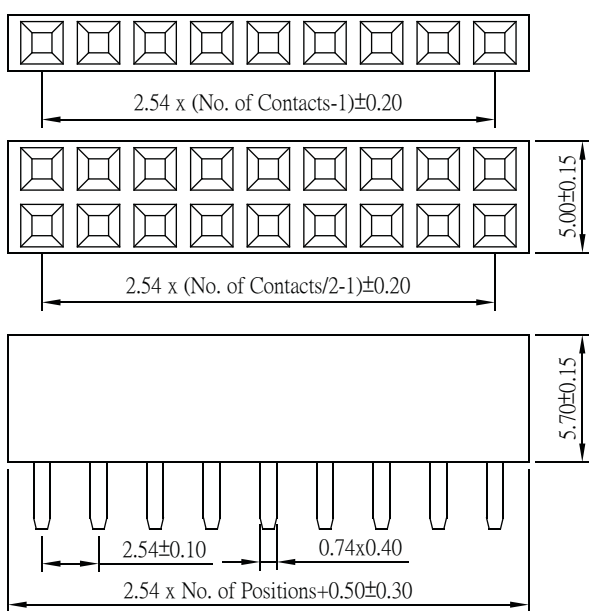

Part No.: PS1S57-1/2XX-L/U

## ORDER INFORMATION

