




CONNECTORS MANUFACTURER


2.5mm Wafer Right Angle / Straight Type

Specifications

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Terminal: Brass / Tin Plated
 Material: Nylon 66, UL94V-2




Part No.	Dimensions	
	A	B
2502R-02TW-L	2.50	5.00
2502R-03TW-L	5.00	7.50
2502R-04TW-L	7.50	10.00
2502R-05TW-L	10.00	12.50
2502R-06TW-L	12.50	15.00
2502R-07TW-L	15.00	17.50
2502R-08TW-L	17.50	20.00
2502R-09TW-L	20.00	22.50
2502R-10TW-L	22.50	25.00
2502R-11TW-L	25.00	27.50
2502R-12TW-L	27.50	30.00
2502R-13TW-L	30.00	32.50
2502R-14TW-L	32.50	35.00
2502R-15TW-L	35.00	37.50
2502R-16TW-L	37.50	40.00
2502R-17TW-L	40.00	42.50
2502R-18TW-L	42.50	45.00
2502R-19TW-L	45.00	47.50
2502R-20TW-L	47.50	50.00

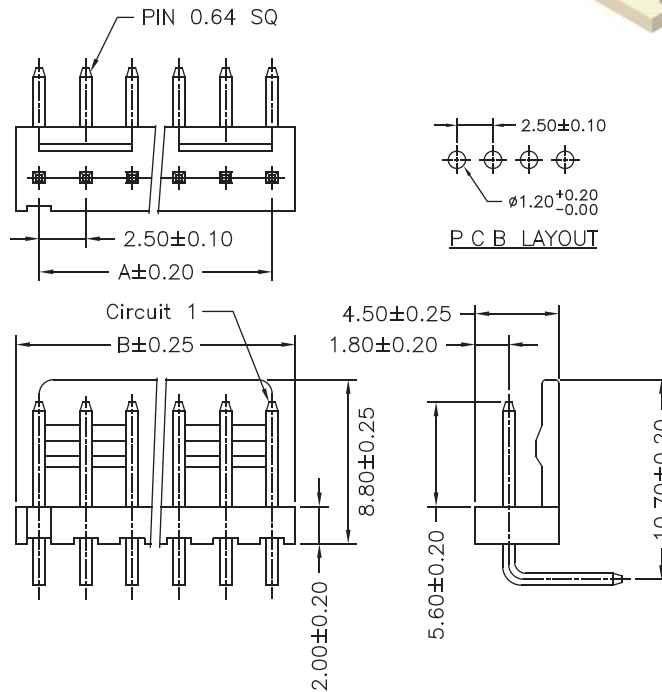


Part No.: 2502R-XTTW-L

Specifications

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Terminal: Brass / Tin Plated
 Material: Nylon 66, UL94V-2

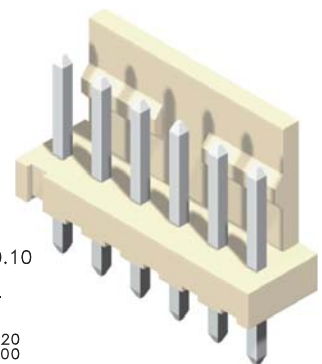

Part No.	Dimensions	
	A	B
2502S-02TW-L	2.50	5.00
2502S-03TW-L	5.00	7.50
2502S-04TW-L	7.50	10.00
2502S-05TW-L	10.00	12.50
2502S-06TW-L	12.50	15.00
2502S-07TW-L	15.00	17.50
2502S-08TW-L	17.50	20.00
2502S-09TW-L	20.00	22.50
2502S-10TW-L	22.50	25.00
2502S-11TW-L	25.00	27.50
2502S-12TW-L	27.50	30.00
2502S-13TW-L	30.00	32.50
2502S-14TW-L	32.50	35.00
2502S-15TW-L	35.00	37.50
2502S-16TW-L	37.50	40.00
2502S-17TW-L	40.00	42.50
2502S-18TW-L	42.50	45.00
2502S-19TW-L	45.00	47.50
2502S-20TW-L	47.50	50.00

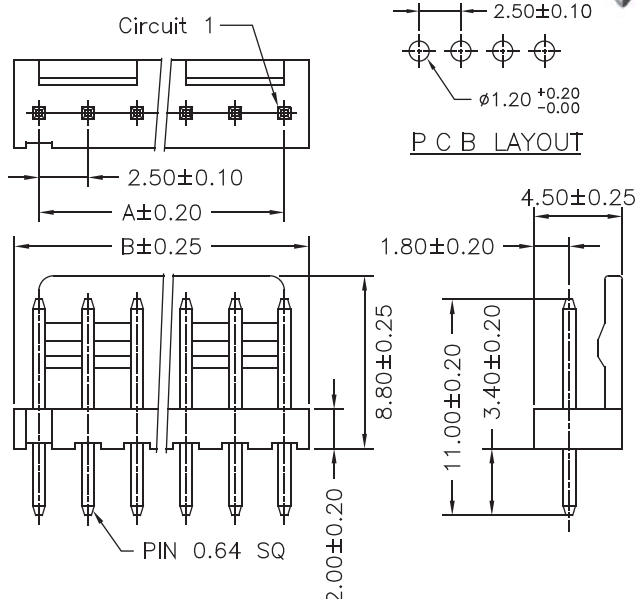

Part No.: 2502S-XTTW-L

Housing wafer Terminal



ROHS

CONNECTORS MANUFACTURER