


254323MR Series

Mates With SUYIN 254100, 254900, 254901, 254906 Series

Specifications:

- 4~50 Circuits
- Insulator Material : P.B.T UL 94V-0
- Operating Type Range : -40°C To +105°C
- Terminal Material : Brass
- Platings : Gold or Tin Plated
- Max. Current Rating : 1.5A
- Max. Voltage Rating : 250V AC
- Dielectric Strength : 500V AC (Min. 60 Seconds)

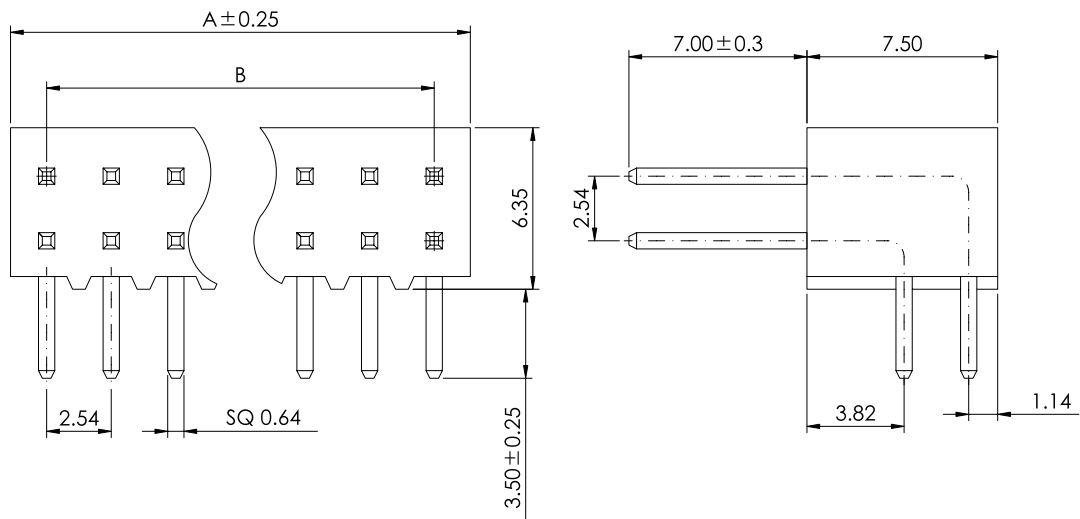

2.54
mm

Order Information


254323MR□□□□□00ZU
1 2 3 4 5

1. 'R' : Right Angle DIP Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package

'U' : Tube Package Without CAP

Reference Page 11

Recommended P.C.B. Layout

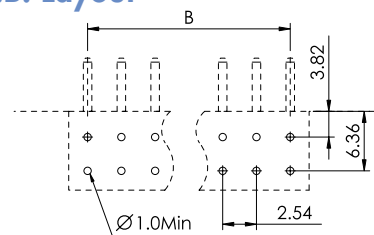

Dimension Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
254323MR004□□□00ZU	5.38	2.54	254323MR028□□□00ZU	35.86	33.02
254323MR006□□□00ZU	7.92	5.08	254323MR030□□□00ZU	38.40	35.56
254323MR008□□□00ZU	10.46	7.62	254323MR032□□□00ZU	40.94	38.10
254323MR010□□□00ZU	13.00	10.16	254323MR034□□□00ZU	43.48	40.64
254323MR012□□□00ZU	15.54	12.70	254323MR036□□□00ZU	46.02	43.18
254323MR014□□□00ZU	18.08	15.24	254323MR038□□□00ZU	48.56	45.72
254323MR016□□□00ZU	20.62	17.78	254323MR040□□□00ZU	51.10	48.26
254323MR018□□□00ZU	23.16	20.32	254323MR042□□□00ZU	53.64	50.80
254323MR020□□□00ZU	25.70	22.86	254323MR044□□□00ZU	56.18	53.34
254323MR022□□□00ZU	28.24	25.40	254323MR046□□□00ZU	58.72	55.88
254323MR024□□□00ZU	30.78	27.94	254323MR048□□□00ZU	61.26	58.42
254323MR026□□□00ZU	33.32	30.48	254323MR050□□□00ZU	63.80	60.96