

SINGLE ROW SIDE ENTRY HEADER



1244 SERIES. 1.25 (0.049") mm pitch.


General Features

- Available in 2 through 15 circuits
- Mates with 1.25 mm crimp housing 1240 serie
- Tin plated pin 0.35 mm. square
- Locking slots provide secure mating
- Polarization and low profile

Materials

- Insulator: nylon 66 UL 94 V-0
- Contact: Tin plated brass
- Operating temperature: -25°C to +85°C
- RoHS compliant

Dimension Information

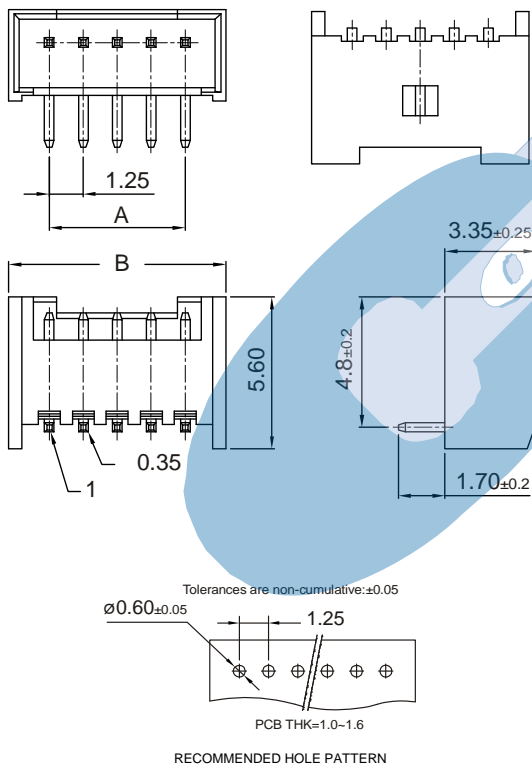


Electrical Features

- Voltage rating: < 100V
- Current rating: < 1 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 250 V AC/minute
- Insulation resistance: > 100 MΩ

Mechanical features

- Pin retention force to insulator: > 1.0 Kg f
- Durability: 25 cycles



1244 - T- XX- 1
1 2 3 4

1. Connector Serie

2. (T) Contacts Plating

- T = 2. Tin plated.
RECOMMENDED FINISH

3. (XX) Number of circuits

- Available in 2 through 15 circuits

Dimensions: (In mm.)

A = 1.25 x (XX-1)

B = 1.25 x (XX)+1.75

(XX) = Number of circuits