
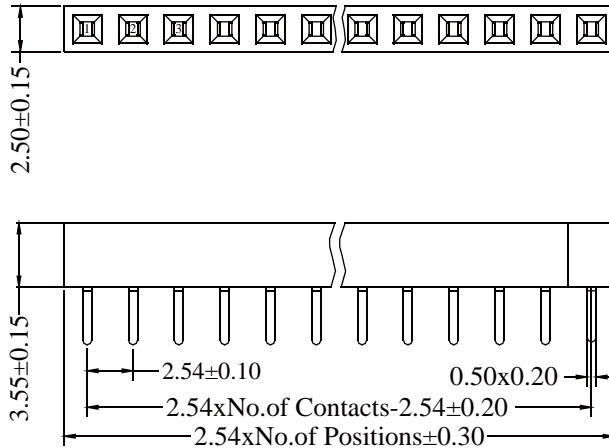



Female Header 2.54mm 1 Row H=3.55mm Contact Straight Type

Specifications
 Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material
 Insulator: Polyester, UL 94V-0
 Standard: Nylon 6T
 Terminal: Copper Alloy
 Plating: Gold Plated



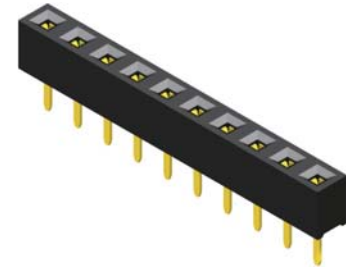


SECTION A-A



Part No.: PS1S35A-1XX-U

Female Header 2.54mm 2 Row H=3.55mm Contact Straight Type

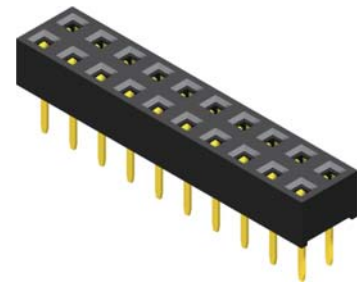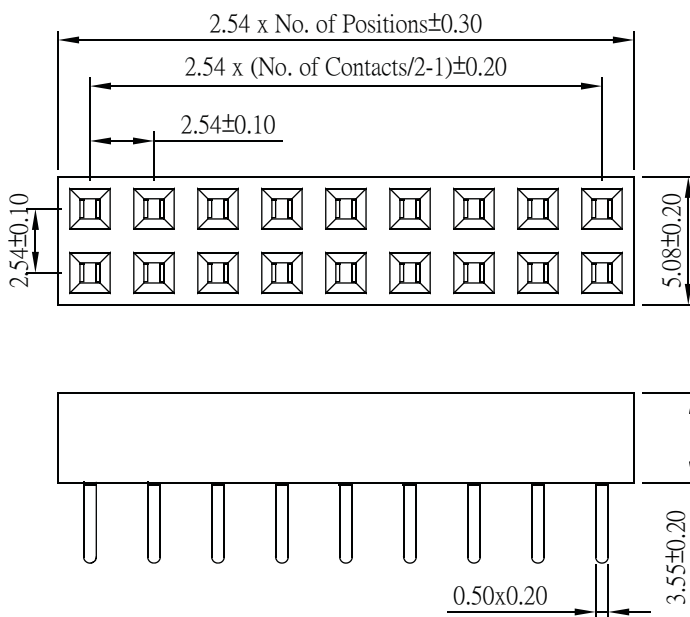

Part No.: PS1S35A-2XX-U

ORDER INFORMATION

