

F female Header 2.54mm



RoHS




Female Header 2.54mm 2 Row H=8.5mm Straddle Type With Bump

Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C





Material

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Terminal: Copper Alloy
 Plating: Gold Plated

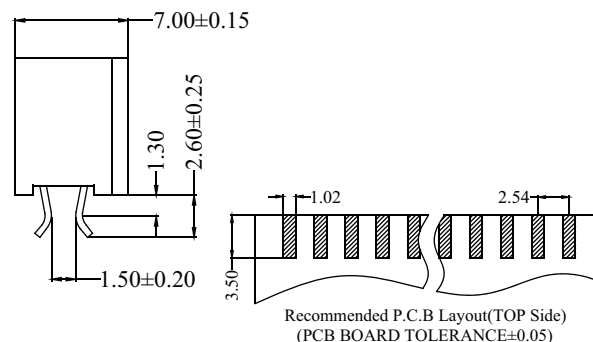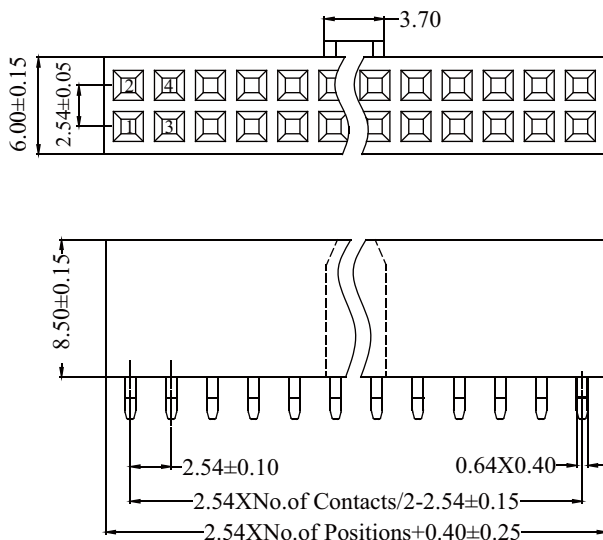

Part No.: PS1K85B-2XX-L/U

Female Header 2.54mm 1 & 2 Row H=8.5mm Press Fit Type

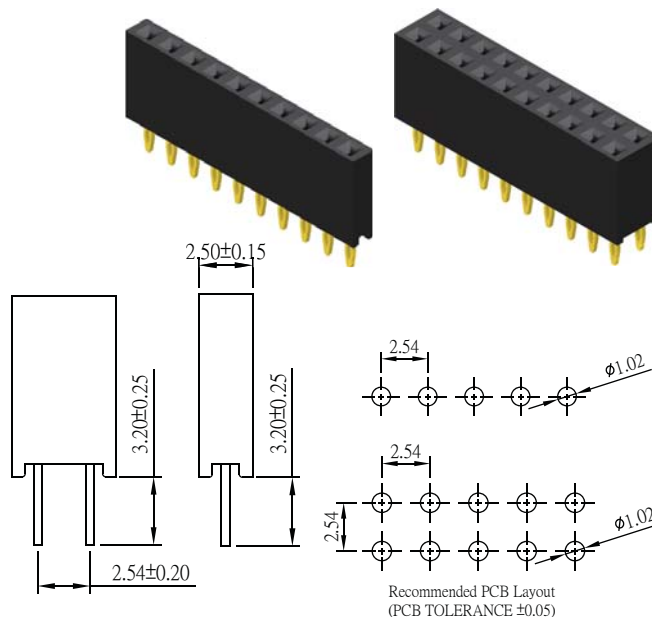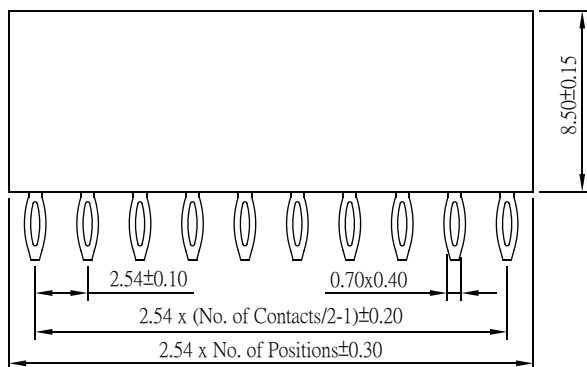

Part No.: PS1FS85-1/2XX-L

ORDER INFORMATION

