

FEATURES AND SPECIFICATIONS

Features and Benefits

- Sizes 5 to 10 circuits

Reference Information

Packaging: Bag

Mates With: [52075](#) and [52084](#)

Designed In: Millimeters

Electrical

Voltage: 125V

Current: 1.5A

Contact Resistance: 20mΩ max.

Dielectric Withstanding Voltage: 500V AC/1 min.

Insulation Resistance: 1000 MΩ min.

Physical

Housing: 6/6 nylon, UL 94V-0

Contact: Brass

Plating: Tin


Operating Temperature: -40 to +105°C



2.00mm (.079") Pitch Board-to-Board Header

53064





Vertical



2.00 to 2.50mm (.079 to .098") Pitch

B

CATALOG DRAWING (FOR REFERENCE ONLY)

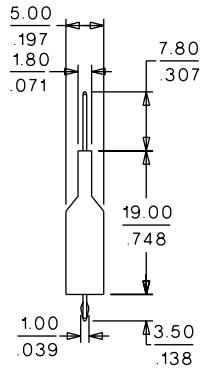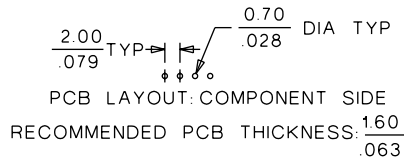

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.	Dimension	
		A	B
5	53064-0510	10.50 (.413)	8.00 (.315)
6	53064-0610	12.50 (.492)	10.00 (.394)
7	53064-0710	14.50 (.571)	12.00 (.472)
8	53064-0810	16.50 (.650)	14.00 (.551)
9	53064-0910	18.50 (.728)	16.00 (.630)
10	53064-1010	20.50 (.807)	18.00 (.709)