




FES8JT, FESF8JT, FESB8JT Series


Vishay Semiconductors
formerly General Semiconductor

Ultrafast Plastic Rectifiers

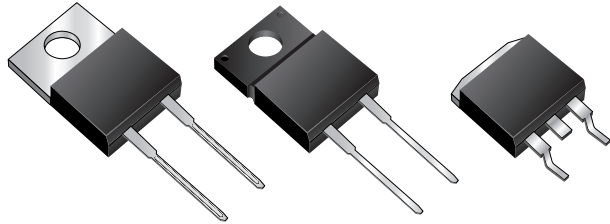


Reverse Voltage 50 to 600V
Forward Current 8.0 A
Reverse Recovery Time 35 to 50ns

TO-220AC (FES8JT)

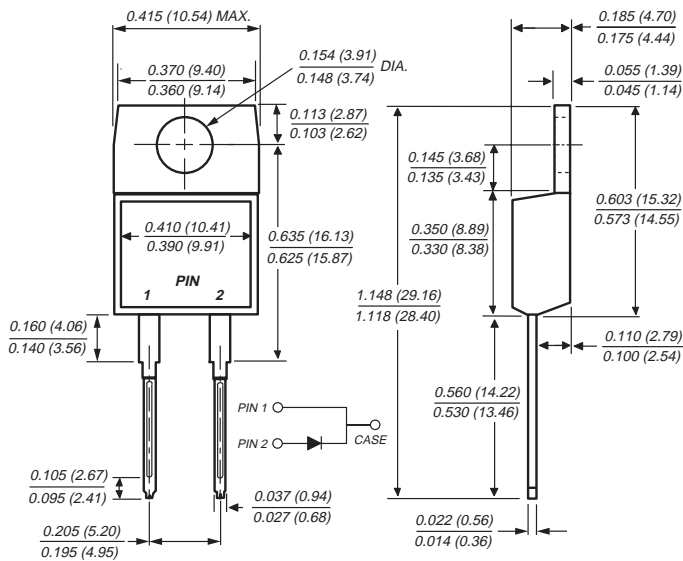


Mounting Pad Layout TO-263AB

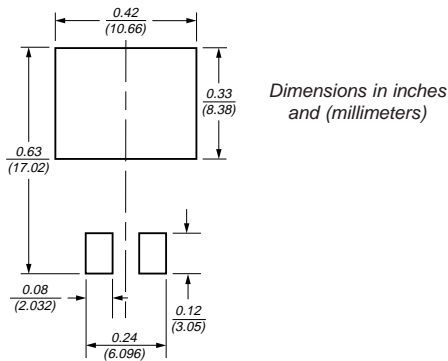


Dimensions in inches and millimeters

ITO-220AC (FESF8JT)

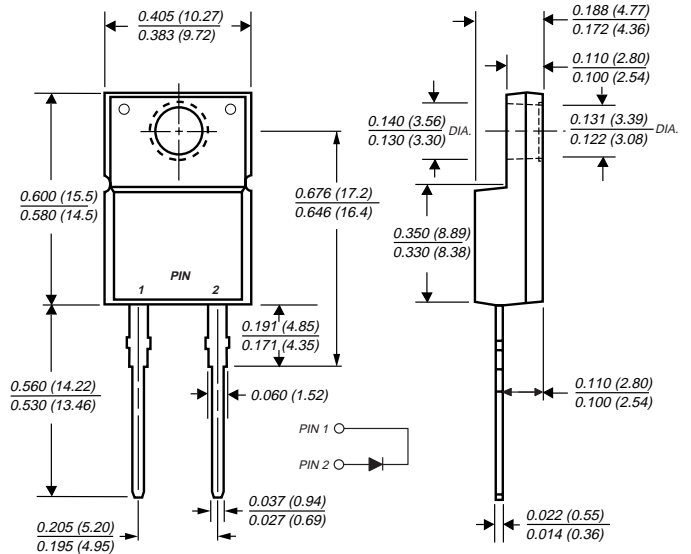

TO-263AB (FESB8JT)

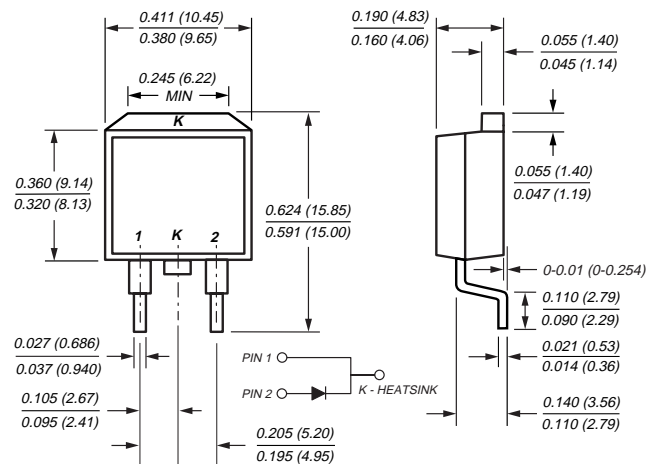

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junction
- Low leakage, high voltage
- High surge current capability
- Superfast recovery time, for high efficiency

Mechanical Data

Case: JEDEC TO-220AC, ITO-220AC & TO-263AB molded plastic body

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed: 250°C, 0.16" (4.06mm) from case for 10 seconds

Polarity: As marked **Mounting Position:** Any

Mounting Torque: 10 in-lbs maximum

Weight: 0.08 oz., 2.24 g

FES8JT, FESF8JT, FESB8JT Series

Vishay Semiconductors
formerly General Semiconductor



Maximum Ratings Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	FES 8AT	FES 8BT	FES 8CT	FES 8DT	FES 8FT	FES 8GT	FES 8HT	FES 8JT	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	350	420	V
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	500	600	V
Maximum average forward rectified current at T _C =100°C	I _{F(AV)}	8.0								A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at T _C =100°C	I _{FSM}	200				125				A
Operating storage and temperature range	T _J , T _{STG}	-55 to +150								°C
RMS Isolation voltage (FESF type only) from terminals to heatsink with t=1.0 second, RH≤30%	V _{ISOL}	4500 ⁽¹⁾ 3500 ⁽²⁾ 1500 ⁽³⁾								V

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	FES 8AT	FES 8BT	FES 8CT	FES 8DT	FES 8FT	FES 8GT	FES 8HT	FES 8JT	Unit	
Maximum instantaneous forward voltage @ 8.0A ⁽⁴⁾	V _F	0.95			1.30		1.50			V	
Maximum DC reverse current at rated DC blocking voltage T _C =25°C T _C =100°C	I _R	10 500								μA	
Maximum reverse recovery time at I _F =0.5A, I _R =1.0A, I _{rr} =0.25A	t _{rr}	35				50				ns	
Typical junction capacitance at 4V, 1MHz	C _J	85						50			pF

Thermal Characteristics (T_C = 25°C unless otherwise noted)

Parameter	Symbol	FES	FESF	FESB	Unit
Typical thermal resistance from junction to case	R _{θJC}	2.2	5.0	2.2	°C/W

Notes:

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
- (2) Clip mounting (on case), where leads do overlap heatsink
- (3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19")
- (4) Pulse test: 300μs pulse width, 1% duty cycle

Ordering Information

Product	Case	Package Code	Package Option
FES8AT thru FES8JT	TO-220AC	45	Anti-Static tube, 50/tube, 2K/carton
FESF8AT thru FESF8JT	ITO-220AC	45	Anti-Static tube, 50/tube, 2K/carton
FESB8AT thru FESB8JT	TO-263AB	31 45 81	13" reel, 800/reel, 4.8K/carton Anti-Static tube, 50/tube, 2K/carton Anti-Static 13" reel, 800/reel, 4.8K/carton



Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Maximum Forward Current Derating Curve

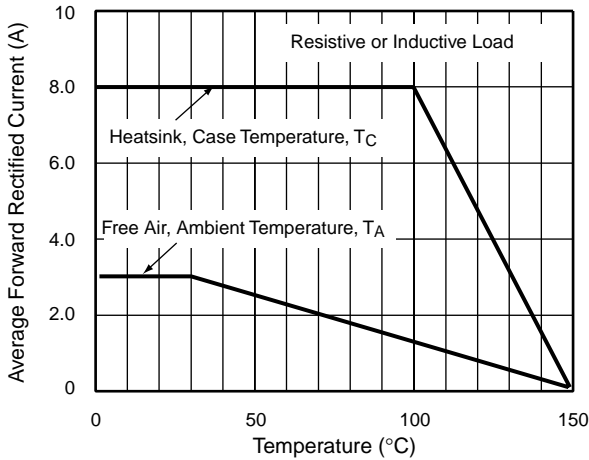


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

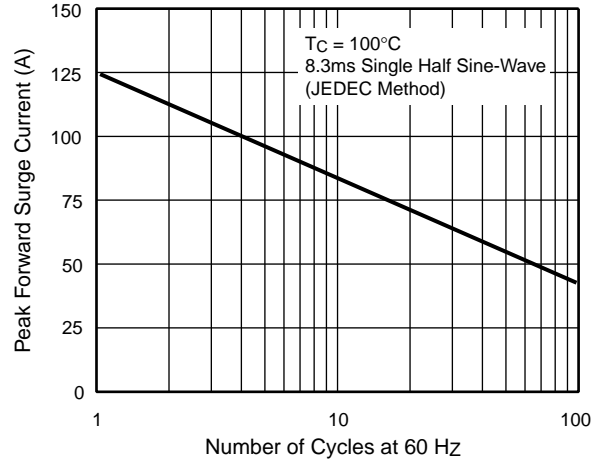


Fig. 3 – Typical Instantaneous Forward Characteristics

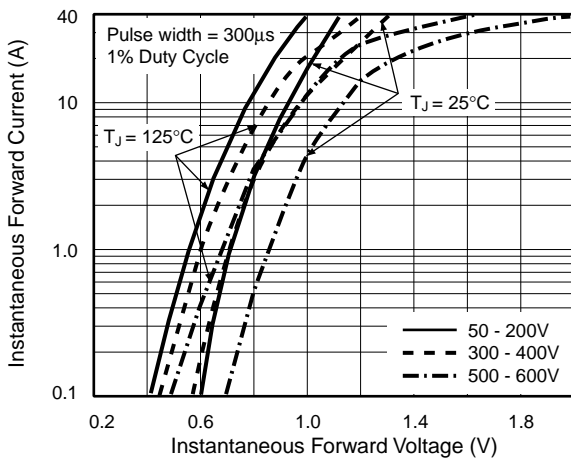


Fig. 4 – Typical Reverse Leakage Characteristics


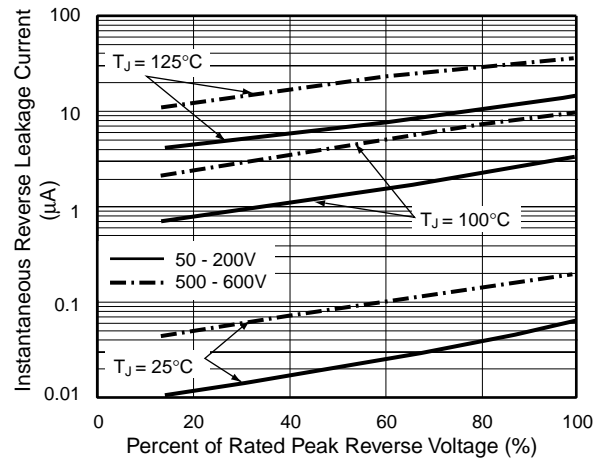


Fig. 5 – Typical Junction Capacitance



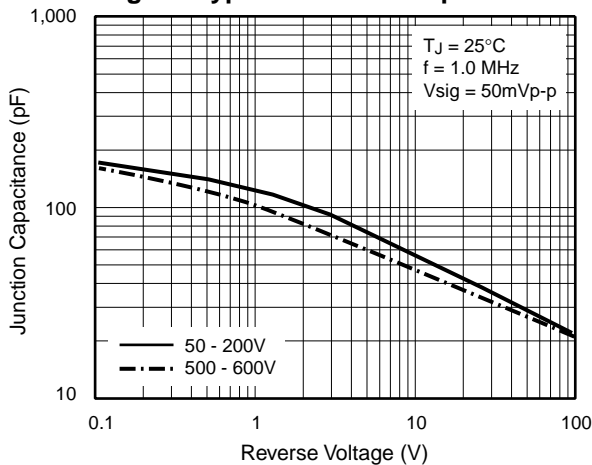

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.